

# R454b Refrigerant

# SUBMITTAL DATA SHEET



Series Name: EP High Tier Series  
Model Number: MSESU-H09B-2A/MO1SS-H09B-2A

## High Wall Heat Pump System

|               |               |
|---------------|---------------|
| Location:     | Approval:     |
| Engineer:     | Date:         |
| Submitted to: | Construction: |
| Submitted by: | Unit #:       |
| Reference:    | Drawing #:    |



## INDOOR SPECIFICATION

|                                           |                               |
|-------------------------------------------|-------------------------------|
| Indoor Air Flow (Turbo/H/M/L/Si) (CFM)    | 559 / 424 / 212 / 153 / 153   |
| Indoor Noise Level (Turbo/H/M/L/Si) (dBA) | 42 / 42 / 33 / 23 / 19        |
| Dimension (W×D×H)                         | inch 38 x 9-3/8 x 12-1/2      |
|                                           | mm 965 x 239 x 319            |
| Package (W×D×H)                           | inch 43-1/8 x 12-3/4 x 15-3/4 |
|                                           | mm 1095 x 325 x 400           |
| Net/Gross Weight                          | lbs 28 / 37                   |
|                                           | kg 12.8 / 16.7                |

## OUTDOOR SPECIFICATION

|                              |                               |
|------------------------------|-------------------------------|
| Compressor Type              | ROTARY                        |
| Compressor Model             | KTM110D79UFZA3                |
| Refrigerant                  | R454B                         |
| Refrigerant Oil Charge(mL)   | 500                           |
| Refrigerant Oil              | VG74                          |
| Outdoor Air Flow (Max) (CFM) | 1,471                         |
| Outdoor Noise Level (dBA)    | 57                            |
| Dimension (W×D×H)            | inch 35 x 13-1/2 x 26-1/2     |
|                              | mm 890 x 342 x 673            |
| Package (W×D×H)              | inch 39-1/8 x 15-5/8 x 29-1/8 |
|                              | mm 995 x 398 x 740            |
| Net/Gross Weight             | lbs 100 / 108                 |
|                              | kg 45.2 / 48.9                |

## EFFICIENCY

| Cooling    | Heating      |
|------------|--------------|
| SEER2 33.3 | HSPF2-4 22.0 |
| EER2 17.0  | COP 3.60     |

## PERFORMANCE of Cooling

| Cooling (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| Rated Capacity                  | 9,000                                               |
| Min/Max Capacity                | 3,100~16,500                                        |
| Moisture Removal(L/h)           | 0.5                                                 |
| Standard Operating Range(*F/*C) | -22~122 (-30 ~ 50)                                  |
| Conditions:                     | Indoor: 80°F DB/67°F WB<br>Outdoor: 95°F DB/75°F WB |

## PERFORMANCE of Heating

| Heating (Btu/hr)                |                                                     |
|---------------------------------|-----------------------------------------------------|
| 1. @ 47°F Rated                 | 12,000                                              |
| 1. @ 47°F Min/Max Capacity      | 4,100~17,200                                        |
| 2. @ 17°F Rated                 | 11,000                                              |
| 3. @ 5°F Rated: Capacity / COP  | 13,500 / 2.00                                       |
| 3. @ 5°F Max: Capacity          | 13,500                                              |
| Standard Operating Range(*F/*C) | -22~75 (-30 ~ 24)                                   |
| 1. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 47°F DB/43°F WB |
| 2. Conditions:                  | Indoor: 70°F DB/60°F WB<br>Outdoor: 17°F DB/15°F WB |
| 3. Conditions                   | Indoor: 70°F DB/60°F WB<br>Outdoor: 5°F DB/5°F WB   |


## ELECTRICAL

|                                  |                                        |
|----------------------------------|----------------------------------------|
| Power Supply                     | 208 / 230V,60Hz,1Ph                    |
| System MCA                       | 16.0                                   |
| Connection Wiring                | AWG 14 / 4                             |
| System MOCP                      | 20.0                                   |
| Compressor RLA                   | 11.6                                   |
| Outdoor Fan Motor RLA            | 0.7                                    |
| Outdoor Fan Motor W              | 80                                     |
| Indoor Fan Motor RLA             | 0.7                                    |
| Indoor Fan Motor W               | 60                                     |
| System Power Input @ Cooling (W) | 529 (180 ~ 1,380)                      |
| System Power Input @ Heating (W) | 977 (200 ~1,585)                       |
| MCA: Min. circuit amps (A)       | MOCP: Max. over current protection (A) |
| RLA: Rated load amps (A)         | W: Fan motor rated output (W)          |

## PIPING


|                                               |               |
|-----------------------------------------------|---------------|
| Throttle type(Indoor)                         | N/A           |
| Throttle type(Outdoor)                        | EXV           |
| Liquid Size                                   | 1/4" (6.35mm) |
| Gas Size                                      | 3/8" (9.52mm) |
| Max. Piping Length(ft/m)                      | 82 (25)       |
| Max. Height Difference(ft/m)                  | 49 (15)       |
| Max. Pre-charged Length(ft/m)                 | 25 (7.5)      |
| Refrigerant Pre-charged Amount(oz/g)          | 44 (1.25)     |
| Additional Charge of Refrigerant((oz/ft)/(g/r | 0.16 (15)     |
| Connection Method                             | Flared        |

# Indoor Unit Dimension

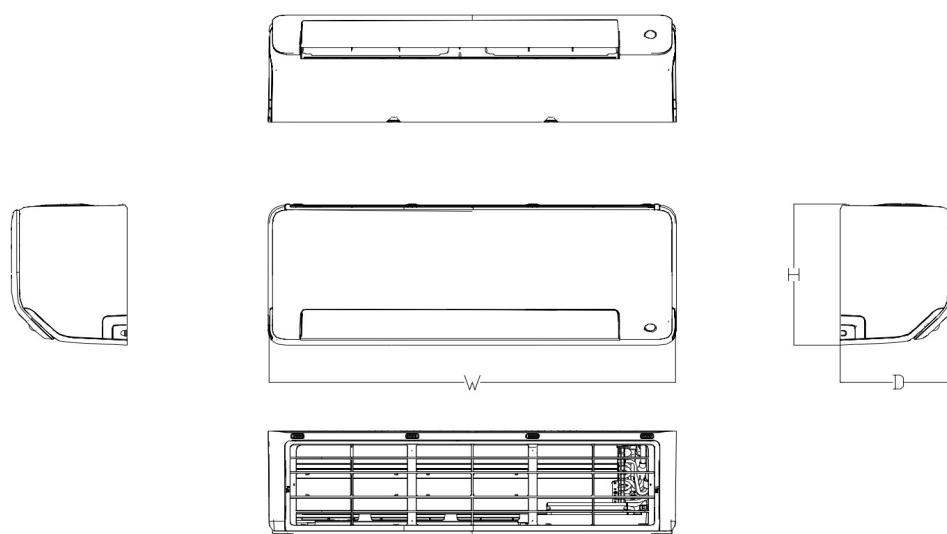

| Capacity | Body Code | Unit | W      | D      | H      |
|----------|-----------|------|--------|--------|--------|
| 9 k~12k  | C         | mm   | 965    | 239    | 319    |
|          |           | inch | 38     | 9-3/8  | 12-1/2 |
| 18k      | D         | mm   | 1140   | 275    | 370    |
|          |           | inch | 44-7/8 | 10-7/8 | 14-1/2 |




# Installation Instruction

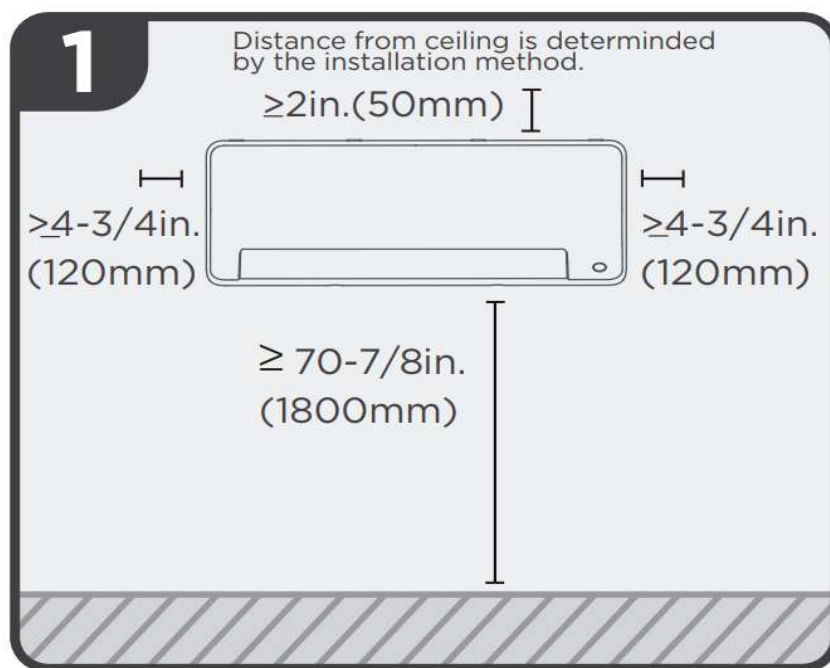


Select Installation Location

### Outdoor Unit Dimension

Unit: inch (mm)

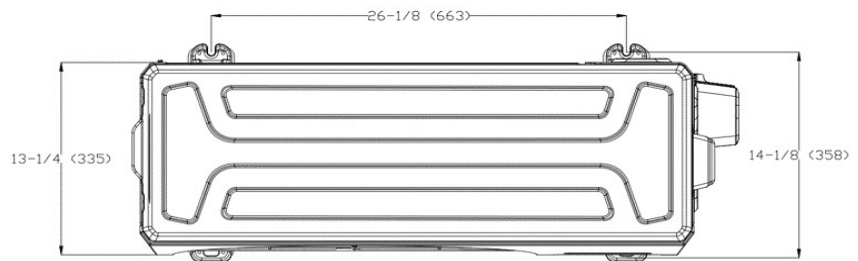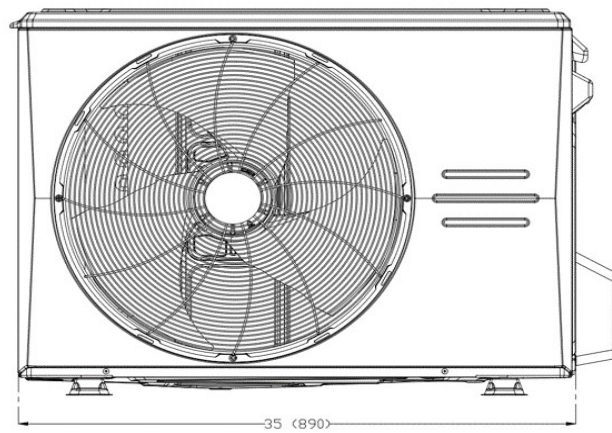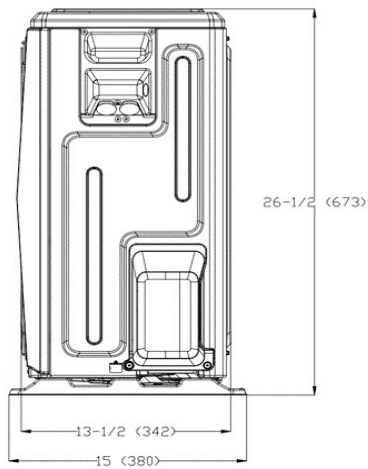

### Installation Instruction

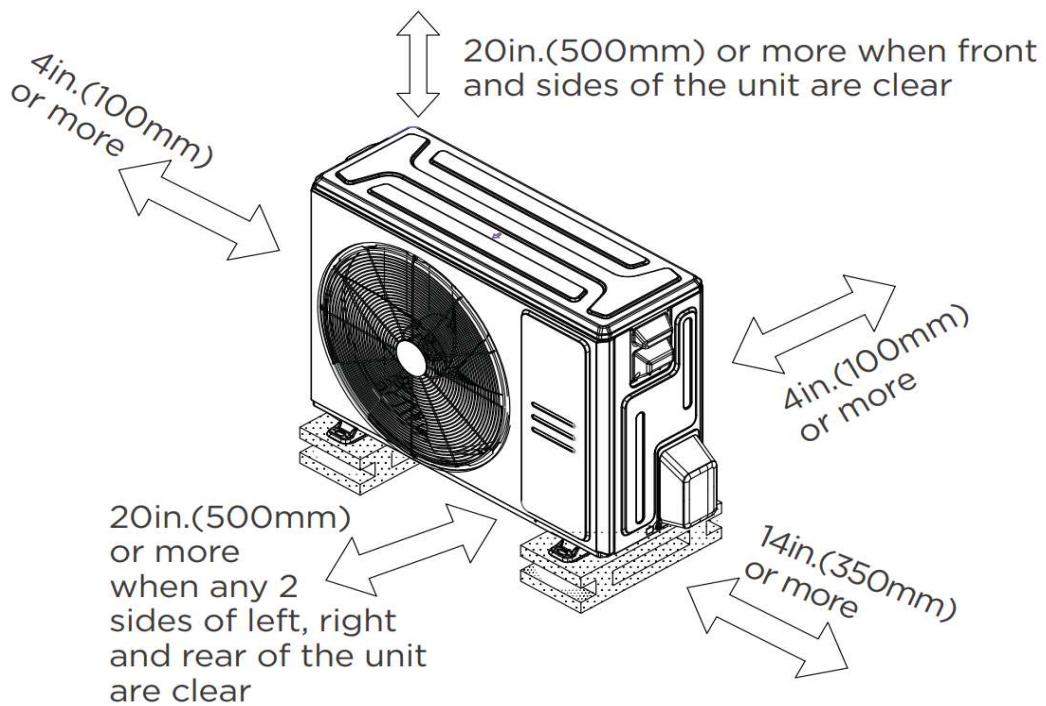

## FEATURES

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
  - Two-way communication wired controller:120N(X6)
  - Two-way communication wired controller with built-in Wi-Fi: 120N (X6W)
  - Infrared wired controller: 120L
  - Wireless remote controller
  - Third-Party 24V Thermostat\*

\*24V interface is required.