


## ASSEMBLY INSTRUCTIONS

# LACAPO


## 223410107

### Parts Included:


Mounting Strap




Mounting Screw



Wire Connector




Outlet Box screw



### CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- ☐ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



- ☐ Consult a qualified electrician if you have any electrical questions or need to replace the driver.

### Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

# Arnsberg

customerservice@arnsberg.com


www.arnsberg.com

## ASSEMBLY INSTRUCTIONS

### LACAPO

## 223410107

#### Mounting Instructions:

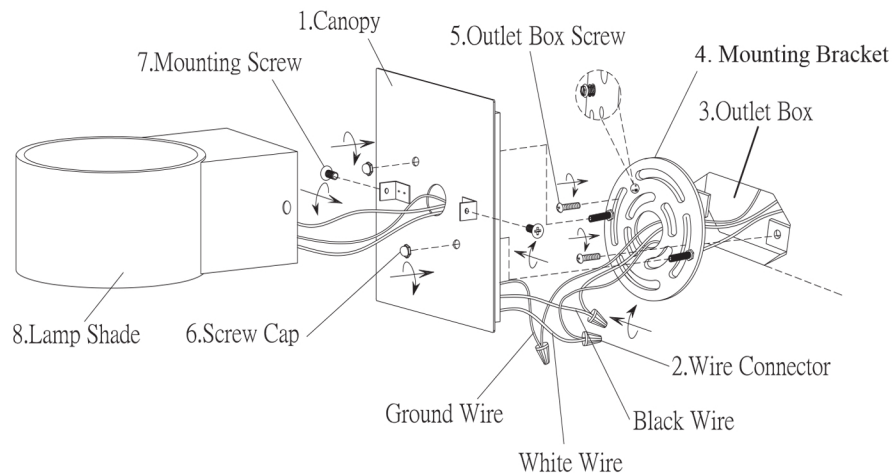

#### Assembly Instructions:

1. Mount the Mounting Bracket (#4) to the Outlet Box (#3) using the Outlet Box Screw (#5).

2. Connect the ground wire from the fixture to the ground wire from the Outlet Box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#3). Connect the black wire from the fixture to the black wire (live wire) of the Outlet Box (#3). Cover the connections using the Wire Connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#3). Note: If you have electrical questions, consult your local licensed electrician.

3. Place the Canopy (#1) over the Outlet Box (#3), allowing the tips off the screw to come out through the holes, put the Screw Cap (#6) and tighten them (#6) to secure the Canopy (#1)

4. Put on the Lamp Shade (#8) on to the Canopy (#1) and put the Mounting Screw (#7) through the holes to secure it with the Canopy (#1).

5. Installation is complete, Turn on the power at the circuit breaker of the fuse box. Turn the light switch on to activate the fixture.