
PARTS INCLUDED

Please begin installation by accounting for and familiarizing yourself with all included parts.

Wire Connector



Outlet Box Screw(#8-32)




Outlet Box Screw(#6-32)



CSA / UL SAFETY REQUIREMENTS

CSA / UL requires that these IMPORTANT SAFETY INSTRUCTIONS be listed;

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

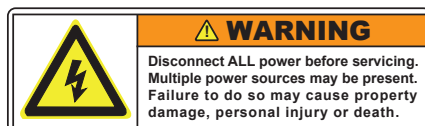


CARE INSTRUCTIONS

Arnsberg suggests using only micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

AURORA

223810209

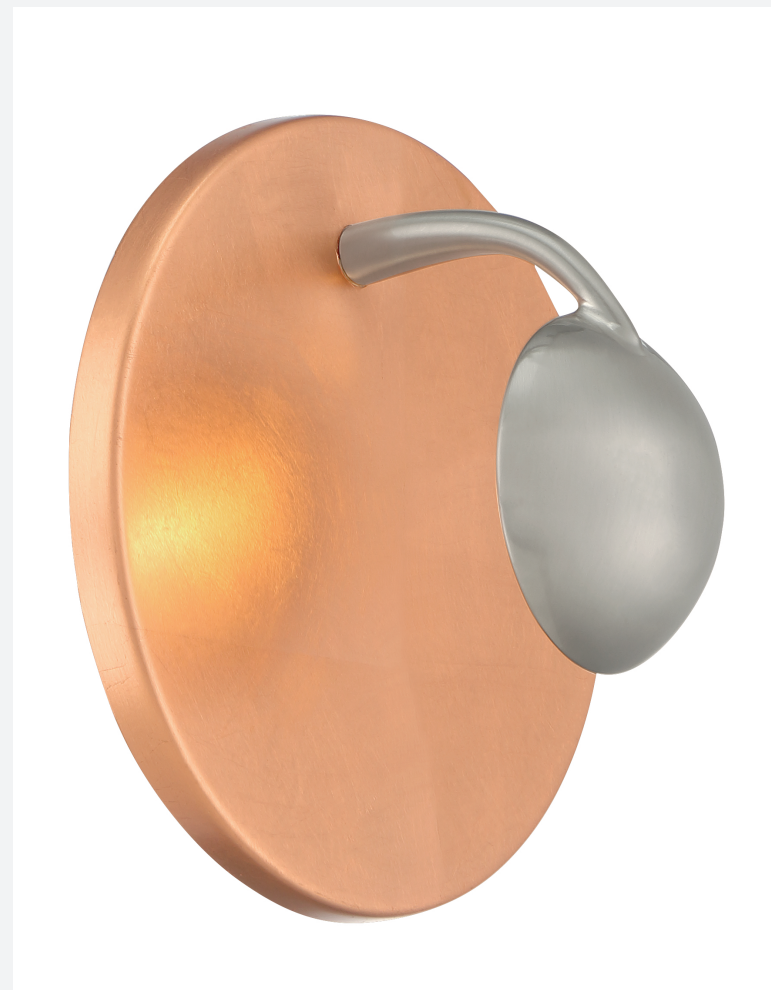

Arnsberg
Das Licht


customerservice@arnsberg.com
www.arnsberg.com

Arnsberg

Das Licht

customerservice@arnsberg.com
www.arnsberg.com

MOUNTING INSTRUCTIONS

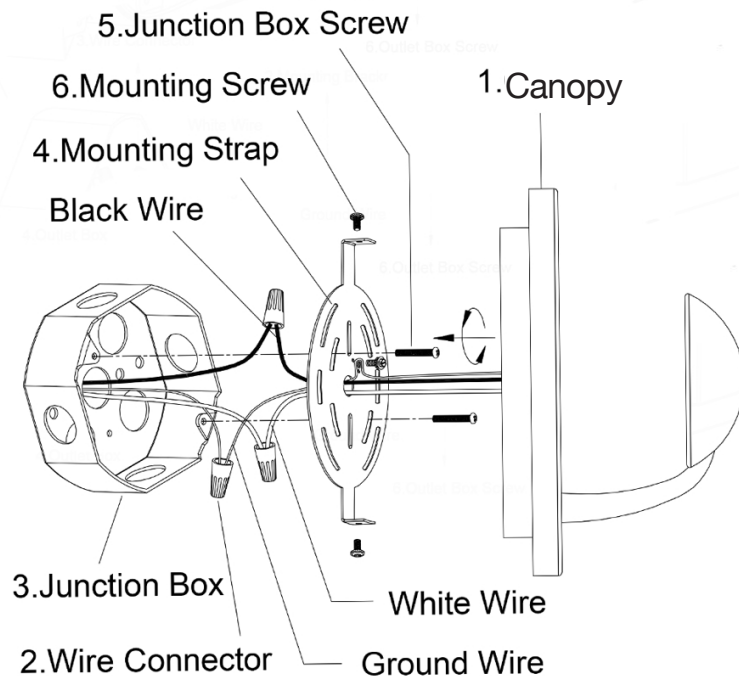

ASSEMBLY INSTRUCTIONS FOR

AURORA

223810209 / 79 / 89

ASSEMBLY INSTRUCTIONS

- 1 Mount the **Wire Connector (#2)** to the **Mounting Box (#4)** using the two **Mounting Screws (#6)**.
- 2 Connect the ground wire from the fixture and **Outlet Box** to the ground screw on the **Wire Connector (#2)**. Connect the white wire from the fixture to the white wire (neutral wire) from the **Mounting Strap (#4)**. Connect the black wire from the fixture to the black wire (live wire) from the **Mounting Strap (#4)**. Cover the connections using the **Junction Box (#3)**. Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the **Mounting Strap (#4)**. *Note: if you have electrical questions, consult your local electrical code for approved grounding methods.*
- 3 Please fix the **Fixture (#1)** to the **Wire Connector (#2)** using the two **Junction Box Screws (#5)**.
- 4 Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.