


Parts Included:

Mounting Bracket



Wire Connector



Mounting Screw




Outlet Box Screw



CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- ☐ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
- ☐ Consult a qualified electrician if you have any electrical questions or need to replace the driver.



Care Instructions


Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com

www.arnsberg.com

Mounting Instructions

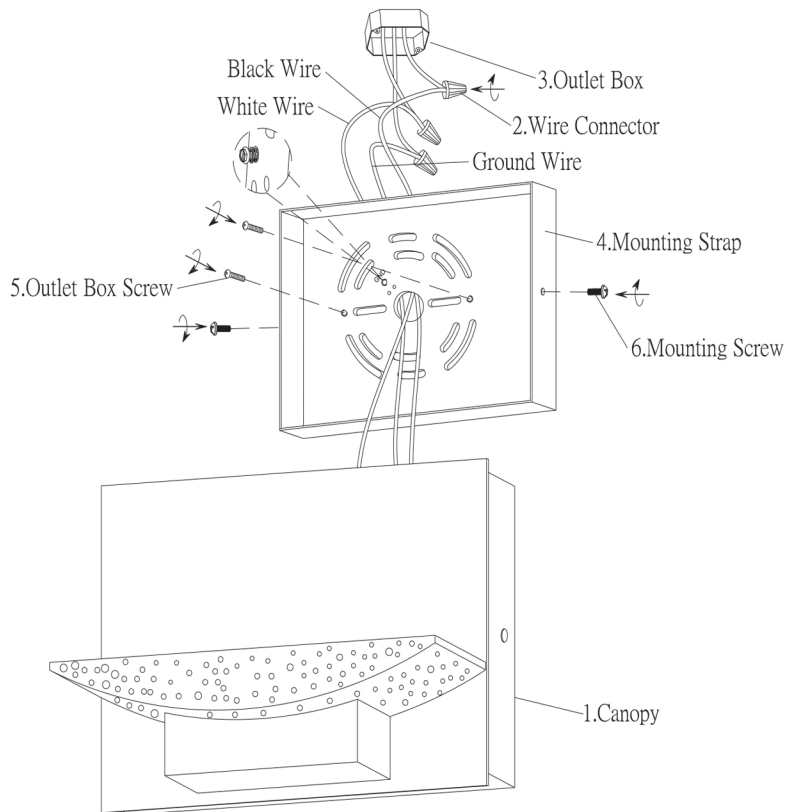

ASSEMBLY INSTRUCTIONS

H2O

282510106

Assembly Instructions

1. Screw the two Mounting Screws (#6) into the Mounting Strap (#4). Mount the Mounting Strap (#4) to the Outlet Box (#3) using the two Outlet Box Screw (#5). Make sure the heads of the Mounting Screws (#6) are facing outside when the Mounting Strap (#4) is attached to the Outlet Box (#3).
2. Connect the ground wire from the fixture to the ground wire from the Outlet Box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#3). Connect the black wire from the fixture to the black wire (live wire) from the Outlet Box (#3). Cover the connections using the Wire Connectors (#2). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#3). Note: If you have electrical questions, consult your local licensed electrician.
3. Place the Canopy (#1) over the Outlet Box (#3). Put the Mounting Screws (#6) into the holes of the Canopy (#1) and the Outlet Box (#3). Screw the Mounting Screws (#6) to secure the Canopy (#1).
4. Before completing Installation, please cover the lampshade (#7) on the corresponding rotary buttons position of the chassis, and lock the lampshade according to the arrow direction.
5. Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.