

customerservice@arnsberg.com

www.arnsberg.com

# ASSEMBLY INSTRUCTIONS

# **CANNES** 300100106

### Parts Included:

Mounting Bracket



Wire Connector



Mounting Screw



Outlet Box Screw





## **CSA / UL Safety Requirements**

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

☐ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



☐ Consult a qualified electrician if you have any electrical questions or need to replace the driver.


### **Care Instructions**

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.



www.arnsberg.com

### Mounting Instructions

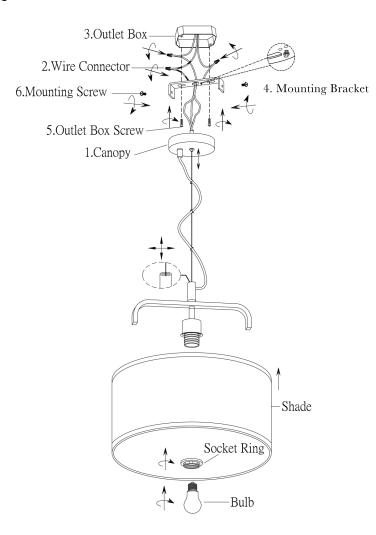

# ASSEMBLY INSTRUCTIONS CANNES 300100106

### **Assembly Instructions**

- 1. Mount the mounting bracket (#4) to the outlet box (#3) using the outlet box screw (#5).
- 2. Connect the ground wire from the fixture to the ground wire from the outlet box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#3). Connect the black wire from the fixture to the black wire (live wire) of the outlet box (#3). Cover the connections using the wire connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the outlet box (#3). Note: If you have electrical questions, consult your local licensed electrician.
- 3. Place the canopy (#1) over the outlet box (#3), put the mounting screw (#6) through the holes, and tighten the mounting screw (#6) to secure the canopy (#1)
- 4. Before completing installation, please cover the lampshade on the corresponding rotary buttons positions of the chassis, and lock the lampshade according to the arrow direction.
- 5. installation is complete, Turn on the power at the circuit breaker of the fuse box. Turn the light switch on to activate the fixture.