


## ASSEMBLY INSTRUCTIONS

# VANCOUVER


### 656813079

#### Parts Included:

Wire connectors



Mounting plate + Fixture Frame  
with LED's

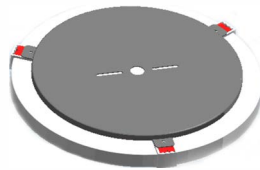

Mounting Screws




Glass  
(Opal w/ Silver or Gold Edge)



#### CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:


- ☐ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
- ☐ Consult a qualified electrician if you have any electrical questions or need to replace the driver.



#### Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

## Mounting Instructions

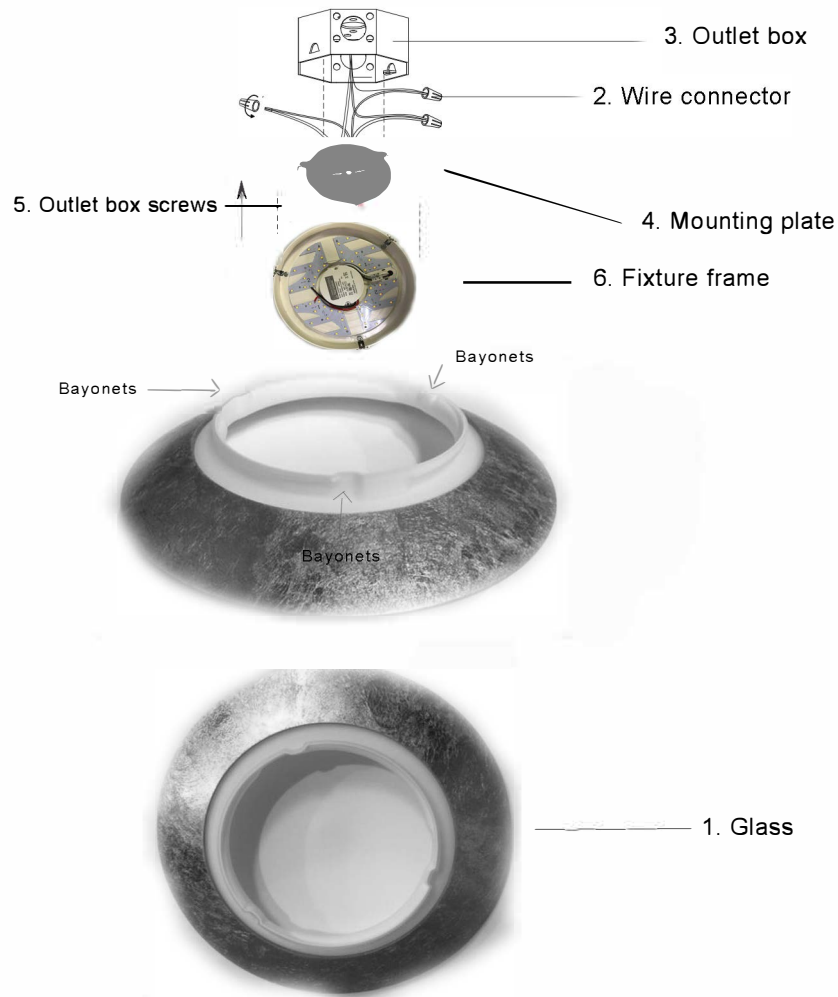

## ASSEMBLY INSTRUCTIONS

# VANCOUVER

### 656813079

## Assembly Instructions

1. Turn off the electrical power to the outlet at circuit breaker in the electrical panel.
2. Unscrew the mounting bracket (#4) from the fixture frame (#6) by unscrewing the hex nuts and removing washers.
3. Mount the mounting bracket to the outlet box (#3), using the outlet box screws (#5).
4. Connect the ground wire from the fixture frame (#6) to the ground wire from the Outlet Box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#3). Connect the grey/black wire from the fixture to the grey/black wire (live wire) of the Outlet Box (#3). Cover all connections using the Wire Connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the Outlet Box. Note: If you have electrical questions, consult your local licensed electrician.
5. Screw fixture base back (#6) onto mounting bracket (#4), and placing washers and hex nuts back into place.
6. Align the glass bayonets (#1) over the fixture base's bayonets/pins (#6). Put the glass into the frame, and turn the glass clockwise until the glass is tight and secure.
7. Installation in complete. Turn on the power at the circuit breaker or the fuse box. Turn the light switch on to activate the fixture.