
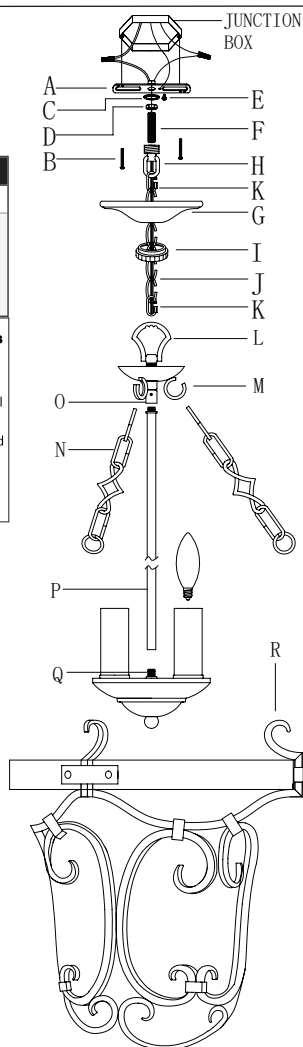


# Assembly Instructions: 1821-3P

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

**For Customer Service, please  
contact the place of purchase.**

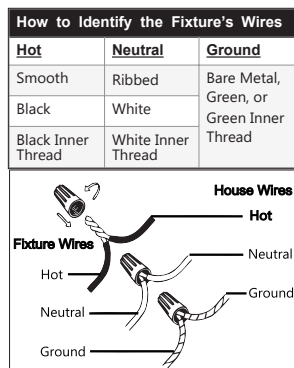

## PREPARING FOR INSTALLATION

Carefully remove the new fixture from the carton as well as the yellow bag that holds all of the parts. See the important notes above. Shut off power at the circuit breaker and remove old fixture from wall, including the old mounting strap.

1. Take the mounting strap (A) assembly from the parts bag. One end of nipple (F) should be attached to mounting strap (A) with a washer and hex nut (D) in place. The other end should have canopy loop (H) attached.
2. Use a screwdriver and mounting screws (B) to attach mounting strap (A) to the junction box. About half of the exterior threads of nipple (F) should be exposed, allowing canopy loop (H) to fit snugly onto nipple (C). Test to ensure that with canopy (G) in place, canopy loop (H) fits onto nipple (F).
3. Remove the canopy and set aside for later. Pull the house wires through the center of mounting strap (A).

## ASSEMBLING THE FIXTURE

4. Measure to determine the desired hanging height of the fixture. If necessary, remove excess chain using chain pliers. To lengthen the fixture, add additional chain. If additional chain is needed, contact the place of purchase to order.
5. Feed fixture wires from nipple (Q) into rods (P) and out the other end. Pull wires until taut. Thread rods (P) together and onto nipple (Q). Feed fixture wires into rods (P) into swivel (O) and out through the top loop (L).
6. Attach chain connectors (K) to each end of the chain (J). Attach one end of the chain with chain connector (K) to the canopy loop (H) and attach the remaining end of the chain with chain connector to the top loop (L). Close the chain connectors to secure.
7. Feed the fixture wires through the top loop (L) up the chain (every three links or so). Feed fixture wires through the canopy loop (H), canopy loop collar (I), and canopy (G). Trim the wires after adding at least 8 to 10 inches of wire to the desired length. Slide the canopy, and canopy loop collar down the chain.
8. Attach the ends of the decorative chains (N) to hooks (M) located at the bottom of the top loop (L) and hook (R) found on the top of the fixture.

## CONNECTING THE WIRES

9. Have an assistant support the weight of the fixture while completing the wiring. Attach the fixture's wires to the house wires which were pulled earlier from the junction box through the mounting strap (A). Connect black to black (transparent wire with black inner thread or smooth); white to white (transparent wire with white inner thread or ribbed); ground to ground (green, transparent wire with green inner thread, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) coming from the junction box, locate ground screw (E) on the mounting strap and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

## FINISHING THE INSTALLATION

10. Push the canopy (G) up against the mounting strap (A) so that the threads of nipple (F) protrude out from the center of the canopy (G). Secure the canopy (G) by threading on canopy loop collar (I) and canopy loop (H) over nipple (F). Thread until snug against the canopy (D).

Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.