


Assembly Instructions: 3171-LP

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase to arrange for replacement parts.

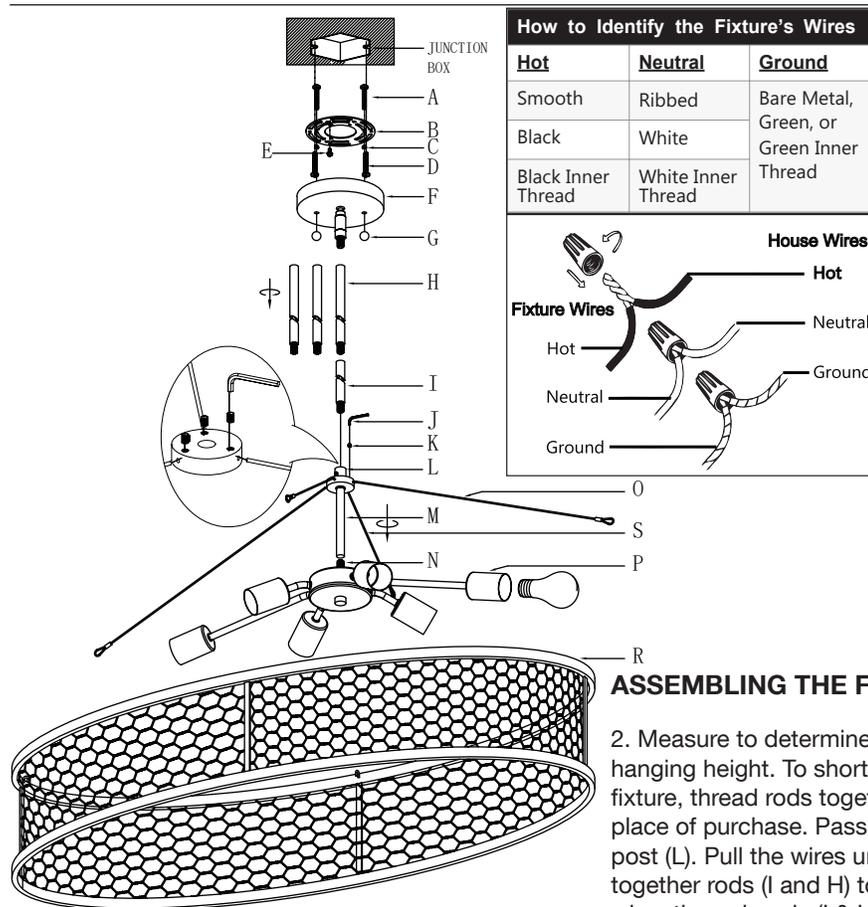

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner
Black	White	Thread
Black Inner Thread	White Inner Thread	

House Wires

Fixture Wires

Hot

Neutral

Ground

PREPARING FOR INSTALLATION

Carefully remove the new fixture from the carton as well as the yellow bag that holds all of the parts. See the important notes above. Shut off power at the circuit breaker and remove old fixture including the old mounting strap.

1. Mounting strap (B) contains several pairs of threaded holes. Find the pair of holes that matches the spacing of the holes on the junction box and the canopy. Two sets of mounting screws (A & D) should be attached to mounting strap (B). You may need to tighten nuts (C) which hold these screws in place. Pull the house wires through the center of mounting strap (B). Place mounting strap (B) over the junction box so that mounting screws (A) are vertical, and in alignment with the hole locations on canopy (F). Secure mounting screws (A) to mounting strap (B) with nuts (C). Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

ASSEMBLING THE FIXTURE

2. Measure to determine the correct number of rods needed for proper hanging height. To shorten the fixture, slide excess rods off. To lengthen the fixture, thread rods together. If additional rods are needed, please contact the place of purchase. Pass the fixture wires from nipple (N) through rod (M) and post (L). Pull the wires until taut and secure rod (M) onto nipple (N). Thread together rods (I and H) to achieve the desired hanging height. Feed the fixture wires through rods (I & H), swivel, and canopy (F). Pull the wires until taut. Thread to secure the rods (I & H) to the swivel found at the bottom of canopy (F). Trim the wires to the desired length plus 8 to 10 inches. Take the allen key tool (J) provided and slightly loosen screws (K) found near post (L). Insert cables (O & S) into the open slots and secure by tightening screws (K) with allen key tool (J). Refer to the diagram shown beside post (L).

CONNECTING THE WIRES

3. Have an assistant support the fixture's weight while completing the wiring. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot (transparent wire with black inner thread, black, or smooth wire) Neutral to Neutral (transparent wire with white inner thread, white, or ribbed wire), and Ground to Ground (transparent wire with green inner thread, green wire, or copper). Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

4. Place canopy (F) over mounting screws (A) so that the screws protrude through the holes in the canopy. Thread deco nuts (G) onto the exposed threads of mounting screws (A). Twist until the canopy is snug against the ceiling. Install light bulbs (not provided) into sockets (P) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage. Slide the shade up over the fixture's sockets and bulbs and align the loops found at the ends of cable (O & S) with hooks (R) found on the top of the shade. Attach the loop to hooks (R) to secure the shade to the fixture.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

