

# INSTALLATION INSTRUCTIONS

Item#N5363-XXX (New. 06/06/2024)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Thread rod and canopy assembly (E) onto all thread (F) on top of fixture body.
4. Position mounting plate (A) on ceiling and mark location of the three drywall anchors (G). Pre-drill holes for drywall anchors (G). Then insert drywall anchors (G) into ceiling.
5. Attach mounting plate (A) to outlet box (Not included) with mounting screws (B) (Size: #8-32N\*L0.5") and wood screws (H) into drywall anchors (G). The side of the mounting plate marked "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
7. Tuck wire connectors neatly into outlet box.

### COMPLETING THE INSTALLATION (Fig. 1)

8. Place canopy (D) over mounting plate (A) and secure with screws (C).
9. Install (12) twelve candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Twist large glass shade (K1) and small glass shade (K2) to socket (I) until snug. Do not over tighten. Note: Install small glass shade (K2) to the longest tube which labeled "Glass shade (K2)".

Your installation is now complete. Return power to outlet box and test the fixture.


**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

The fixture is over 10lbs, please remove all glasses before removing canopy from mounting plate to inspect wire connections in the fixture. This will allow you to hold the fixture body during wire connection or inspection or fixture removal.


**Fig. 1**

Set#A-021-194D

- Mounting Plate
- Ground Screw
- Mounting Screw \*2

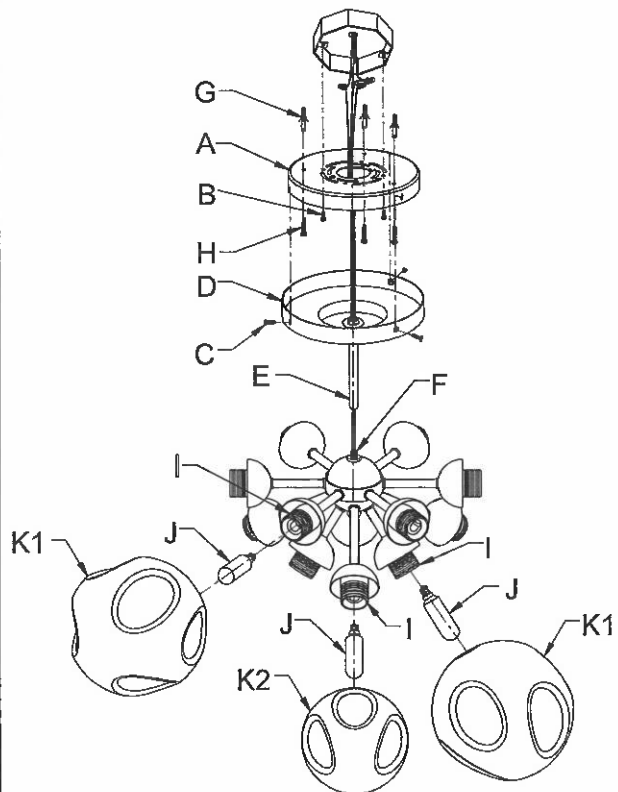

**Fig. 2**

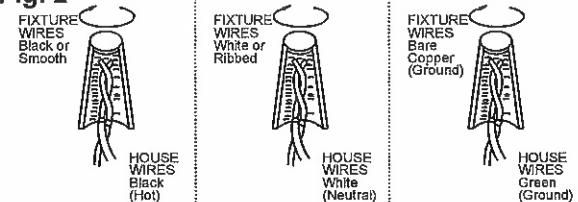

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

