
### **ASSEMBLY INSTRUCTIONS**







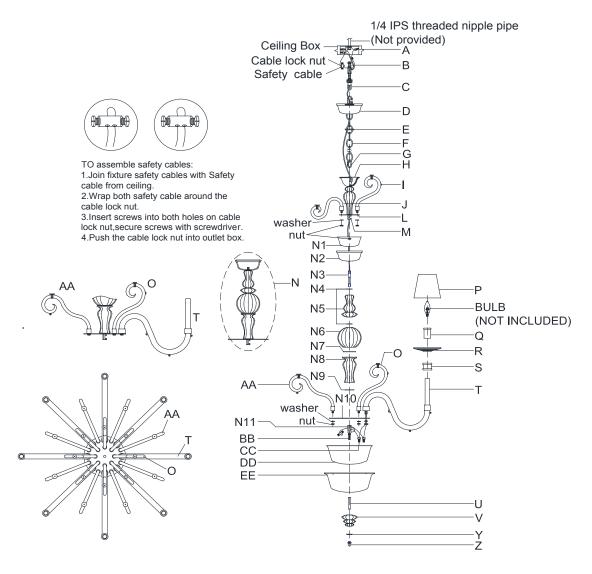

# **Alexandra Large Chandelier**

Item # RL 5262

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- 1. Carefully remove all parts from the box.
- 2. A 1/4" threaded nipple must be installed in your outlet box. Then install the threaded nipple (B) into the outlet box.
- Unscrew the threaded collar on the chain end link (G) and attach it to the top ring (H).
  Close the threaded collar to secure the fixture body.
- 4. Let canopy (D) and lock collar (E) go through the chain (F).
- 5. With the fixture dimension as a guide, shorten the chain (F) as needed using a pair of chain pliers.
- Unscrew the threaded collar on the other chain end link, raise the fixture then attach chain end link to the ceiling loop (C). Close the threaded collar to secure.
- Gently set the arm (I & J) to the center plate (L) and secure with the spring washer and lock nut.
- 8. Unscrew the lock nut and hickey (N11) on the component (N), make them separated.
- Thread the tube (N3) to the hickey (M),then let the metal bowl (N1),crystal bowl (N2), plastic washer (N4),crystal (N5),plastic washer (N4),crystal (N6),plastic washer (N7), crystal (N8),plastic washer (N9),center plate (N10) pass through the tube (N3) and secure with hickey (N11).
- Gently set the arm (AA & O) to the center plate (N10) and secure with the spring washer and lock nut.
- 11. Gently set the wire arm (T) to the center plate (N10) and secure using the spring washer and lock nut. Check that the arms are spaced evenly before final tightening.
- 12. Connect the hot wire (smooth edge,markings) from the arms to the main wire (smooth edge,markings) from the center plate (N10) using wire nut (CC).



#### **ASSEMBLY INSTRUCTIONS**

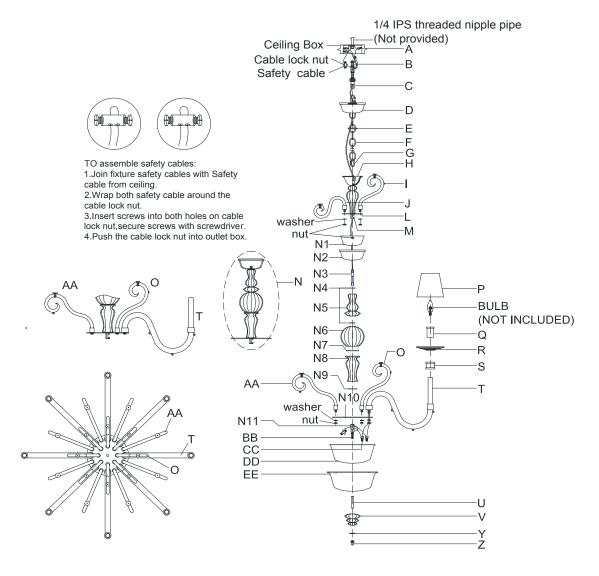







## **Alexandra Large Chandelier**

Item # RL 5262

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Connect the neutral wire (ribbed, no markings) from the arms to the main wire (ribbed, no markings) from the center plate (N10) using wire nut (CC).
- 14. Wrap all connections individually with electrical tape.
- 15. Thread the thread pipe (BB) to the hickey (N11).
- 16. Thread the tube (U) to the thread pipe (BB).
- 17. Let the metal bowl (DD),crystal bowl (EE),crystal (V),metal washer (Y) go through the tube (U) and secure with finia (Z).
- 18. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (F).
- 19. When you reach the canopy and ceiling loop, measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
- 20. Strip the insulation back on the two power supply wires about 5/8".
- 21. Twist the power supply and ground wire together and push through the center hole of the ceiling loop (C).
- 22. Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A) .If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
  - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 23. Connect the fixture Neutral (ribbed,no markings) wire with the neutral wire from the outlet box using wire nut (A).
- 24. Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet box using wire nut (A).
  - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.



#### **ASSEMBLY INSTRUCTIONS**

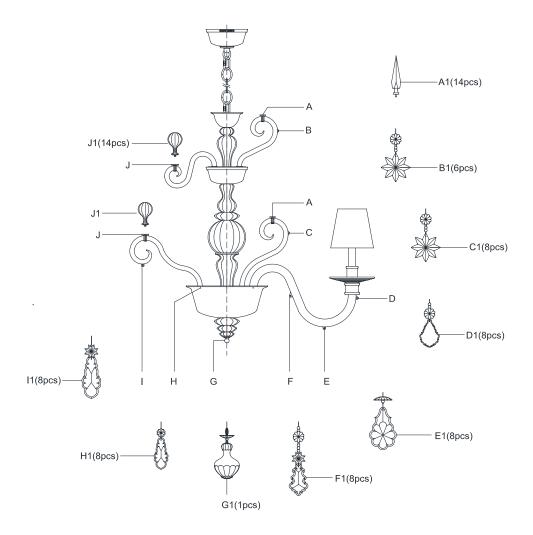



Item # RL 5262

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- 25. Tuck these wire connections neatly into the outlet box to secure.
- 26. Put canopy (D) to the ceiling loop (C) and secure with lock collar (E).
- 27. Attach the crystal (S & R & Q) to the top of arm (T).
- 28. Thread the crystal column (A1) to the check ring (A).
- 29. Hang the crystal drop (B1) to the hook (B).
- 30. Hang the crystal drop (C1) to the hook (C).
- 31. Hang the crystal drop (D1) to the hook (D).
- 32. Hang the crystal drop (E1) to the hook (E).
- 33. Hang the crystal drop (F1) to the hook (F).
- 34. Hang the crystal drop (G1) to the finial hook (G).
- 35. Hang the crystal drop (H1) to the bowl holes (H).
- 36. Hang the crystal drop (I1) to the hook (I).
- 37. Thread the glass ball (J1) to the check ring (J). Attention: All the glass balls (J1) are marked with numbers, they must be installed to the arms (J & AA) which also marked with the same numbers.
- 38. Insert bulbs (not included) into the sockets.
- 39. Clip the shade (P) onto the bulbs.
- 40. Installation is complete, turn on power at fuse or circuit breaker.









<sup>\*\*\*</sup>Clean with a dry ,soft cloth only. Use no harsh abrasives or chemical agents.