



| | | |
|----------------|--|--------------|
| LOCATION | | DATE |
| PREPARED BY | | QUANTITY |
| COMMENTS | | FIXTURE TYPE |
| CATALOG NUMBER | | |

Spring Low Profile Wrap SPRL LED Series

Features

This low profile, clean appearance, surface mounted wrap provides high light output with a clear prismatic lens. It can be used in various commercial and residential applications. Fixture mounts to a standard junction box (not included).



Construction

Housing is made from 22-gauge stamped steel and painted in lighting grade white. One of the end cap is designed to pivot with spring tension for ease of servicing the diffuser. Diffuser is supported by end caps. Power supply connections must be made inside a junction box (not included).



Finish

White

Diffuser

Acrylic diffuser is .060" thick prismatic diamond pattern.

Electrical


Input 120-277 VAC/60 HZ
Not compatible with dimmers.

LED

Integrated LED modules capable of producing:
2 ft. - 26W = 2400 source lumens
4 ft. - 40W = 3600 source lumens
4 ft. - 55W = 7300 source lumens
4000K (CCT), Rated for 50,000 Hrs., 80 CRI.

Certification

cETLus listed for indoor damp locations
ENERGY STAR® qualified

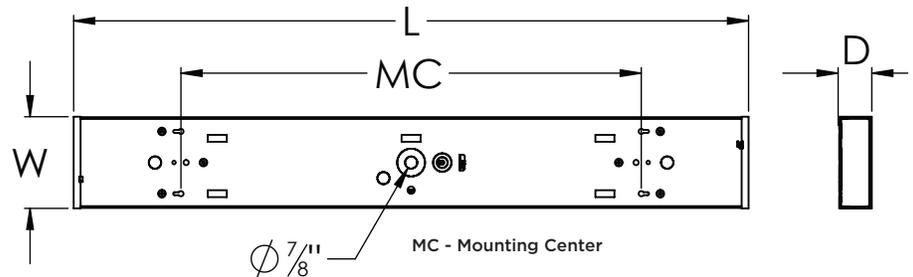

Option for SPRL074873L40MV ONLY*

Emergency Battery Back-Up (add -BB to the end of the model number)

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

Ordering Information:

| Cool White | LED | Source Lumens | CCT | L | W | D | MC |
|------------------|-----|---------------|-------|-----|--------|--------|----------|
| SPRL052424L40MV | 26W | 2400 | 4000K | 24" | 5-3/8" | 2-3/8" | 12-3/16" |
| SPRL054836L40MV | 40W | 3600 | 4000K | 48" | 5-3/8" | 2-3/8" | 36-3/16" |
| SPRL074873L40MV* | 55W | 7300 | 4000K | 48" | 6-1/2" | 3" | 36-3/16" |