



FN 15[®]

TAC3, TAC3 DUTY & DMR3

**AUTOLOADING RIFLE
OWNER'S MANUAL**

Important operating instructions for:

FN 15® TAC3, TAC3 DUTY AND DMR3

If you have any questions or comments regarding your new firearm, please contact us.

FN Service Center
797 Old Clemson Rd
Columbia, SC 29229

(800) 635-1321
customerservice@fnamerica.com
www.fnamerica.com

Please use the space below to record information about your new firearm.

Model _____

Serial Number _____

Purchased From _____

Date of Purchase _____

CONTENTS PAGE

1.0	FOREWARD	2
2.0	BASIC SAFETY RULES	3
3.0	DESCRIPTION	10
4.0	SERIAL NUMBER	12
5.0	NOMENCLATURE	13
6.0	INITIAL CLEANING	14
7.0	OPERATION	14
8.0	AMMUNITION	19
9.0	LOADING AND UNLOADING	20
10.0	BUTTSTOCK ADJUSTMENT	22
11.0	INSTALLING ACCESSORIES	23
12.0	AMBIDEXTROUS SAFETY SELECTOR	24
13.0	FIRING	27
14.0	TROUBLESHOOTING PROCEDURES	28
15.0	DISASSEMBLY	35
16.0	ASSEMBLY	43
17.0	INSPECTION, CLEANING AND LUBRICATION	50
18.0	SERVICE POLICY	51
19.0	WARRANTY, SERVICE AND TECHNICAL QUESTIONS	62
20.0	CHARACTERISTICS, CAPABILITIES AND FEATURES	63

1.0 FOREWARD



ALWAYS KEEP THIS MANUAL WITH YOUR FIREARM. INCLUDE IT WITH THE FIREARM WHEN IT CHANGES OWNERSHIP OR WHEN IT IS LOANED OR PRESENTED TO ANOTHER PERSON.

***NOTICE!* THE MANUFACTURER AND/OR ITS LOCAL OFFICIAL DISTRIBUTORS ASSUME NO RESPONSIBILITY FOR PRODUCT MALFUNCTIONS OR PHYSICAL INJURY OR PROPERTY DAMAGE IN WHOLE OR IN PART FROM THE CRIMINAL OR NEGLIGENT USE OF THE PRODUCT, IMPROPER OR CARELESS HANDLING, RELOADED, HAND-LOADED OR REMANUFACTURED AMMUNITION, CUSTOMER ABUSE OR NEGLECT OF THE PRODUCT, OR OTHER INFLUENCES BEYOND THE MANUFACTURER'S DIRECT AND IMMEDIATE CONTROL.**

ALL FIREARMS HAVE LETHAL POTENTIAL. READ THE BASIC SAFETY RULES CAREFULLY AND UNDERSTAND THEM FULLY BEFORE HANDLING THIS FIREARM.

In addition to the basic safety rules there are other safety rules pertaining to the loading, unloading, disassembly, assembly and use of this firearm located throughout this manual.

READ THE ENTIRE MANUAL CAREFULLY BEFORE USING THIS FIREARM. MAKE SURE THAT ANY PERSON USING OR WHO HAS ACCESS TO THIS FIREARM READS AND UNDERSTANDS ALL OF THIS MANUAL BEFORE USE OR ACCESS.

IT IS YOUR RESPONSIBILITY TO KNOW AND ABIDE BY FEDERAL, STATE AND LOCAL LAWS GOVERNING THE SALE, TRANSPORTATION AND USE OF FIREARMS IN YOUR AREA. CALIFORNIA STATE WARNING, SAFETY AND WARRANTY NOTES ACCORDING TO STATE LAW, CALIFORNIA REQUIRES THAT FIREARMS

⚠ WARNING

“Children are attracted to and can operate firearms that can cause severe injuries or death. Prevent child access by always keeping guns locked away and unloaded when not in use. If you keep a loaded firearm where a child obtains and improperly uses it, you may be fined or sent to prison.”

⚠ ADVERTENCIA

“A los niños los atraen las armas de fuego y las pueden hacer funcionar. Ellos pueden causarse lesiones graves y la muerte. Evite que los niños tengan acceso a las armas de fuego guardándolas siempre con llave y descargadas cuando no las esté utilizando. Si usted tiene un arma de fuego cargada en un lugar en que un niño tiene acceso a ella y la usa indebidamente, le pueden dar una multa o enviarlo a la cárcel.”

MANUFACTURERS, DISTRIBUTORS AND RETAILERS INCLUDE CONSPICUOUS, SPECIFIC WARNINGS WITH FIREARMS SOLD IN THAT STATE.

2. BASIC SAFETY RULES

READ THIS MANUAL BEFORE HANDLING YOUR FIREARM.

⚠ WARNING

FIREARMS CAN BE DANGEROUS AND CAN POTENTIALLY CAUSE SERIOUS INJURY, DAMAGE TO PROPERTY OR DEATH, IF HANDLED IMPROPERLY. THE FOLLOWING SAFETY RULES ARE IMPORTANT REMINDERS THAT AS A FIREARMS OWNER SAFETY IS YOUR RESPONSIBILITY. THERE IS NO EXCUSE FOR CARELESS OR ABUSIVE HANDLING OF ANY FIREARM. HANDLE THIS FIREARM AND ALL OTHER FIREARMS WITH RESPECT FOR THEIR POWER AND POTENTIAL DANGER AT ALL TIMES.

- 1. ALWAYS KEEP THE MUZZLE OF YOUR FIREARM POINTED IN A SAFE DIRECTION, EVEN IF YOU ARE CERTAIN IT IS UNLOADED.**

Never point any firearm at anything you do not intend to shoot even if you are

certain it is unloaded. Stay alert and be aware of all persons and property within the range of your ammunition.

2. NEVER RELY TOTALLY ON YOUR FIREARM'S MECHANICAL "SAFETY" DEVICES. LIKE ANY MECHANICAL DEVICE, A "SAFETY" CAN SOMETIMES FAIL; IT CAN BE JARRED OR INADVERTENTLY MANIPULATED INTO AN UNSAFE CONDITION.

Remember, safe gun handling does not stop with your firearm's mechanical "safety" devices, it starts there. Always treat this firearm with the respect due a loaded, ready-to-fire firearm. The word "safety" describes a firearm's trigger block mechanism, sear block mechanism, hammer block mechanism or striker block mechanism. Mechanical "safeties" are designed to place your firearm in a safer status, and no guarantee can be made that the firearm will not fire even if the "safety" is in the on safe position. Mechanical "safeties" merely aid safe gun handling and are no excuse for pointing your firearm's muzzle in an unsafe direction. Some firearms do not have a mechanical safety. Many target firearms, lever-action firearms and pistols do not have manual "safety" mechanisms. Therefore, it is critical to read and understand the owner's or operator's manual for every firearm that you use, which explains the safe operation of the firearm. While it is a good idea to "test" your firearm's mechanical "safety" periodically for proper function, never test the "safety" while your firearm is loaded or pointed in an unsafe direction. See Section 7 for instructions on the operation of this firearm's "safety" mechanisms.

3. KEEP YOUR FINGERS AWAY FROM THE TRIGGER AT ALL TIMES UNTIL SHOOTING IS IMMINENT.

4. KEEP ALL FIREARMS UNLOADED DURING TRANSPORT, EVEN WHEN STORED IN A GUN CASE, SCABBARD OR OTHER CONTAINER.

For law enforcement, military personnel and authorized individuals, refer to the procedures of your organization or to the state and local laws and guidelines on carrying a loaded firearm.

5. BE SURE OF YOUR TARGET AND BACKSTOP.

Clearly identify your target and what is beyond. Know the range of your

ammunition and where the bullet will land if the target is missed or the bullet penetrates the target. Special care must be taken when shooting in low light conditions which make target identification and backstop conditions harder to assess. Never shoot at water or hard objects. Shooting at the surface of water or at rock or other hard surfaces increases the chance of ricochets or fragmentation of the bullet which can result in the bullet striking an unintended target.

6. WHENEVER YOU HANDLE ANY FIREARM, OR HAND IT TO SOMEONE, ALWAYS OPEN THE ACTION IMMEDIATELY AND VISUALLY CHECK THE FIREARM'S CHAMBER AND MAGAZINE TO MAKE CERTAIN THAT THE FIREARM IS COMPLETELY UNLOADED.

Completely unload your firearm as described in Section 8. Make certain the firearm does not inadvertently contain any ammunition. Remember, merely removing the magazine does not mean the chamber is unloaded. Always keep the chamber empty and your fingers away from the trigger unless shooting is imminent.

7. STORE YOUR FIREARM AND AMMUNITION SEPARATELY, WELL BEYOND THE REACH OF CHILDREN.

Store all firearms in secure, locked cases or a gun safe and store ammunition separately from your firearms. Keep your firearm unloaded when not in use. Take prudent safeguards to ensure your firearm does not become available to children, untrained, inexperienced or unauthorized people. At all times, comply with local and state laws concerning the possession and storage of firearms.

8. USE ONLY THE PROPER AMMUNITION FOR YOUR FIREARM.

Use only factory-loaded, new ammunition manufactured to SAAMI or CIP specifications. Be certain that each round you use is of the proper caliber or gauge and type for the particular firearm. The caliber of the FN 15® is located on the rear of the barrel or marked on the lower receiver. The use of reloaded or remanufactured ammunition can increase the likelihood of case head ruptures or other defects in the ammunition that can cause damage to your

firearm and injury to yourself or others nearby.

9. PROPERLY MAINTAIN YOUR FIREARM, PRACTICE PERIODIC MAINTENANCE AND AVOID UNAUTHORIZED SERVICING.

Store and carry your firearm so debris does not accumulate in the working parts. Clean and oil your firearm following the instructions provided in this manual after each use to prevent corrosion damage or accumulation of debris. Make sure that no obstructions remain in the barrel. Firing with an obstruction in the barrel can cause extensive damage to your firearm and serious injury to yourself and others.

DO NOT, UNDER ANY CIRCUMSTANCES, ALTER THE TRIGGER, SAFETY OR OTHER PARTS OF THE FIRING MECHANISM OF THIS OR ANY OTHER FIREARM. FAILURE TO OBEY THIS WARNING MAY RESULT IN INJURY OR DEATH TO YOURSELF OR OTHERS.

Your firearm is a mechanical device and as such, is subject to wear and requires periodic inspection and service. FN firearms should be serviced by the FN Product Service Center or FN authorized individual. FN cannot assume any responsibility for injuries suffered or damage caused by unauthorized servicing, alterations or modifications of FN firearms.

10. ALWAYS WEAR EYE AND HEARING PROTECTION WHEN SHOOTING.

Unprotected, repeated exposure to gunfire can cause hearing damage. Wear hearing protection (shooting earplugs or ear muffs) to guard against such damage.

Wear shooting glasses to protect your eyes from flying particles. Allow proper distance (also known as eye relief) between a scope and your eye when firing a scoped rifle or shotgun. Do not use unorthodox shooting methods that could cause the rearward travel of the slide or bolt of a firearm to contact your eyes, face or hands. Always keep a safe distance between the muzzle and ejection port of your firearm and any persons nearby, as muzzle blast, debris and ejecting shells could inflict serious injury. Always wear eye protection when disassembling and cleaning your firearm to prevent the possibility of springs, spring-tensioned parts, solvents or other agents from contacting your eyes.

11. AVOID DROPPING FIREARMS OR SHOOTING FROM UNSTABLE POSITIONS.

Shooting from unstable positions is dangerous. Doing so increases the risk of falling or dropping the firearms. The following rules should always be observed. Always make certain that your firearm is unloaded when climbing or navigating obstacles and ensure that the surface that you are firing the rifle from is safe and stable. Dropping a firearm from an elevated position increases the risk of damage or unintended discharge.

DROPPING OR JARRING A LOADED FIREARM CAN CAUSE AN UNINTENDED DISCHARGE. BE EXTREMELY CAREFUL DURING ANY SHOOTING ACTIVITY OR WHEN CARRYING A LOADED FIREARM TO AVOID DROPPING IT.

12. BE ALERT TO THE SIGNS OF AMMUNITION MALFUNCTION.

If when firing, a cartridge has a different sound or lighter recoil than normal, do not load another cartridge into the chamber. If your firearm fails to fire, keep the muzzle pointed in a safe direction for a minimum of 30 seconds.

Rotate the ejection area of the firearm away from you, carefully open the action and eject cartridge by pulling back on the charging handle.

If the primer is indented, the defective cartridge should be disposed of in a way that cannot cause harm. If the primer is not indented, your firearm should be examined by a qualified gunsmith and the cause of the malfunction corrected before further use. Inspect the barrel following the instructions in Section 17.

Beware of barrel obstructions, remove the bolt carrier assembly as detailed in Section 15 and inspect the barrel for obstructions before shooting. Mud, snow and an infinite variety of other objects may inadvertently lodge in a barrel bore. If an obstruction is seen, no matter how small it may be, clean the bore with a cleaning rod and patch as described in Section 16 of this manual. It only takes a small obstruction to cause dangerously increased pressures that can damage your firearm and cause serious injury or death to yourself and others.

13. MAKE SURE OF ADEQUATE VENTILATION IN THE AREA THAT YOU DISCHARGE A FIREARM.

Exposure to lead and other toxic chemicals can occur from discharging firearms in poorly ventilated areas, cleaning firearms or handling ammunition. Lead is a substance that has been known to cause birth defects, reproductive harm and other serious injury. Wash hands thoroughly after exposure to ammunition or after cleaning a firearm.

14. BE DEFENSIVE AND ON GUARD AGAINST UNSAFE GUN HANDLING AROUND YOU AND OTHERS.

Don't be timid when it comes to gun safety. If you observe other shooters violating any of these safety precautions, politely suggest safer handling practices.

15. BE CERTAIN YOUR FIREARM IS UNLOADED BEFORE CLEANING.

Because so many gun accidents occur when a firearm is being cleaned, special care should be taken to ensure your firearm is unloaded before disassembly, cleaning and reassembly. Keep ammunition away from the cleaning location. Never test the mechanical function of any firearm with live ammunition.

16. TEACH AND SUPERVISE FIREARMS SAFETY TO ALL MEMBERS OF YOUR HOUSEHOLD, ESPECIALLY TO CHILDREN AND NONSHOOTERS.

Closely supervise newcomers to the shooting sports. Encourage enrollment in firearm and shooting safety courses.

17. NEVER DRINK ALCOHOLIC BEVERAGES OR TAKE JUDGEMENT/REFLEX IMPAIRING MEDICATION OR DRUGS BEFORE OR DURING SHOOTING.

Your vision, motor skills and judgment could be dangerously impaired, making your gun handling unsafe to you and to others.

18. READ AND HEED ALL WARNINGS IN THIS OWNER'S MANUAL, ON AMMUNITION BOXES AND WITH ALL ACCESSORIES THAT YOU INSTALL ON YOUR FIREARM.

It is your responsibility to secure the most up-to-date information on the safe handling procedures for your FN firearm. FN assumes no liability for incidents which occur when unsafe or improper rifle accessories or ammunition combinations are used.


NOTICE! FN RESERVES THE RIGHT TO REFUSE SERVICING A FIREARM WHICH HAS BEEN MODIFIED BY REMOVAL OF METAL FROM THE BARREL OR SLIDE, MODIFICATIONS OF THE FIRING MECHANISM AND/OR OTHER PARTS, AND WILL, IN

SUCH A CASE, ALWAYS RECOMMEND RESTORING THE FIREARM TO ITS ORIGINAL SPECIFICATIONS. PARTS AND LABOR REQUIRED FOR SUCH A RESTORATION ARE PAYABLE BY THE OWNER OF THE FIREARM.



3.0 DESCRIPTION

The FN 15 is a direct gas impingement-operated, semi-automatic repeating firearm based on the proven design of the M16 series of firearms successfully used by the U.S. Military for decades. It will prove to be easy to use, very accurate and extremely reliable. This information applies to the basic operation of the FN 15 firearm, regardless of the specific model you may have purchased. Where there are differences, these differences are explained or are included in a separate addendum included with your FN 15.

FIGURE 1

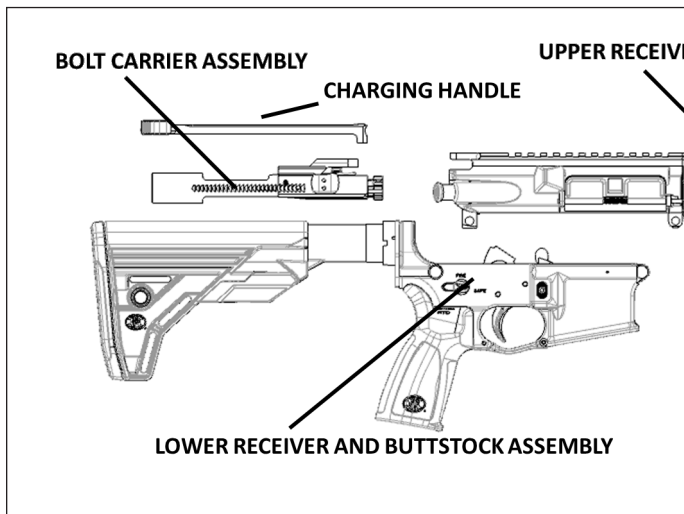

ER ASSEMBLY

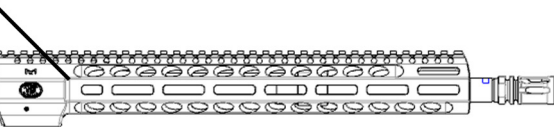

MAGAZINE

MAJOR COMPONENTS AND DESCRIPTION

Magazine - Consists of a polymer construction that holds cartridges for feeding and provides a guide to position cartridges for stripping. The magazine has a 30-round capacity.

Lower Receiver and Buttstock Assembly (serialized item) - Consists of a forged aluminum construction that contains the trigger assembly, safety lever, pistol grip, bolt catch/release, and magazine release. The lower receiver is equipped with a 6-position adjustable buttstock.

Bolt Carrier Assembly - Consists of the bolt assembly, bolt carrier with gas key, cam pin, firing pin retaining pin, and firing pin.


Upper Receiver Assembly - Consists of a forged aluminum construction that contains a MIL-STD 1913 picatinny top rail, forward assist, brass deflector, barrel assembly and free float handguard.

Charging Handle - The charging handle, when manipulated, results in the bolt carrier assembly being pulled to the rear and putting the hammer into the “cocked” position.

4.0 SERIAL NUMBER

The serial number is located on the left side of the lower receiver, on the outside of the magazine well. See Figure 2. Record the serial number at

FIGURE 2



Serial Number.


the front of this Owner's Manual and in another secure location for future reference.

5.0 NOMENCLATURE

In conventional firearm terminology, the position and movement of parts are described as they occur with the firearm horizontal and in normal firing position, i. e., the muzzle is forward or in front; the buttstock is rearward or to


GENERAL PARTS

FIGURE 3

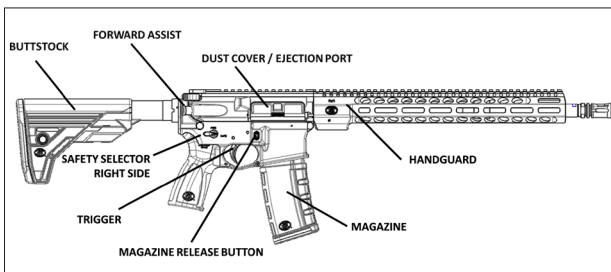

FN 15 right side.

FIGURE 4

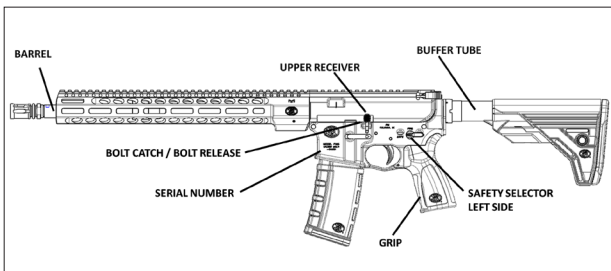

FN 15 left side.

the rear; the trigger is downward or underneath; the sights are upward or on top. For general parts nomenclature, refer to Figures below.

6.0 INITIAL CLEANING



WEAR EYE PROTECTION WHEN ASSEMBLING AND DISASSEMBLING YOUR FIREARM TO PREVENT SPRINGS, SPRING-LOADED PARTS, SOLVENTS AND OTHER AGENTS FROM CONTACTING YOUR EYES, RESULTING IN INJURY.

Various exposed metal parts of this firearm have been coated at the factory with a rust preventative compound. This compound is not an ideal lubricant. Before using the firearm, clean the anti-rust compound from the inside of the barrel, receiver, bolt carrier assembly and the action/chamber areas with CLP (cleaner, lubricant, protectant) as explained in Section 17.

If your firearm is to be stored, it is acceptable to leave the rust preventative compound on the firearm and keep it in its original packaging. Never fire the firearm upon purchase without cleaning it first. If the firearm contains hardened grease or other substances that you cannot remove, have the firearm checked by a gunsmith.

7.0 OPERATION

CYCLE OF OPERATION

Fully understanding cycle of operation for the FN 15 will greatly reduce downtime should the firearm not function properly.

- (1) FEEDING** begins as the bolt carrier group returns forward and the front of bolt contacts the magazine's next round. Once a round is pushed far enough forward, the case rim will clear the magazine feed lips and will move toward the chamber.
- (2) CHAMBERING** starts as the projectile's tip clears the barrel extension and enters the chamber.
- (3) LOCKING** occurs as the bolt carrier's continued forward momentum causes

the extractor to move over the case rim; the bolt cam pin rotates in the bolt carrier's cam pin slot, forcing the bolt locking lugs to rotate in the barrel extension.

- (4) **FIRING** begins by pulling the trigger. With firearm in "fire" mode, pulling the trigger will cause the disconnecter to disengage the trigger's front sear, allowing the hammer to fall. The hammer will strike the firing pin, which, in turn, strikes the primer's discharging powder. As the bullet passes the barrel's gas port, expanding gases travel through the gas port and into the gas tube. Gases impart energy onto the bolt carrier's gas key, initializing its movement to the rear. Movement of bolt carrier starts next phase.
- (5) **UNLOCKING** occurs as the bolt carrier moves rearward. The bolt cam pin starts to rotate in the cam slot on top of bolt carrier, turning the bolt until locking lugs are clear to move to rear, free of barrel extension.
- (6) **EXTRACTING** occurs when the bolt carrier pulls the bolt rearward and the extractor pulls the case from chamber.
- (7) **EJECTING** occurs when the front of the case clears the front edge of the ejection port while the ejector pushes on the left side of case head. This action and continued movement of bolt carrier to rear causes the casing to strike the brass deflector and then clear firearm.
- (8) **COCKING** occurs when the bolt carrier moves to the rear far enough to contact the hammer and push it down and to the rear until fully compressed. As the bolt carrier moves all the way to the rear, the buffer spring is fully compressed. This action forces the bolt carrier forward. Cocking starts while ejection is occurring. The rearward motion of the bolt carrier pushes the hammer in the cocked position. As the trigger is held to the rear, the hammer is immediately engaged by the disconnecter and remains in the cocked position. When the trigger is released, the disconnecter releases the rear tooth of the hammer and immediately engages the front trigger's front sear. Pulling the trigger again releases the hammer from the trigger's front sear and allows hammer to strike the firing pin.

The cycle of operation is continuous until (1) stopped by the user, (2) the magazine is empty, or (3) the user incurs a stoppage or malfunction at which time the user should begin troubleshooting procedures.

OPERATION OF THE SAFETY SELECTOR LEVER



ALWAYS KEEP THE SAFETY SELECTOR LEVER IN THE “SAFE” POSITION UNLESS SHOOTING IS IMMINENT. ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION AND YOUR FINGER OFF THE TRIGGER.


The FN 15 TAC3 firearm utilizes an ambidextrous Safety Selector Lever located on both sides of the lower receiver, just above and behind the trigger. This location allows the selector lever to be easily manipulated with the thumb of the right hand, or the index finger of the left hand. The Safety Selector Lever has two positions: SAFE and FIRE.

SAFETY SELECTOR LEVER POSITIONS

SAFE - When the selector lever is in the “SAFE” position, the firearm is in a safe condition; rearward movement of the trigger is completely blocked. Safe position should be set when a cocked rifle is not operational or when it should be loaded or transported without any risk. In this position, the trigger’s rear lug is in contact with selector cam’s solid portion, which locks the trigger and prevents firing.


FIRE - When the selector lever is in the “FIRE” position, the trigger can

FIGURE 5

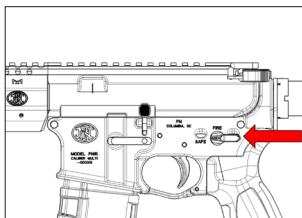

Selector - SAFE position.

FIGURE 6

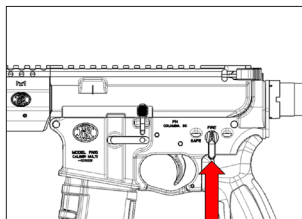

Selector - FIRE position.

be pulled to fire rifle if ammunition has been loaded into the chamber. In this position, the trigger's rear lug is aligned with the selector cam's undercut, allowing the trigger to move each time the operator pulls it. As a result, the rifle will fire one shot each time the trigger is pulled.

OPERATION OF THE BOLT RELEASE AND BOLT LOCK

WARNING

WHEN USING THE BOLT RELEASE, ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION AND KEEP YOUR FINGER OFF THE TRIGGER. UNLESS SHOOTING IS IMMINENT, ALWAYS REMOVE THE MAGAZINE FROM THE FIREARM BEFORE CLOSING THE BOLT TO PREVENT INADVERTENTLY LOADING A CARTRIDGE FROM THE MAGAZINE INTO THE CHAMBER.

WARNING


MAKE SURE YOUR FINGERS ARE SAFELY AWAY FROM THE EJECTION PORT AT ALL TIMES WHEN THE BOLT IS LOCKED OPEN AND WHEN THE BOLT IS RELEASED TO AVOID PINCHING THEM WHEN THE BOLT CLOSSES.

The bolt release is located on the left side of the lower receiver, just above and in front of the trigger. It automatically engages after the last cartridge in the magazine has been fired and locks the bolt to the rear most, open position.

To release the bolt, press inward on the top of the bolt release paddle. This will allow the bolt to return to the forward position.

The bolt release can also be activated using the charging handle by pulling the charging handle all the way to the rear, which will disengage the bolt release. Depending on the condition of the firearm, the charging handle can be released, allowing the recoil spring force to close the

FIGURE 7

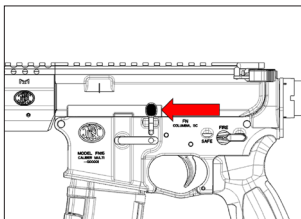

Bolt Release.

bolt; or, while maintaining control of the charging handle, the bolt carrier can be slowly closed. When using the controlled closing method, ensure the bolt goes completely into battery and the charging handle latches.

The bolt release can also be used to lock the bolt carrier in the rearward position. To lock the bolt in the open or rearward position, activate the charging handle latch and pull the charging handle all the way to the rear with the right hand and press inward on the bottom portion of the bolt release with the left hand. Once the bolt carrier is held to the rear by the bolt release, push the charging handle forward, back into the upper receiver, leaving the bolt locked open.


LOAD MAGAZINE ASSEMBLY

Magazine Description - The standard magazine is 30-round capacity and may be loaded with any amount up to that capacity. The magazine follower has raised portions generally resembling the outline of a cartridge. Cartridges are loaded into the magazine with bullet tips pointing in the same direction as the follower's raised portion; ensure rear of cartridge is oriented to rear of magazine.

Loading the magazine with individual rounds.


STEP 1 Push cartridge straight down through feed lips and to rear

FIGURE 8

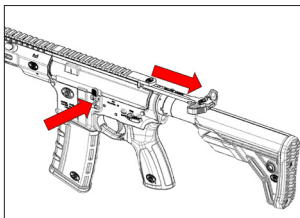

Locking the bolt to the rear.

FIGURE 9



Loading the magazine.

until seated.

STEP 2 Repeat until the desired number of rounds is loaded.

Do not exceed 30 rounds.

Loading the magazine with a 10-round stripper clip.

STEP 1 With stripper clip adapter in place, place 10-round stripper clip in position. Using thumb pressure on rear of top cartridge, press down firmly until all ten rounds are below magazine's feed lips.

STEP 2 Remove empty stripper clip while holding stripper clip adapter in place.

STEP 3 Repeat until three 10-round clips (30-round magazine) are loaded.

STEP 4 Remove stripper clip adapter and keep for future use.

NOTE! TO ENSURE THE BASE OF THE ROUNDS ARE PROPERLY SEATED TOWARDS THE REAR OF THE MAGAZINE, LIGHTLY TAP REAR END OF MAGAZINE BODY OVER THE PALM OF HAND.

8.0 AMMUNITION

FN specifically disclaims responsibility for any damage or injury occurring with, or as a result of, the use of faulty, non-standard, remanufactured, hand-loaded or reloaded ammunition, or cartridges other than those for which the firearm was originally chambered. Serious damage, injury or death could result from the use of incorrect ammunition, from firing against a bore obstruction or from propellant overloads. Use of improper ammunition, such as listed previously will void the manufacturer's warranty. Use only commercially manufactured ammunition made in accordance with SAAMI (Sporting Arms and Ammunition Manufacturers' Institute) or CIP (Commission internationale permanente pour l'épreuve des armes à feu portatives "Permanent International Commission for the Proof of Small Arms") standards. Be certain that the ammunition is the appropriate caliber and loading for the firearm and is clean, dry and in good condition. The caliber of your FN rifle is marked in a visible location.

CAUTION: CAREFULLY INSPECT EACH CARTRIDGE BEFORE IT IS LOADED IN THE

MAGAZINE. BE CERTAIN THE CARTRIDGE CASE IS NOT SPLIT OR DEFORMED AND THAT THE CARTRIDGES DO NOT POSSESS ANY OTHER DENTS OR DEFECTS.

For best results, use new factory manufactured ammunition from a reputable manufacturer. Primers, powder, cartridge cases and bullets can deteriorate with time and cause damage to the firearm or injury to the shooter or others. The FN 15 is chambered in 5.56X45mm NATO. Please use only ammunition which is the firearm is chambered for. If you have concerns about the compatibility of a particular ammunition type with your FN firearm, contact FN customer service.

CAUTION: STORE ALL CARTRIDGES OF DIFFERENT CALIBERS IN SEPARATE AND WELL-MARKED CONTAINERS. NEVER STORE CARTRIDGES OF MIXED CALIBERS IN A COMMON CONTAINER OR IN YOUR POCKETS.

9.0 LOADING AND UNLOADING OF THE FIREARM

LOADING THE FIREARM

The FN 15 can be loaded with the bolt locked open or closed.

LOADING THE FIREARM – BOLT OPEN

To load the firearm when the bolt carrier is locked to the rear (caused by firing the last round in the magazine or manually locking it to the rear).

1. Make sure the safety selector lever is in the "SAFE" position and the muzzle is pointed in a safe direction.
2. Insert a filled magazine into the magazine well until it locks in place.
3. Tap upward on magazine, then pull downward on magazine, to ensure magazine is properly seated and locked into position.
4. Release the bolt carrier by pressing the top of the bolt release or by pulling the charging handle all the way to the rear and releasing it.

LOADING THE FIREARM – BOLT CLOSED


To load the firearm when the bolt is closed.

1. Make sure the Safety Selector Lever is in the "SAFE" position and the muzzle is pointed in a safe direction.

2. Insert a filled magazine into the magazine well until it locks in place. Note, if the magazine is full to capacity it may be difficult to seat.
3. Tap upward on magazine, then pull downward on magazine, to ensure magazine is properly seated and locked into position.
4. Chamber a round by pulling the charging handle all the way to the rear and releasing it.

CAUTION: WHEN LOADING THE FIREARM DO NOT USE THE CHARGING HANDLE TO SLOW THE BOLT CARRIER. THIS COULD CAUSE A FEEDING ISSUE OR KEEP THE BOLT FROM GOING INTO BATTERY.

FIGURE 10

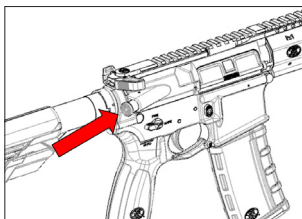

Forward assist.

If the bolt does not close completely, or to ensure that the bolt has closed completely, tap the forward assist button located on the right side of the upper receiver just behind the ejection port and brass deflector, with your right hand.

UNLOADING THE FIREARM

⚠ WARNING

TO BE CONSIDERED SAFE BEFORE DISASSEMBLY, CLEANING, INSPECTING, TRANSPORTING, OR STORING, FIREARM MUST BE UNLOADED AND CLEARED.

SAFETY CHECK


Carry out the following procedures to ensure the FN 15 can be manipulated, stored, and/or transported without any risk.

STEP 1 - Ensure Firearm is on "SAFE" and point Firearm in safe direction.

STEP 2 - Remove the magazine by depressing the magazine release.

STEP 3 - Lock the bolt carrier group to the rear by pulling the charging handle and depressing the bolt catch.

FIGURE 11

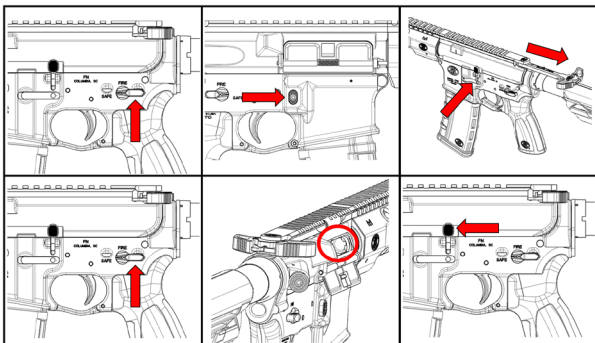

Unloading the FN15.

STEP 4 - Re-ensure Firearm is on "SAFE."

STEP 5 - Visually and physically inspect the chamber to ensure it is empty.

STEP 6 - Press bolt catch and watch bolt close on an empty chamber.

The FN 15 is equipped with a spring-loaded dust cover which can be closed over the ejection port when the firearm is not in use. The dust cover is useful for preventing debris from entering the action of the firearm when not in use. To close the dust cover, simply rotate it closed until it snaps into place.


10.0 BUTTSTOCK ADJUSTMENT

Collapsible Buttstock

The FN 15® carbine collapsible buttstock features a locking system that allows the length of pull to be adjusted as well as collapse for a more compact carry. It can be adjusted to six positions. To adjust the buttstock:

1. Make sure the Safety Selector Lever is in the “SAFE” position, the firearm is unloaded, and the muzzle is pointed in a safe direction.
2. Pull the buttstock latch down.
3. Move the buttstock back or forth to the desired length.
4. Release the latch and ensure the buttstock is securely locked into position.

FIGURE 12

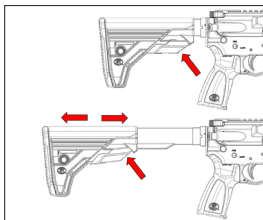

Adjusting FN stock.

11.0 INSTALLING ACCESSORIES


WARNING

BEFORE INSTALLING ANY ACCESSORIES, SIGHTS, LASERS OR OTHER DEVICES ON THE FIREARM, PLACE THE SELECTOR LEVEL IN THE “SAFE” POSITION, EJECT THE MAGAZINE, LOCK THE BOLT OPEN AND MAKE CERTAIN THE CHAMBER IS COMPLETELY UNLOADED. KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

WARNING - DO NOT MOUNT ANY SIGHT, LASER, OR OTHER DEVICE WHICH INTERFERES WITH NORMAL OPERATION OF THE CARBINE OR EXTENDS BEYOND OR IN FRONT OF THE MUZZLE. ENSURE ANY SIGHT OR DEVICE ATTACHED TO THIS RAIL SYSTEM IS FIRMLY MOUNTED.

M-LOK ACCESSORY INSTALLATION

FIGURE 13

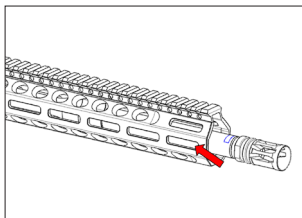

M-LOK Slot.


Refer to the manufacturer's installation instructions when attaching M-LOK accessories to your handguard.

12.0 AMBIDEXTROUS SAFETY SELECTOR

The FN 15 TAC3 firearm has a reversible Safety Selector. The selector levers can easily be removed and reversed without disassembling the lower receiver. The safety selector levers are secured to the selector shaft with a dovetail interface retained with a spring-loaded retention stud.

BEFORE ATTEMPTING TO REVERSE OR REPLACCE THE SAFETY SELECTOR LEVERS PLACE THE SAFETY LEVER IN THE "SAFE" POSITION, EJECT THE

FIGURE 14

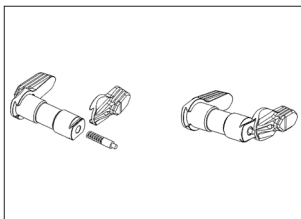

Selector Lever.

MAGAZINE, LOCK THE BOLT OPEN AND MAKE CERTAIN THE CHAMBER IS COMPLETELY UNLOADED. KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

CHANGING THE SAFETY SELECTOR LEVERS


Removal of the Safety Selector Lever

1. Ensure the firearm has been properly cleared and the selector in the safe position.
2. Rotate the selector to a position between SAFE and FIRE, this will ensure the selector lever does not hit the selector lever stops built into the side of the receiver. Using the tool provided or a small punch depress the end of the retention stud and slowly slide the lever over the retention stud, do not fully remove the lever.

⚠ WARNING

THE RETENTION STUD IS UNDER SPRING TENSION; UNINTENTIONAL RELEASE WILL RESULT IN FLYING PARTS AND POSSIBLE INJURY .

FIGURE 15

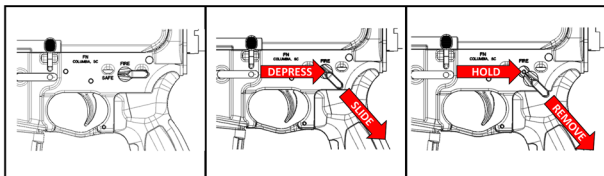

Remove selector lever.

3. Ease the lever towards the grip, maintaining tension on the retention stud with your thumb.
4. Slowly release the retention stud spring pressure and slide the lever completely off the selector shaft.


Installing the Safety Selector Lever

1. Ensure the selector has been rotated to a position between SAFE and FIRE.
2. Position the selector lever so the lever portion is pointing towards the grip. Using a small flat head screwdriver, or similar tool, depress the edge of the retention stud and slowly slide the lever over the edge of the retention stud.

⚠ WARNING

THE RETENTION STUD IS UNDER SPRING TENSION; UNINTENTIONAL RELEASE WILL RESULT IN FLYING PARTS AND POSSIBLE INJURY.

FIGURE 16

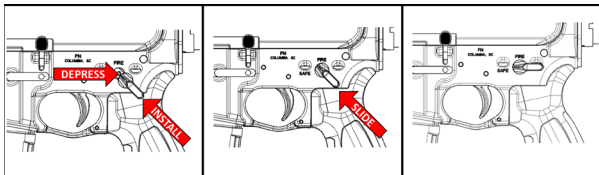

Install selector lever.

3. Depress the top end of the retention stud and ease the lever over stud.
4. Continue sliding selector lever until the retention stud goes into the hole in the lever, locking it into place.
5. Place the selector lever on safe.

13.0 FIRING



NEVER CHAMBER A CARTRIDGE OR MOVE THE SAFETY SELECTOR LEVER FROM THE "SAFE" POSITION UNLESS SHOOTING IS IMMINENT. ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

FIRING PROCEDURES

1. Load the magazine and firearm as described in 7.0.
2. When ready to fire, move the safety selector lever into the "FIRE" position, take aim and squeeze the trigger.
3. After a cartridge has been fired, the bolt carrier automatically moves rearward, ejecting the empty case, then return forward, chambering a cartridge from the magazine. Note: the charging handle does not move during the firing sequence.

Because fired casings are ejected to the right side, bystanders should not stand to the right of the shooter.

4. This operation is repeated each time you pull the trigger until the last cartridge from the magazine has been fired. If shooting is no longer imminent, immediately place the Safety Selector Lever in the "SAFE" position. See "Unloading" in 8.0 for more information.
5. After the last cartridge in the magazine is fired, the bolt will lock in the rearward position. If you wish to continue shooting, you can reload the firearm by removing the empty magazine, and loading the firearm as described above.

If your firearm is to be put away and stored, do not reload the firearm or magazine. The chamber and magazine must remain empty when storing your firearm.

 WARNING

DURING EXTENDED SHOOTING SESSIONS OR RAPID FIRING, THE BARREL AND FRONT SIGHT ASSEMBLY CAN BECOME EXTREMELY HOT. AVOID CONTACT WITH THESE PARTS DURING SHOOTING OR WEAR GLOVES TO PREVENT BURNING YOUR HANDS. DO NOT FIRE THE FN 15 WITHOUT THE HANDGUARDS IN PLACE. FAILURE TO FOLLOW THIS WARNING COULD RESULT IN SERIOUS INJURY.

14.0 TROUBLESHOOTING PROCEDURES

STOPPAGES AND MALFUNCTIONS

 WARNING

IF A NOTICEABLE DIFFERENCE IN SOUND OR RECOIL IS EXPERIENCED, STOP FIRING. EITHER CONDITION COULD INDICATE INCOMPLETE POWDER BURN AND/OR PROJECTILE STUCK IN THE BORE. RETRACT THE BOLT SLOWLY AND REMOVE THE FIRED CARTRIDGE CASE. CLEAR THE FIREARM AND CHECK FOR UNBURNED POWDER GRAINS OR PROJECTILE LODGED IN BORE. REMOVE UNBURNED POWDER OR BULLET FROM BORE BEFORE RESUMING FIRING. IF A BULLET IS STUCK IN THE BORE, TAKE THE FIREARM TO A GUNSMITH OR QUALIFIED ARMORER.

Stoppages and malfunctions

- A **stoppage** is failure of semi-automatic or an automatic firearm to complete its cycle of operation. The user can apply immediate or remedial action to clear stoppages. Some stoppages that cannot be cleared by immediate or remedial actions could require firearm repair to correct the problem.
- A **malfunction** is caused by procedural or mechanical failure of the rifle, magazine, or ammunition. Function checks and preventative maintenance

checks identify potential problems before they become malfunctions. Repeated malfunctions can indicate a firearm requires cleaning and lubrication or inspection by qualified armorer.

- Should you incur a stoppage or malfunction, the recommended first action to get firearm back into service is referred to as an immediate action.

IMMEDIATE ACTION

Immediate action involves quickly applying possible correction to overcome a stoppage based on initial observation or indicators but without determining actual cause. To apply immediate action, perform following steps:

STEP 1 - TAP - Aggressively TAP the bottom of the magazine to ensure it is properly seated and magazine follower is not jammed.

STEP 2 - RACK - RACK the charging handle fully to rear and check the chamber (observe for ejection of live or expended cartridge). If a round is not present in the chamber or partially fed from the magazine, release the charging handle (do not ride it forward) allowing bolt to go forward under spring tension. Strike the forward assist to ensure bolt closure.

STEP 3 - ASSESS - ASSESS the situation and attempt to re-engage the target as necessary.

Apply immediate action only one time for any given stoppage. Do not apply immediate action a second time. If the firearm still fails to fire, inspect it to determine the cause of stoppage or malfunction and take the appropriate remedial action.

REMEDIAL ACTION

WARNING

IF FIREARM STOPS FIRING WITH LIVE ROUND IN CHAMBER OF HOT BARREL, REMOVE MAGAZINE AND ROUND AS FAST AS POSSIBLE. HOWEVER, IF ROUND CANNOT BE REMOVED WITHIN 10 SECONDS, REMOVE MAGAZINE, AND WAIT 15 MINUTES WITH FIREARM POINTING IN A SAFE DIRECTION. FAILURE TO DO SO CAN RESULT IN SERIOUS

INJURY DUE TO POTENTIAL OF ROUND COOKING OFF. REGARDLESS, KEEP FACE AWAY FROM EJECTION PORT WHILE CLEARING A HOT CHAMBER.

Remedial action is a continuing effort to determine the cause for a stoppage or malfunction and attempt to clear the stoppage once it has been identified. To apply remedial action, perform following steps:

STEP 1 - Attempt to place firearm on safe.

STEP 2 - LOCK - Pull and LOCK the charging handle to rear.

STEP 3 - RIP - RIP or remove the magazine from the firearm.

STEP 4 - WORK - WORK firearm's action and clear any obstructions from chamber area.

STEP 5 - LOOK - LOOK through the ejection port to visually inspect the firearm for any obvious broken parts or obstructions.

STEP 6 - RELOAD - RELOAD the firearm with new magazine.

STEP 7 - Strike the forward assist to ensure bolt closure.

STEP 8 - Attempt to re-engage the target as necessary.

Should remedial action fail to get the firearm to fire, the firearm should undergo thorough cleaning, inspection, and lubrication.

If the firearm still fails to fire after thoroughly cleaning, inspecting, and lubricating, there has likely been a part failure and qualified armorer should further inspect the firearm.

MALFUNCTIONS AND CORRECTIVE ACTIONS

Malfunctions and Corrective Actions

- The table below lists common malfunctions that may occur during the operation or maintenance of the rifle or its components. Perform function checks and corrective action in the order listed.
- This manual does not list all malfunctions that may occur, nor all tests and inspections and corrective actions. If malfunction is not corrected by listed

corrective actions, please contact the FN Product Service Center or forward the rifle to qualified armorer for corrective action.

- Should problems occur with the firearm, use following guidelines to identify the source and corrective action necessary. Eliminate the following areas in order to prevent wasting time:
- **Ammunition.** Ammunition issues can cause problems with firearm systems. If problems are with wide range of firearms, your ammunition should be looked at first. If your ammunition is found to be faulty, dispose of it in accordance with local ordinances.
- **Magazine.** Inspect magazines for large dents to the body, spring tension, and damage to feed lips. Use a new or different magazine.
- **Firearm.** Inspect for issues with the firearm, first identify where the problem originates in regard to the cycle of operation.

MALFUNCTIONS

Failure to feed, chamber, or lock. Malfunctions can occur when loading firearm or during the cycle of operation. Once a magazine has been loaded into rifle, forward movement of the bolt carrier group could lack enough force (generated by expansion of the buffer spring) to feed, chamber, and lock the first round. While firing, the cycle of operation is interrupted by failure to strip the round from the magazine, to chamber the round, and to lock it.

Failure to fire cartridge. Failure of the cartridge to fire despite the fact that a round has been chambered, trigger is pulled, and sear has released the hammer. This occurs when the firing pin fails to strike the primer with enough force or when the ammunition is bad.

Failure to extract and eject. Failure to extract results when the cartridge case remains in rifle chamber. When the bolt and bolt carrier recoil fully to the rear a cartridge case is remains in the chamber. Then, another round is forced into base of the cartridge case as the bolt returns in next feed cycle. This malfunction is one of the hardest to clear.

Failure to extract is considered an extremely serious malfunction, requiring use

of tools to clear. The live round could be left in the chamber and be accidentally discharged. If second live round is fed into the primer of chambered live round, the rifle could explode and cause personal injury.

Severity of failure to extract determines the corrective action procedures. If the bolt has moved rearward far enough so that it strips a live round from magazine in its forward motion:

- Bolt and carrier must be physically held to the rear.
- Magazine and all loose rounds must first be removed before clearing the stoppage.
- Ensure the bolt and carrier are physically held to the rear and keep your face away from muzzle; tapping the butt of firearm on a hard surface usually causes the cartridge to fall out of the chamber.
- However, if the cartridge case is ruptured, it can be seized. When this occurs, a cleaning rod can be inserted into chamber from the muzzle end.
- Tapping the cleaning rod against the inside of fired cartridge will clear cartridge from chamber.
- When cleaning and inspecting the extractor and chamber reveal no defects but failure to extract persists, it is possible that the chamber surface is damaged, and the barrel must be replaced.

Failure to eject. Failure to eject cartridge is an element in firearm's cycle of functioning, regardless of the mode of fire. Malfunction occurs when a cartridge is not ejected through the ejection port and either remains partly in chamber or becomes jammed in the upper receiver as the bolt closes. When the user initially clears the rifle, the cartridge could strike the inside surface of receiver and bounce back into path of the bolt.

Other malfunctions. Most probable malfunctions that can occur are as follows:

- **Failure of bolt to remain in the rearward position after last the round in magazine is fired.** Check for bad magazines or short recoil.
- **Failure of bolt to lock in the rearward position when bolt release has been engaged.** Check the bolt release; replace as required.

- **Failure of the magazine to lock into the rifle.** Check the magazine and magazine catch for damage. Contact the FN Product Service Center or take it to a gunsmith to adjust the catch; replace as required.
- **Failure of any part of the moving parts assembly to function.** Check for incorrect assembly of components. Correctly clean and assemble the moving parts assembly or replace damaged parts.

- **Failure of ammunition to feed from the magazine.** Check for a damaged magazine. Damaged magazines could cause repeated feeding failures and should be replaced.

MALFUNCTIONS AND CORRESPONDING CORRECTIVE ACTIONS

MALFUNCTION	TEST OR INSPECTION	CORRECTIVE ACTION
Failure to feed, chamber, lock	Excess dirt or debris in and around moving parts assembly	Disassemble, clean, inspect, and reassemble.
	Defective magazine (dented or bulged)	Replace magazine.
	Magazine improperly loaded	Inspect, unload, and reload ammunition into magazine.
	Defective round	Unload magazine, remove round, and load magazine.
	Debris in chamber area	Clean chamber area.
	Debris in and around bolt lugs and chamber area	Clean bolt lugs and chamber area.
	Short recoil	Pull charging handle rearwards to engage bolt carrier then strike forward assist.
Failure to fire	Light indentation on primer of round	Inspect ammunition.
	Defective firing pin	Inspect bolt carrier group. Paying close attention to firing pin tip.
Failure to extract	Short recoil	Inspect chamber area and remove fired cartridge case.
	Damaged extractor or weak/broken extractor spring	Inspect extractor.
	Weak or broken buffer spring	Inspect buffer spring for wear or damage.
	Restricted movement of bolt carrier group	Disassemble, clean, inspect, and reassemble.
	Excessively dirty firearm	Disassemble, clean, inspect, and reassemble.

Failure to eject	Damaged extractor or weak/broken extractor spring	Inspect extractor.
	Excessively dirty firearm, damaged ejector/ejector spring	Disassemble, clean, inspect, and reassemble.

15.0 DISASSEMBLY

WARNING

BEFORE PERFORMING THIS DISASSEMBLY PROCEDURE, PLACE THE SAFETY SELECTOR LEVER IN THE “SAFE” POSITION, EJECT THE MAGAZINE, LOCK THE BOLT OPEN AND MAKE CERTAIN THE CHAMBER IS COMPLETELY UNLOADED. KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. FAILURE TO FOLLOW THESE WARNINGS COULD RESULT IN SERIOUS INJURY OR DEATH.

WARNING

WEAR EYE PROTECTION WHEN DISASSEMBLING AND CLEANING YOUR FIREARM TO PREVENT SPRINGS, SPRING-LOADED PARTS, SOLVENTS AND OTHER AGENTS FROM CONTACTING YOUR EYES, RESULTING IN INJURY.

***CAUTION:* THIS FIREARM IS A SPECIALIZED, FINELY FITTED MECHANISM. YOU MAY DAMAGE IT BEYOND REPAIR OR LOSE SMALL PARTS BY ATTEMPTING TO DISASSEMBLE THE INNER MECHANICAL ASSEMBLIES. IF FURTHER DISASSEMBLY FOR SERVICE OR CLEANING BEYOND WHAT IS DESCRIBED HERE IS REQUIRED, SEND IT TO THE FN PRODUCT SERVICE CENTER IN COLUMBIA, SOUTH CAROLINA.**

***CAUTION:* THE FOLLOWING DISASSEMBLY PROCEDURES ARE DESIGNED TO BE PERFORMED WITH FINGER PRESSURE ONLY AND NO TOOLS ARE TO BE USED. IF YOU CANNOT COMPLETE THE DISASSEMBLY PROCEDURES DESCRIBED WITHOUT THE USE OF TOOLS, STOP, AND CONTACT THE FN PRODUCT SERVICE CENTER IN COLUMBIA, SOUTH CAROLINA.**

SAFETY CHECK

Carry out the following procedures to ensure the FN 15 can be manipulated,


stored, and/or transported without any risk.

STEP 1 - Ensure the firearm on "SAFE" and point the firearm in a safe direction.

STEP 2 - Remove the magazine by depressing the magazine release.

STEP 3 - Lock the bolt carrier group to the rear by pulling the charging handle

FIGURE 17

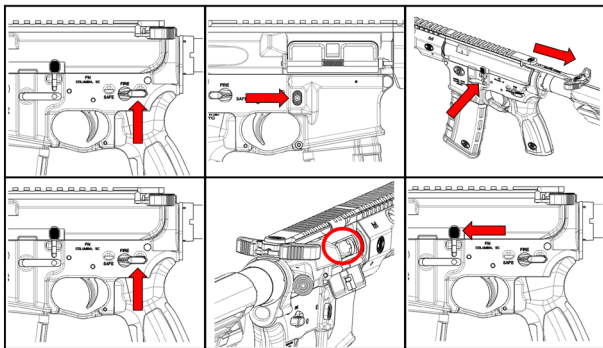

Safety check.

and depressing the bolt catch.

STEP 4 - Re-ensure the firearm is on "SAFE."

STEP 5 - Visually and physically inspect the chamber, ensuring it is empty.


STEP 6 - Press the bolt catch and watch bolt close on an empty chamber.

DISSASSEMBLY

Point the firearm in a safe direction.


Release lower receiver. From the left side of firearm, push in on the takedown pin; pull out from the right until the lower receiver is released from the upper receiver. Allow the upper receiver to rotate downwards onto the pivot pin. Extra

FIGURE 18

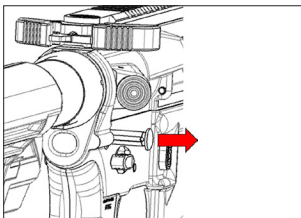

Pull takedown pin.

FIGURE 19

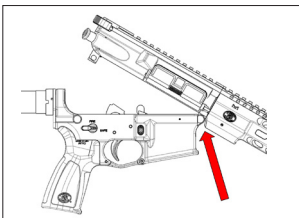


Caution - pinch point.

care should be taken when separating the upper and lower receivers. Because of the mounting device on the rail, there is minimal clearance between the rail and the lower receiver, the rail may come in contact with the lower receiver causing damage to the rail, the lower receiver and potentially pinching your hand.

⚠ WARNING


DO NOT TRY TO REMOVE THE TAKEDOWN PIN ON THE LOWER RECEIVER. THE TAKEDOWN PIN IS RETAINED IN THE LOWER RECEIVER BY THE TAKEDOWN PIN DETENT.

FIGURE 20

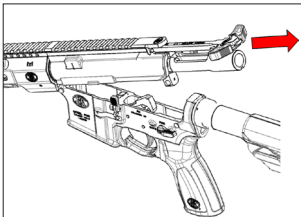

Remove bolt carrier assembly.

FIGURE 21

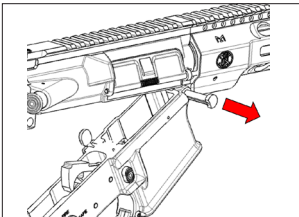

Pull pivot pin.

Remove the bolt carrier group from the upper receiver by depressing the charging handle latch and withdrawing it rearward from the upper receiver.

Remove the upper receiver from the lower receiver by pressing the pivot pin on left side of the firearm and pulling out from the right until the two halves (upper and lower receiver) separate.

⚠ WARNING

DO NOT TRY TO REMOVE PIVOT PIN ON LOWER RECEIVER. PIVOT PIN IS RETAINED IN LOWER RECEIVER BY PIVOT PIN DETENT.

⚠ WARNING

IT IS NOT NECESSARY TO COMPLETELY DISASSEMBLE REMAINDER OF MOVING PARTS ASSEMBLY FOR HASTY APPLICATION OF LUBRICANT. IT IS RECOMMENDED THAT OPERATOR OR ARMORER CONSIDER ENVIRONMENTAL AND OPERATIONAL CONDITIONS PRIOR TO DISASSEMBLING ENTIRE MOVING PARTS ASSEMBLY.


Detailed disassembly of the bolt carrier group.

Remove the firing pin retaining pin by pulling it out of the left side of the bolt carrier.

Remove the firing pin by pulling it out of the rear of the bolt.


Rotate the bolt cam pin 90 degrees and then pull it out of the bolt carrier.

FIGURE 22




Remove firing pin retaining pin.

FIGURE 23




Remove firing pin.

FIGURE 24




Remove cam pin.

FIGURE 25



Remove bolt assembly.

FIGURE 26



Remove extractor.

Remove the bolt out of the front of the bolt carrier.


Use the firing pin to push the extractor pin out of the bolt assembly, taking care not to lose the extractor pin. The extractor assembly can now be removed from the bolt assembly.

CAUTION: IT IS NOT RECOMMENDED TO DISASSEMBLE THE BOLT ASSEMBLY OR BOLT CARRIER GROUP BEYOND THIS POINT FOR NORMAL CLEANING AND MAINTENANCE.

Remove the buffer and action spring from the lower receiver - Ensure the hammer is cocked. Slightly press rearward on the buffer assembly to relieve the spring tension. While doing so, press down on the buffer retainer to release the buffer and action spring from the lower receiver.


⚠ WARNING

FIGURE 27

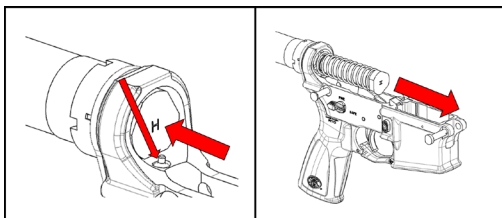

Remove buffer.

FIGURE 28

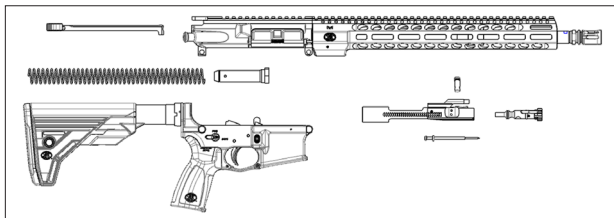

FN15 field stripped.

**ALL SPRING-LOADED ASSEMBLIES ARE UNDER SPRING TENSION;
UNINTENTIONAL RELEASE WILL RESULT IN FLYING PARTS AND
POSSIBLE INJURY.**

The firearm is now fieldstripped for cleaning and maintenance.

REMOVE THE HANDGUARD FROM THE UPPER RECEIVER

***CAUTION:* UNDER NORMAL CONDITIONS, REMOVAL OF THE HANDGUARDS IS
NOT NECESSARY FOR MAINTENANCE.**


TAC3 AND DMR3 FREE FLOAT HANDGUARD REMOVAL

To remove the handguard the upper receiver assembly should be removed from the lower receiver.

Using a 5/64" hex bit and bit driver or a hex wrench, remove the side set screws on both sides of the handguard. Take note that the screws have been fastened with low-strength thread lock.

Using a T15 Torx® bit and bit driver or Torx wrench, loosen the wedge screw by turning counterclockwise (viewed from the muzzle end of the firearm). Ensure

FIGURE 29

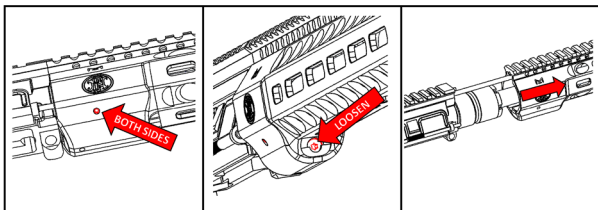


Remove handguard.

that wedge screw is not completely removed.

Remove the handguard assembly from upper receiver by sliding towards the muzzle. Remove and store the anti-rotation pin from the upper receiver or handguard so it does not get lost.


TAC3-DUTY FREE FLOAT HANDGUARD REMOVAL

FIGURE 30



Remove tension screws and torque plate.

FIGURE 31



Remove handguard.

Loosen and remove the two handguard tension screws using a 5/32" hex wrench. Remove the Torque Plate.

The handguard can now be removed from the upper receiver by pulling away from the upper receiver until it is completely free of the barrel.


Disassembly of the 30-round magazine assembly

⚠ WARNING

**ALL SPRING-LOADED ASSEMBLIES ARE UNDER SPRING TENSION;
UNINTENTIONAL RELEASE WILL RESULT IN FLYING PARTS AND
POSSIBLE INJURY.**

STEP 1 - Using a cleaning rod or screwdriver, push on the tab on floor plate

FIGURE 32

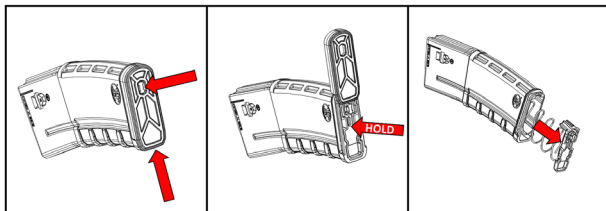

Magazine disassembly.

releasing it from the magazine body.

STEP 2 - Ease the floorplate towards the rear of the magazine, maintaining tension on the floorplate lock your thumb. Remove the floorplate from the magazine body.


STEP 3 - Remove the spring by pulling it slowly until the follower is removed completely from magazine body.

16.0 ASSEMBLY

NOTE! IF THE FREE FLOAT HANDGUARD WAS REMOVED FOR MAINTENANCE, INSTALL THE HANDGUARD FIRST.

TAC3 AND DMR3 FREE FLOAT HANDGUARD INSTALLATION

FIGURE 33

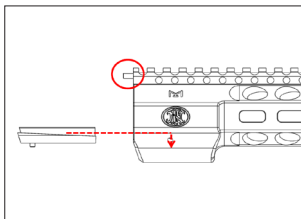


Install wedge set.

If necessary, install the wedge set into the bottom hand guard. Ensure the wedge screw is visible from the front and that the wedge locator pin is in the hole in the bottom of the hand guard. Ensure the wedge set is securely seated in the handguard. Install the anti-rotation pin into the handguard.

Install the handguard onto the upper receiver by sliding it over the barrel and barrel nut. Align the anti-rotation pin with the corresponding hole in the upper receiver. Force the handguard the rest of the way over the barrel nut until the handguard is against the upper receiver. Use a rubber hammer if necessary.

Install the two 8-32X1/8" side set screws using the 5/64 Allen Wrench. The use of a low strength thread locking compound (Loctite 222MS or equivalent) is

FIGURE 34

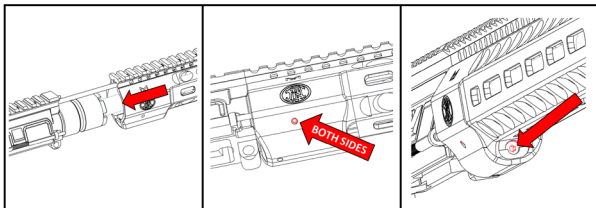


Install handguard.

recommended. Tighten screws until they contact the barrel nut and go ¼-turn past tight or use a torque wrench and tighten to 15 in-lbs., do not over-tighten. Using the T-15 Torx wrench or bid driver tighten the wedge screw clockwise. The wedges are designed with a built-in stop so they cannot be over-tightened.

TAC3-DUTY - FREE FLOAT HANDGUARD INSTALLATION


Position the handguard so the Picatinny rail is at the 12 o'clock position, slide the handguard over the barrel and onto the barrel nut. Be sure the handguard is completely seated on to the barrel nut and the 12 o'clock rail on the receiver

FIGURE 35



Install plate and screws.

FIGURE 36



Tighten.

and handguard are touching and the sides of the rail are aligned.


Install the torque plate into the slot in the handguard, (make sure the holes in the handguard line up with the holes in the plate) and finger tighten the bolts. Align the rail on the handguard with the rail upper receiver before torquing the tension screws.

Using a 5/32" hex wrench torque the handguard tension screws to 35 inch-pounds.

INSTALL THE BUFFER AND BUFFER SPRING

Ensure the hammer is in the cocked position.

FIGURE 37

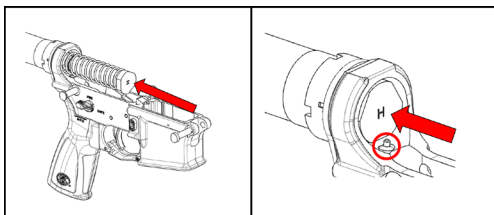

Install buffer.

Install the buffer into the buffer spring.


Insert the opposite end of the buffer and buffer spring into the buffer tube located in the lower receiver.

Fully insert the buffer and buffer spring into the buffer tube until the buffer retainer locks them into place.

REASSEMBLE THE BOLT AND BOLT CARRIER


Install the extractor into the bolt by

FIGURE 38




Install extractor.

FIGURE 39



Align gas rings.

FIGURE 40




Install bolt assembly.

setting it in place and pressing the extractor pin in place until flush on both ends.

Ensure the gaps in the three gas rings of the bolt do not align and insert the rear end of the bolt into the front of the bolt carrier until it stops.


FIGURE 41

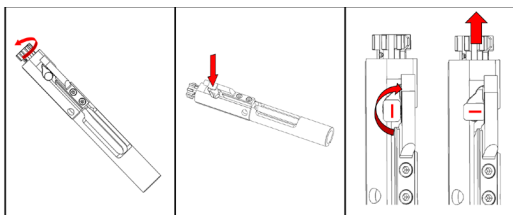

Install cam pin.


Rotate the bolt in the bolt carrier until the bolt cam pin hole aligns with the bolt cam pin slot. Insert the cam pin into the cam pin hole located inside the bolt. If the cam pin does not fit, rotate the bolt 180 degrees inside the bolt carrier.

FIGURE 42

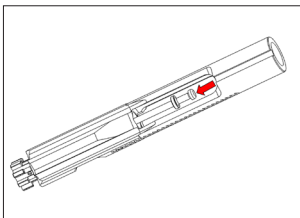

Install firing pin.

FIGURE 43

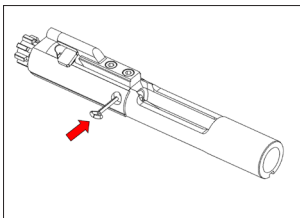

Install firing pin retaining pin.

Once the cam pin is installed, rotate the cam pin 90 degrees in the cam pin hole.


Insert the firing pin into the back of the bolt carrier and into the bolt. Insert the firing pin retaining pin into the bolt carrier. It should sit flush with the outside diameter of the bolt carrier and hold the firing pin in place.

INSTALLING THE BOLT CARRIER GROUP

Install the charging handle into the rear opening of the upper receiver. The charging handle has two guides that will fall into a keyway inside the upper receiver. Do not fully insert the charging handle at this time.


Ensure the bolt is fully extended in the bolt carrier and the cam pin sits

FIGURE 44

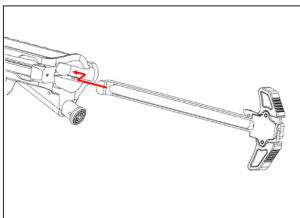

Charging handle.

FIGURE 45

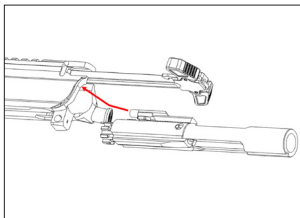


Install bolt carrier assembly.

underneath the gas key. Align the gas key with the inside of the charging handle. Insert the bolt carrier into the upper receiver. The bolt carrier should easily go fully forward, and the rear of the bolt carrier should be flush with the back of the upper receiver. Push the charging handle all the way forward into its locked position.

REASSEMBLE THE UPPER AND LOWER RECEIVERS

Ensure the front pivot pin is pulled out to the right, in the disassembly position.

FIGURE 46



Connect upper and lower receiver.

Align the front lower receiver pin and the front upper receiver pin hole; press the front pivot pin to the left until fully seated.

Rotate the upper and lower receivers together until the rear take down pin aligns with the rear pin hole. Press the pin to the left to secure both halves into place.

FUNCTION CHECK

Carry out the following procedure to ensure the FN 15® can be manipulated, stored, and/or transported without any risk.

1. Remove the magazine and ensure the firearm is clear and safe.
2. Point the firearm in safe direction.
3. Cycle firearm by pulling the charging handle and place the selector lever on "SAFE."

4. Attempt to pull the trigger; the hammer should not fall.
 5. Place the selector lever on "FIRE."
 6. Pull and hold the trigger to the rear; the hammer should fall. Do not release the trigger.
 7. Re-cycle the firearm by using the charging handle.
 8. Slowly release the trigger; an audible click should be heard.
 9. Pull and hold the trigger to rear; the hammer should fall.
 10. Cycle the firearm one more time and place the selector on "SAFE."
- Reassemble the 30-round magazine assembly.


 **WARNING**

**ALL SPRING-LOADED ASSEMBLIES ARE UNDER SPRING TENSION;
UNINTENTIONAL RELEASE WILL RESULT IN FLYING PARTS AND
POSSIBLE INJURY.**

STEP 1 - Insert the follower and spring into the body ensuring the follower is oriented in the proper direction.

STEP 2 - Slowly work the follower and spring into the body until the floor plate

FIGURE 47

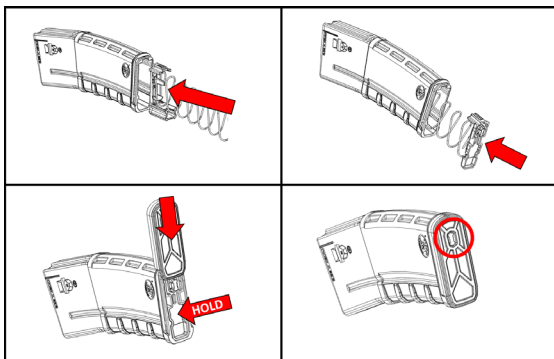

Magazine assembly.

lock is inside the magazine body

STEP 3 – Maintain pressure on the floor plate lock and ease the floorplate back into position.

STEP 4 - Fully seat the floorplate into body until the tab on the floorplate lock goes into the cutout on the floorplate and locks the floorplate into the body.

17.0 INSPECTION, CLEANING AND LUBRICATION

INSPECTION GUIDE


Prior to, during, and after use, users should inspect firearm and its components for any irregularities that may cause problems during operation. If any of below potential deficiencies are noted, users should correct them immediately.

- Damaged or missing parts.
- Improper assembly or function.
- Restricted movement of any type, where applicable.
- Uncustomary looseness of barrel extension screws or parts.
- Parts exhibiting signs of cracks, burrs, dents, or obvious signs of damage or stress.
- Lack of presence of tactile clicks in controls, where applicable.
- General overall cleanliness.
- Lack of proper lubrication.
- Presence of corrosion or degradation of surface finish.

Inspection Guide for Lower Receiver

- A. Inspect buffer for cracks or damage.
- B. Inspect buffer spring for kinks.
- C. Inspect buttstock for broken buttplate or cracks.

FIGURE 48

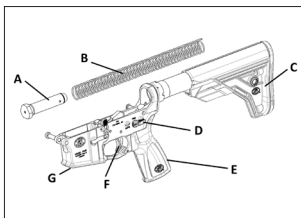


Lower receiver inspection.

- D. Inspect for bent or broken selector lever.
- E. Inspect rifle grips for cracks or damage.
- F. Inspect for broken or bent trigger.
- G. Visually inspect the inside parts of the lower receiver for broken or missing parts.

Inspection Guide for Upper Receiver and Barrel Assembly

- A. Inspect handguards for cracks or large dents.

FIGURE 49

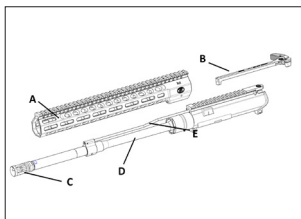


Upper receiver inspection.

- B. Inspect charging handle for cracks bends or breaks
- C. Inspect compensator for looseness.
- D. Inspect barrel for straightness.
- E. Inspect gas tube for bends or retention to barrel.

Inspection Guide for Bolt Carrier Group

- A. Inspect bolt cam pin for cracking or chipping.
- B. Inspect firing pin for bends, cracks or sharp or blunted tip.
- C. Inspect Bolt for missing or broken gas rings.
- D. Inspect the bolt cam pin area for cracking or chipping.
- E. Inspect locking lugs for cracking or chipping.
- F. Inspect bolt face for excessive pitting.
- G. Inspect extractor assembly for missing extractor spring assembly with

FIGURE 50

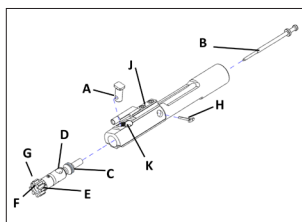

Bolt carrier assembly inspection.

insert and for chipped or broken edge.

- H. Inspect firing pin retaining pin to determine if bent or badly worn.
- J. Inspect bolt carrier for loose bolt carrier key.
- K. Inspect for cracking or chipping in cam pin hole area.

CLEANING GUIDE

 WARNING

WEAR EYE PROTECTION WHEN DISASSEMBLING AND CLEANING YOUR FIREARM TO PREVENT SPRINGS, SPRING-LOADED PARTS, SOLVENTS AND OTHER AGENTS FROM CONTACTING YOUR EYES, RESULTING IN INJURY.

 WARNING

KEEP ALL AMMUNITION AWAY FROM THE CLEANING AREA. NEVER TEST THE MECHANICAL FUNCTION OF YOUR FIREARM WITH LIVE AMMUNITION.

Cleaning in Normal Conditions


1. Unload, clear, and place the Firearm on safe; perform safety check.
2. Field strip the firearm.
3. Inspect the chamber and bore for powder fouling. A normal amount of powder residue can be expected and is not serious. It can usually be removed with a patch and CLP (cleaner, lubricant, and protectant) that conforms to MIL-L-63460 or equivalent bore cleaner.
 - 3.1. Attach the cleaning rods together.
 - 3.2. Point the muzzle down. Hold the receiver in one hand while inserting the male end of rod into the chamber. Let rod fall straight through the bore, about 2 to 3 inches should be sticking out of the muzzle.
 - 3.3. Attach the handle adapter, and handle to the end of cleaning rod sticking out of muzzle, and attach appropriate caliber bore brush to female end sticking out of chamber. DO NOT reverse direction while in bore.
 - 3.4. Pull the bore brush through the bore out of the muzzle end. Remove the handle. Let the rod fall straight through the bore from the chamber end again and reattach the handle. Repeat the process until the bore shows minimal signs of debris.
 - 3.5. Replace the bore brush with the rod patch eyelet (patch holder) and 1/2 clean patch. Pull it through the bore, out of the muzzle end.

- 3.6. After one pull, take off the handle and repeat the process. Replace the dirty patch with a clean patch and continue pulling through the bore (out of the muzzle end) until the patch shows minimal signs of debris.
- 3.7. Install the chamber brush on the cleaning rod and attach it to the T-handle rod. Insert the additional rod through the hole in the T-handle rod. Apply CLP to the chamber brush and insert it in chamber and locking lugs. Clean by pushing and rotating the cleaning rod clockwise.

CAUTION: DO NOT USE A STAINLESS-STEEL BORE BRUSH TO CLEAN THE BORE. IT WILL DAMAGE THE CHROME PLATING.

4. After all fouling has been removed, the chamber and bore should be wiped dry. When the bore is dry, pass a patch that is lightly lubricated with CLP through it for preservation.
5. Inspect the barrel and chamber to be certain no patches have inadvertently been left in them. Remove any that remain.
6. Use a small brush or rag to remove dirt and foreign matter from inside the upper and lower receivers and other parts of the action. Lightly lubricate all moving parts with CLP.
7. Use a cleaning brush and CLP to scrub the fouling from the bolt and bolt carrier. It may be necessary to use a bronze brush to remove carbon buildup from the tail of the bolt and interior of the bolt carrier. Use a pipe


FIGURE 51

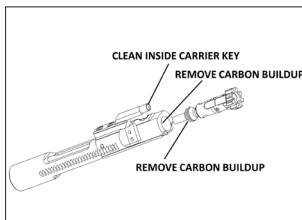

Bolt carrier cleaning.

cleaner to clean inside the carrier key. It should pass through to the inside of the bolt carrier. The tail of the bolt and interior of the bolt carrier are not to be lubricated; wipe them dry after they have been cleaned.

FIGURE 52

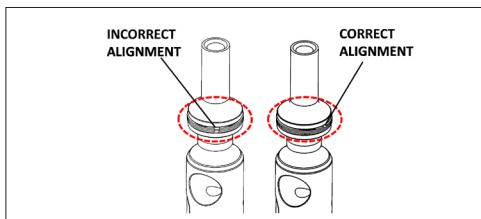

Gas ring alignment.

8. Inspect the three gas rings on the tail of the bolt. Wipe them clean with a brush or patch. Ensure their gaps are not lined up.

CAUTION: DO NOT APPLY LUBRICANT TO THE GAS RINGS ON THE BOLT OR THE INTERIOR OF THE BOLT CARRIER. THESE COMPONENTS ARE NOT TO BE LUBRICATED IN ANY WAY. USING LUBRICATION IN THE GAS SYSTEM MAY DAMAGE THE FIREARM AND CAUSE MALFUNCTIONS.

9. Wipe all exposed metal surfaces with a lightly oiled cloth making certain that all fingerprints are removed.
10. Use a plastic bristled cleaning brush to clean any dirt or debris from polymer stock parts and handguards. If the polymer parts become excessively dirty, clean warm water may be used to rinse them off. Use a soft cloth to wipe them dry and clean. Use a pipe cleaner to clean the small port in the rear of the buffer tube on the buttstock assembly.
11. Do not use bronze or steel brushes to clean anodized aluminum parts as damage to the finish may result.

12. Use compressed air or polymer-safe aerosol gun cleaner to clean the trigger assembly. Do not attempt to disassemble the trigger mechanism for cleaning. Apply a few drops of CLP to the moving parts.

CAUTION: DO NOT APPLY EXCESSIVE LUBRICANT TO ANY PART OF THE FIREARM. EXCESSIVE LUBRICATION COULD INTERFERE WITH THE FUNCTION OF YOUR FIREARM.

Cleaning in Adverse Conditions

In most adverse conditions, increased and more frequent maintenance will ensure your FN 15 continues to operate effectively and safely. Once you have left such an environment, perform a more detailed cleaning of your FN 15.

Follow the below guidelines for specific conditions:

1. Dry and Dusty Conditions

- More frequent cleaning may be required where dust and blowing sand can enter the firearm. Use a brush or compressed air to remove.
- Keep the dust cover closed when possible to limit the debris that can enter the receiver.
- Keep magazines and ammunition protected and inspect them frequently for sand and dust. Do not lubricate the ammunition or magazines.
- Corrosion will be less likely in dry conditions, so less protectant is required on external parts. These protectants will only attract more dust and sand.
- Use minimal lubricant on internal parts.

2. Hot and Humid Conditions

- Increase inspection of all steel parts for corrosion or rust, including under the handguards. Apply protectant (CLP) as needed to prevent rust from forming.
- Corrosion will be more likely in a hot and humid environment, so additional protectant may be required on external parts. Wipe them frequently with a cloth to remove fingerprints and moisture. Reapply

protectant (CLP) as needed.

- Keep magazines and ammunition protected and dry. Inspect frequently for the presence of moisture. Avoid placing ammunition in direct sunlight.
- Normal lubrication of internal parts will suffice.

3. Extreme Cold Conditions

- Keep the dust cover closed when possible to limit any frozen or freezing precipitation from entering the firearm.
- Keep magazines and ammunition protected and dry. Inspect frequently for the formation of ice.
- Avoid taking the firearm from warm, moist indoor environments to the cold outside environment and back as condensation (moisture) will form and freeze on and inside the firearm.
- Wipe the exterior of the firearm frequently to remove any moisture and reapply protectant to exposed steel parts.
- Avoid excess liquid lubrication on internal parts as these lubricants may stiffen at lower temperatures and cause malfunctions. Use minimal lubrication.
- Use a lubricant specifically formulated for low temperatures.

4. High Round Count Bore Cleaning

- Attach three cleaning rods together.
- Point the muzzle down. Hold the receiver in one hand while inserting the male end of the rod into the chamber. Let the rod fall straight through the bore, about 2 to 3 inches should be sticking out of the muzzle.
- Attach the handle adapter, and the handle to the end of the cleaning rod sticking out of the muzzle, and attach the appropriate caliber bore brush to the female end sticking out of the chamber. DO NOT reverse direction while in the bore.
- Apply CLP to the brush and pull the bore brush through the bore out of the muzzle end. Remove the handle. Let the rod fall straight through the

bore from the chamber end again and reattach the handle. Repeat the process until the bore shows minimal signs of debris.

- Replace the bore brush with a rod patch eyelet (patch holder) and a clean patch.
- Apply the copper remover KG12 or similar, to the patch and pull it through bore, out of the muzzle end.
- Remove the patch
- Repeat the above steps and pull a second patch with copper remover through the bore.
- Discard patch and let the barrel set for 10 minutes to allow the copper cleaner to dissolve the copper residue.
- Attach the handle adapter and handle to end of the cleaning rod sticking out of the muzzle, and attach the appropriate caliber bore brush to the female end sticking out of the chamber. DO NOT reverse direction while in the bore.
- Apply CLP to the brush and pull the bore brush through the bore out of the muzzle end. Remove the handle. Let the rod fall straight through the bore from the chamber end again and reattach the handle. Repeat the process until the bore shows minimal signs of debris.
- Replace the bore brush with a rod patch eyelet (patch holder) and a clean patch.
- After one pull, take off the handle and repeat the process. Replace the dirty patch with a clean patch and continue pulling through the bore (out of the muzzle end) until the patch shows minimal signs of debris.

LUBRICATION GUIDE

Lubricants

CLP – Cleaner, Lubricant and Preservative per MIL-L-63460 or equivalent
High Quality Gun Oil

CAUTION: DO NOT LUBRICATE BORE AND CHAMBER FOR NORMAL USE.

General Guidelines for using Lubrication Guide


Wherever the term CLP or the words lube, or lubricant are cited in this manual it is to be interpreted to mean that CLP or a High-Quality Gun Oil

Lubrication Points

Lower Receiver

- Light lubrication on the hammer, and hammer spring.

FIGURE 53

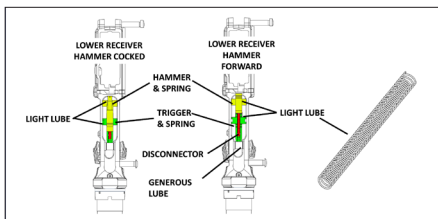


Lubrication of the lower receiver.

- Generous lubrication on the safety lever detent.
- Light lubrication on the trigger/disconnector area.
- Light lubrication on the buffer spring.
- Lightly lubricate joints at LOP adjustment area as well as the LOP buttstock latch, and QD sling attachment points. Blow out with air (if possible) or brush clean with a nylon cleaning brush, keeping debris from accumulating.

Bolt Carrier Assembly

NOTE! IT IS NOT NECESSARY TO COMPLETELY DISASSEMBLE ENTIRE BOLT CARRIER GROUP FOR HASTY APPLICATION OF LUBRICANT. IT IS RECOMMENDED THAT USERS CONSIDER ENVIRONMENTAL AND OPERATIONAL CONDITIONS PRIOR TO DISASSEMBLING ENTIRE BOLT CARRIER GROUP.


FIGURE 54

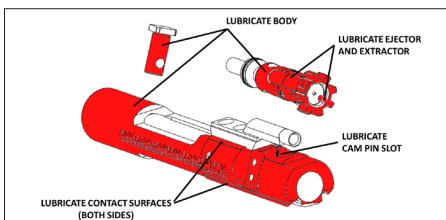

Lubrication of the bolt carrier assembly.

- Generous lubrication on the extractor and ejector. Manipulate each part to work in lubrication and ensure functionality.
- Generous lubrication on the bolt body.
- Generous lubrication on the bolt cam pin and bolt cam pin slot.
- Generous lubrication on the bolt carrier contact surfaces and bottom of the bolt carrier.

FIGURE 55

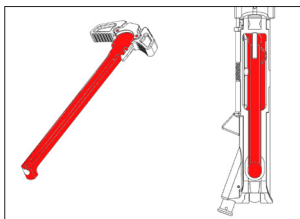

Lubrication of the upper receiver.

- Generous lubrication on the bolt carrier body.

Upper Receiver Group

NOTE! IT IS NOT NECESSARY TO LUBRICATE EXTERIOR ALUMINUM SURFACES.

- Generous lubrication on all receiver guide rails and bolt carrier riding surfaces.
- Light lubrication in the charging handle.

18.0 SERVICE POLICY

If you have any questions about this owner's manual or other FN products, contact:

FN Product Service Center

797 Old Clemson road

Columbia, SC 29229

Phone 1-800-635-1321

Or visit us online at www.fnamerica.com

IF YOU DO NOT UNDERSTAND THE INSTRUCTIONS FOR OPERATING YOUR FN FIREARM, IT IS YOUR RESPONSIBILITY TO CONTACT FN CUSTOMER SERVICE AT 1-800-635-1321 BEFORE USING THE FIREARM.

This owner's manual should always accompany this firearm and be transferred with it upon any change of ownership.

FN products are serviced by the FN Product Service Center in Columbia, SC.

Please call 1-800-635-1321 to discuss any product repair requirements.

Shipping Address:

FN Product Service Center

797 Old Clemson road

Columbia, SC 29229

All specifications subject to change without notice.

19.0 WARRANTY, SERVICE AND TECHNICAL QUESTIONS

For technical questions about service or your firearm, or if your FN product should require service or repair contact the FN Product Service Center in Columbia, SC. Law enforcement and military users should contact their department or unit armorer.

FN Product Service Center

797 Old Clemson road

Columbia, SC 29229

Phone 1-800-635-1321

When returning your FN firearm for servicing you must do the following:

1. Be sure it is completely unloaded.
2. Remove the scope, optics, and accessories. Do NOT remove any parts or components required by local, state, or federal law.
3. Package it securely in a cardboard container.
4. Enclose the service/repair form available at www.fnamerica.com or a

letter that clearly describes the trouble experienced, the ammunition used and the repairs desired. Also include your name, e-mail address (if possible) and a daytime phone number where you can be reached.

5. If convenient, send a copy of the service/repair form or letter to us separately.
6. Never return ammunition with your firearm. It is against postal and most commerce regulations

20.0 CHARACTERISTICS, CAPABILITIES AND FEATURES

Specification	FN15 TAC3 Carbine.
SKU/Product Number	36-100632 (BLACK) , 36-100642 (FDE), 36-100652 (TUNGSTEN GREY)
Caliber	5.56x45mm NATO
Barrel Length	16"
Twist Rate	1:7" RH
Barrel Material	FN Proprietary Steel, DIN Spec 21CrMoV5-11, Hammer Forged, Chrome Lined
Gas System	Carbine Direct Impingement, H Buffer
Sight System	None provided
Sight Radius	19.4" (max)

Handguard	Free Float with M-LOK® slots at 3, 6 and 9 o'clock
Stock	Collapsible, 6 position
Weight	7.0 Lbs.
Length	36.2" stock extended, 33" stock collapsed
Trigger Pull	4.75 - 7.75 lbs.
Magazine	30 rounds, Polymer

Specification	FN15 TAC3-Duty Carbine
SKU/Product Number	36-100658
Caliber	5.56x45mm NATO
Barrel Length	16"
Twist Rate	1:7" RH
Barrel Material	FN Proprietary Steel, DIN Spec 21CrMoV5-11, Hammer Forged, Chrome Lined
Gas System	Carbine Direct Impingement, H Buffer
Sight System	None provided
Sight Radius	20" (max)

Handguard	Free Float with M-LOK® slots at 3, 6 and 9 o'clock
Stock	Collapsible, 6 position
Weight	6.5 Lbs.
Length	36.2" stock extended, 33" stock collapsed
Trigger Pull	4.75 - 7.75 lbs.
Magazine	30 rounds, Polymer

Specification	FN15 DMR3 Rifle
SKU/Product Number	36-100669 (BLACK), 36-100676 (FDE), 36-100683 (TUNGSTEN GREY)
Caliber	5.56x45mm NATO
Barrel Length	18"
Twist Rate	1:8" RH
Barrel Material	FN Proprietary Steel, DIN Spec 21CrMoV5-11, Hammer Forged, Chrome Lined
Gas System	Rifle Direct Impingement, H Buffer
Sight System	None provided
Sight Radius	19.4" (max)
Handguard	Free Float with M-LOK® slots at 3, 6 and 9 o'clock
Stock	Collapsible, 6 position
Weight	8.2 Lbs.

NOTES

NOTES

NOTES

NOTES



FN 15[®]

WWW.FNAMERICA.COM