

Mobile Self-Leveling Cabinets

Heated - Stainless Steel



Model 6306



Specifications

Easy Field Adjustment For Plate Dispensing Height Without Tools.

- All-welded stainless steel construction.
- Corner bumpers protect cabinet, furniture, and doors.
- Each heated dispenser features its own thermostatic control.
- Easy-Glide™ design provides quiet, non-stick operation.
- 4" Lake-Glide® casters - all swivel, 2 with brake, extra-load.

Spec. #

AIA #

Mobile Cabinet: Mobile cabinets shall be of all-welded stainless steel construction. Cabinets shall have 18-gauge top and 20-gauge sides and bottom and shall include bottom corner bumpers. Cabinet bottom shall have center clean out hole. Casters shall be 4" (102 mm) diameter extra-load swivel (two with locking brake). Unit shall feature a heavy-duty independent undercarriage frame of galvanized steel to which casters shall be mounted. Units shall be NSF listed.

Dispenser Tubes: Dispenser tubes shall be of welded stainless steel construction and shall drop into mobile cabinet top openings. Dispensers shall hang from cabinet opening by an 18-gauge flange ring, and feature three each 22-gauge vertical side supports welded to 20-gauge bottom plate. Self-leveling dish carriage shall be of welded stainless steel construction and shall travel vertically in dispenser tube with nylon guides for smooth operation. Carriage shall have 22-gauge removable dish platform. Dispensers shall feature flange mounted perimeter extension springs, which are detachable from the dish carriage, to provide adjustment without tools for different weight dishes. Each dispenser shall have a vertical stacking capacity of 25" (635 mm).

Heating Unit: Unit shall be 120 VAC 60 Hz and shall have 6' (1829 mm) coiled power supply cord with 5-15P NEMA plug (5-20P on Models 6409 and 6410) for 120 VAC. Cabinet shall have interior mounted electrical junction box with twist-lock receptacles for individual power to each dispenser. Dispenser tubes shall be fully enclosed in 22-gauge stainless steel, and have a circular bottom mounted 300 or 450 watt heater element to provide convection heat. Heating system shall feature thermostatic control in a tamper protective location with safe high-end shut off. Control shall have Infinite settings between low and high temperature cut-outs. Thermostat shall be field adjustable for average interior air temperature between 100° F (38° C) and 175° F (79° C) at middle adjustable thermostatic setting. On-off switch and power indicator light shall be mounted on top flange of dispenser. Average dish temperature rise of 40° F (22° C) above ambient shall be achieved within one hour of initial heating cycle at middle adjustable thermostatic setting. Cabinet and dispenser tubes shall be UL listed.







Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Mobile Self-Leveling Cabinets

Heated - Stainless Steel

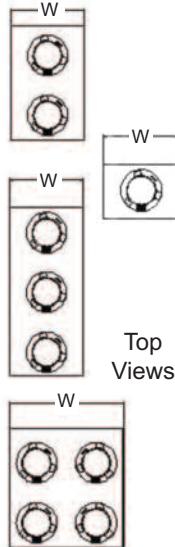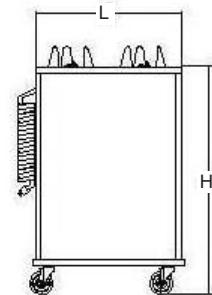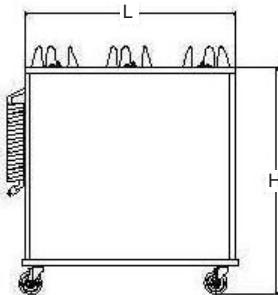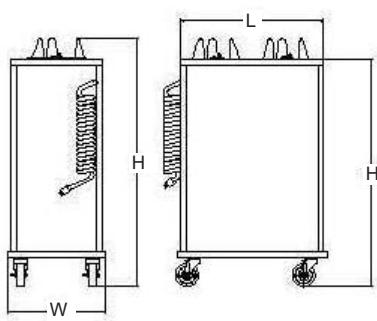

AutoCAD drawings available through KCL CADalog

Dimensions

Single Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical Watts	Ship Weight	
		W	L	H			
6100	Up to 5" (127)	18½"	22½"	40" (470 571 1013)	300	2.5	93 (42.1 kg)
6105	5-7/8" to 6-1/2" (149 to 165)	18½"	22½"	40" (470 571 1013)	300	2.5	93 (42.1 kg)
6106	5-7/8" to 6-1/2" (149 to 165)	18½"	22½"	40" (470 571 1013)	300	2.5	95 (42.8 kg)
6107	6-5/8" to 7-1/4" (168 to 184)	18½"	22½"	40" (470 571 1013)	300	2.5	98 (44.1 kg)
6108	7-3/8" to 8-1/8" (187 to 206)	18½"	22½"	40" (470 571 1013)	300	2.5	105 (47.3 kg)
6109	8-1/4" to 9-1/8" (210 to 232)	18½"	22½"	40" (470 571 1013)	450	3.75	110 (49.5 kg)
6110	9-1/4" to 10-1/8" (235 to 257)	18½"	22½"	40" (470 571 1013)	450	3.75	115 (51.8 kg)
6111	10-1/4" to 11" (235 to 279)	18½"	22½"	40" (470 571 1013)	450	3.75	122 (51.8 kg)
6112	10-1/4" to 12-1/4" (260 to 311)	18½"	22½"	40" (470 571 1013)	450	3.75	122 (55.0 kg)

Two Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical Watts	Ship Weight	
		W	L	H			
6200	Up to 5" (127)	18½"	32"	40" (470 813 1013)	600	5.0	100 (45.2 kg)
6205	5-7/8" to 6-1/2" (149 to 165)	18½"	32"	40" (470 813 1013)	600	5.0	100 (45.2 kg)
6206	5-7/8" to 6-1/2" (149 to 165)	18½"	32"	40" (470 813 1013)	600	5.0	103 (46.7 kg)
6207	6-5/8" to 7-1/4" (168 to 184)	18½"	32"	40" (470 813 1013)	600	5.0	106 (48.1 kg)
6208	7-3/8" to 8-1/8" (187 to 206)	18½"	32"	40" (470 813 1013)	600	5.0	117 (53.1 kg)
6209	8-1/4" to 9-1/8" (210 to 232)	18½"	32"	40" (470 813 1013)	900	7.5	121 (54.9 kg)
6210	9-1/4" to 10-1/8" (235 to 257)	18½"	32"	40" (470 813 1013)	900	7.5	125 (56.9 kg)
6211	10-1/4" to 11" (235 to 279)	18½"	32"	40" (470 813 1013)	900	7.5	138 (62.6 kg)
6212	10-1/4" to 12-1/4" (260 to 311)	20½"	36½"	40" (527 927 1013)	900	7.5	138 (62.6 kg)

Three Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical Watts	Ship Weight	
		W	L	H			
6300	Up to 5" (127)	18½"	46½"	40" (470 1178 1013)	900	7.5	171 (77.4 kg)
6305	5-7/8" to 6-1/2" (149 to 165)	18½"	46½"	40" (470 1178 1013)	900	7.5	171 (77.4 kg)
6306	5-7/8" to 6-1/2" (149 to 165)	18½"	46½"	40" (470 1178 1013)	900	7.5	176 (80.0 kg)
6307	6-5/8" to 7-1/4" (168 to 184)	18½"	46½"	40" (470 1178 1013)	900	7.5	180 (81.8 kg)
6308	7-3/8" to 8-1/8" (187 to 206)	18½"	46½"	40" (470 1178 1013)	900	7.5	192 (87.3 kg)
6309	8-1/4" to 9-1/8" (210 to 232)	18½"	46½"	40" (470 1178 1013)	1350	11.3	169 (89.1 kg)
6310	9-1/4" to 10-1/8" (235 to 257)	18½"	46½"	40" (470 1178 1013)	1350	11.3	200 (90.9 kg)

Four Stack Models

Model	Accommodates Plate Size	Dimensions			Electrical Watts	Ship Weight	
		W	L	H			
6400	Up to 5" (127)	32"	32"	40" (813 813 1013)	1200	10.0	188 (85.4 kg)
6405	5-7/8" to 6-1/2" (149 to 165)	32"	32"	40" (813 813 1013)	1200	10.0	188 (85.4 kg)
6406	5-7/8" to 6-1/2" (149 to 165)	32"	32"	40" (813 813 1013)	1200	10.0	192 (87.3 kg)
6407	6-5/8" to 7-1/4" (168 to 184)	32"	32"	40" (813 813 1013)	1200	10.0	193 (87.4 kg)
6408	7-3/8" to 8-1/8" (187 to 206)	32"	32"	40" (813 813 1013)	1200	10.1	220 (100.0 kg)
6409	8-1/4" to 9-1/8" (210 to 232)	32"	32"	40" (813 813 1013)	1800	15.0	222 (100.1 kg)
6410	9-1/4" to 10-1/8" (235 to 257)	32"	32"	40" (813 813 1013)	1800	15.0	225 (102.3 kg)

Measurements in () denote metric millimeters, unless otherwise specified.

Optional Accessories

- Stainless steel dispenser covers
- 208/240 VAC 60Hz
- 220 VAC 50Hz
- Bottom perimeter bumper
- 8" (203 mm) vertical one-piece push handle
(not available on four stack models)



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com