



650 WATT UNDER COUNTER-TOP INCOCNEETO™ INDUCTION BUFFET

B651-U, B652-U

Product Name	650 Watt Under Counter-Top Incogneeto™ Induction Buffet	Quantity	Item #
	   <p>Magneeto 2 pictured - one included with purchase of each unit</p> 		<p>Note: Induction buffet units require the use of induction compatible (i.e. magnetic) cookware.</p>   

Standard Features

- Under counter-top design, aluminum housing, heavy duty energy efficient electronics, and polycarbonate top
- Mounts to underside of counter-top on fixed position track system - 18.4" (468mm) supplied. Additional 4' (1.2m) lengths of track available as an accessory to allow for re-positioning of the units under counter
- Units require CookTek Magneeto™ 2 trivet (patent pending) - included with each unit - and standard induction compatible chafing dishes. Magneeto™ 2 acts as a temperature sensor, communicator, and locator device which allows heating of induction compatible dishes through standard counter-top
- Units compatible with 3/4" or 1 1/4" (20 or 30mm) thick standard granite countertops - call or see website for additional approved materials
- Temperature selected via control panel, or Magneeto™ 2 can be programmed via keypad to preset a temperature for automatic control
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to chafing dishes, keeps food in the "safe zone," and keeps operations within ventilation code
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included (MUST BE SHIELDED).
- Lock feature prevents unwanted setting changes
- Red LED display for precise user feedback and control

- Available in 650 watts (100-120VAC - three units per 15 amp circuit, four per 20 amp circuit) and 650 watts (200-240VAC - five units per 15 amp circuit)
- Three year limited warranty
- Made in the USA*

Specifications

Shall be a CookTek under counter-top induction buffet unit, model _____ with a total kW rating of 0.65 kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and polycarbonate top.

Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan-maximizer feature to ensure maximum heating of any induction compatible pan.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

NOTE: When mounting, the TOTAL DISTANCE from the top of the unit to the top of the countertop must be 1.57" (40mm)

*of USA and imported parts

CookTek Induction Systems, LLC
156 N. Jefferson St. Ste 300
Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266.5835)
Toll Free Fax: 1.888.COOKFAX (266.5329)

B65x-U 11347_A US

650 WATT UNDER COUNTER-TOP INCOCNEETO™ INDUCTION BUFFET B651-U, B652-U








650 WATT UNDER COUNTER-TOP INCOGNEETOTM INDUCTION BUFFET

B651-U, B652-U




650 WATT UNDER COUNTER-TOP INCOGNEETOTM INDUCTION BUFFET
B651-U, B652-U

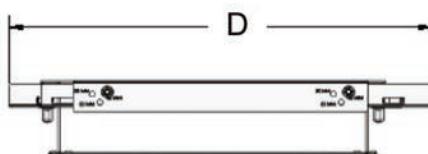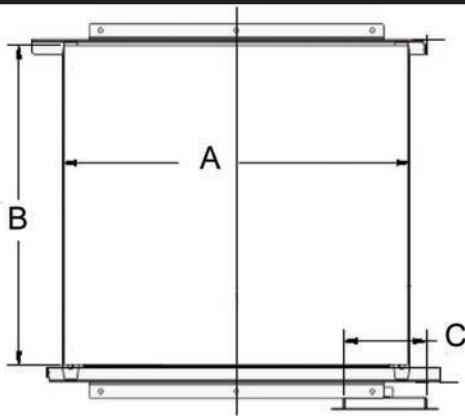

Front View

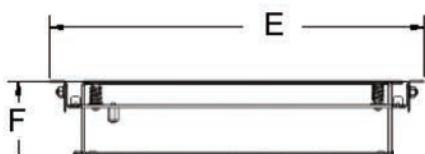

Side View



Dimensions		
	inches	mm
A	16.23	412
B	14.91	378
C	3.90	99
D	19.76	510
E	17.50	444
F	4.17	105
G	3.81	97
H	2.46	62
J	3.26	83
K	1.91	49
L	1.02	26
M	2.25	57
N	2.90	74



Specifications

Model Number	B651-U	B652-U
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1 Ph
Power Consumption	650W (max)	650W (max)
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	5A (max)	2.7A (max)
Power Range	100-650W	100-650W
Preset Temperatures	150, 160, 175, 190°F / 65, 70, 80, 85°C	150, 160, 175, 190°F / 65, 70, 80, 85°C
Additional Temperature Settings Range	80-190°F / 30-85°C	80-190°F / 30-85°C
Dimensions (in)	16.23" x 14.91" x 4.17"	16.23" x 14.91" x 4.17"
Dimensions (mm)	412 x 378 x 105	412 x 378 x 105
Weight	15 lbs / 6.8 kg	15 lbs / 6.8 kg
Packaged Weight	20 lbs / 9 kg	20 lbs / 9 kg
Packaged Dimensions (in)	20" x 20" x 10"	20" x 20" x 10"
Packaged Dimensions (mm)	508 x 508 x 254	508 x 508 x 254
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20P
Remote Control Box Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Warranty	36 months limited parts and labor	36 months limited parts and labor

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
156 N. Jefferson St. Ste 300
Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266.5835)
Toll Free Fax: 1.888.COOKFAX (266.5329)

