

## BULK RETHERMALIZATION CABINET

### Item Numbers

☐ DXBRC14

☐ DXBRC28



*One-touch programming for up to 12 preset retherm schedules. Optional menu holder ensures accuracy and quality.*

### Construction

Completely welded cabinet construction with outer cabinet welded to base. All seams turned in to eliminate raw edges. Exterior wall shall be 20-gauge 300 series stainless steel. Interior shall be 20-gauge 300 series stainless steel with 16 gauge water reservoir. Base frame shall be 12-gauge stainless steel full depth caster bolsters with 12-gauge stainless steel perimeter supports welded to bolsters.

**Doors:** Welded double panel stainless steel door, 20-gauge polished exterior and 20-gauge interior filled with 2" thick high density fiberglass insulation. Field reversible doors. Menu card holder with laminated menu card. Adjustable edge mount hinges with chrome plate finish.

**Handles:** Two recessed pull grips on sides of cabinet.

**Latch:** Heavy duty edge mount latch with magnetic catch.

**Tray Rack Assembly:** Removable 18-gauge stainless steel ducts. Removable 16-gauge stainless steel universal slides, fully adjustable at 1-3/4" spacing. Standard spacing at 3-1/2" centers.

### Heating & Humidity System

Top mounted heater with two 2000 watt coiled inconel-sheathed heating elements. High impedance protected, internally cooled fan motor. Dual cooling fans. Precision engineered interior heat duct system. Manual fill water bath with 2000 watt heating element. Extra large surface area to quickly recover humidity level.

### Controller

Solid state electronic controller with digital display and two button touch pad. Factory preset for 12 rethermalization and hold modes. Field programmable

### Electrical

Operates on 208v, 60 cycle single phase, 6000 watts, 28.8 AMPS. Ten foot rubber cord with 3 prong grounding plug NEMA L6-30P

### Performance

Capable of heating to 195°F (91°C). Preheat to 225°F (107°C) in approximately 20 minutes. 95% maximum relative humidity


### Warranty

One year parts and labor.


# DINEX<sup>®</sup>

Building 2, Suite 106  
628 Hebron Avenue  
Glastonbury, CT 06033  
800.523.9752 Fax: 860.652.3135  
www.dinex.com

# BULK RETHERMALIZATION CABINET



DXBRC14  
Front View

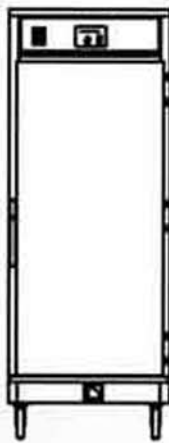

DXBRC28  
Front View



Top View

## Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	SLIDE SPACING	MAXIMUM PAN/TRAY CAPACITY		SHIP WEIGHT
						18" x 26"	12" x 20"	
DXBRC14	BRC14	27.25" (69.2cm)	34.25" (87.0cm)	48.75" (123.8cm)	3.5" (8.9cm)	7	14	375 lb. (170kg)
DXBRC28	BRC28	27.25" (69.2cm)	34.25" (87.0cm)	73.25" (186.1cm)	3.5" (8.9cm)	14	28	450 lb. (204kg)

## Electrical

VOLTS	WATTS	AMPS	PLUG
208v	6000	28.8	NEMA #L6-30P



Please confirm that you have the most current specification sheet by visiting [www.dinex.com](http://www.dinex.com).  
Dinex® reserves the right to change specifications and product design without notice.  
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA

# DINEX®

Building 2, Suite 106  
628 Hebron Avenue  
Glastonbury, CT 06033  
800.523.9752 Fax: 860.652.3135  
[www.dinex.com](http://www.dinex.com)

162-REV 10/09