


MOBILE PLATE DISPENSERS - ENCLOSED



Item Numbers

- DXIDP Plate Dispensers
- DXIDPH Plate Heaters

Application

These self-leveling mobile style plate dispensers are offered two, three or four silo, enclosed heated or unheated. These self-leveling mobile style plate dispensers can be found on tray lines, front or back-of-the-house, or any place your needs require.

Construction

Mobile cabinets are constructed of all welded stainless steel construction with #3 polished finish. Cabinet has 18-gauge top and 20 gauge side panels. Cabinet is mounted on four 5" extra-load swivel casters (two with brakes). Cabinet bottom has center clean out hole and includes perimeter bumper..

Heating System

The heating system is thermostatically controlled, in a tamper protective location. Thermostat is field adjustable with a temperature range between 100 to 189 degrees. On/off switch and power indicator light are mounted on top flange of dispenser. Unit is 120 volt, 60 Hz and features a 8' long cord set and 5-15P NEMA plug.

Dispenser

Self-leveling dispensers are constructed of stainless steel and travel vertically in dispenser tube with nylon guides for smooth operation. Dispenser features flange mounted perimeter extension springs, which are detachable to provide adjustment without tools.


Warranty

One year parts and labor.

DINEX[®]

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

MOBILE PLATE DISPENSERS - ENCLOSED

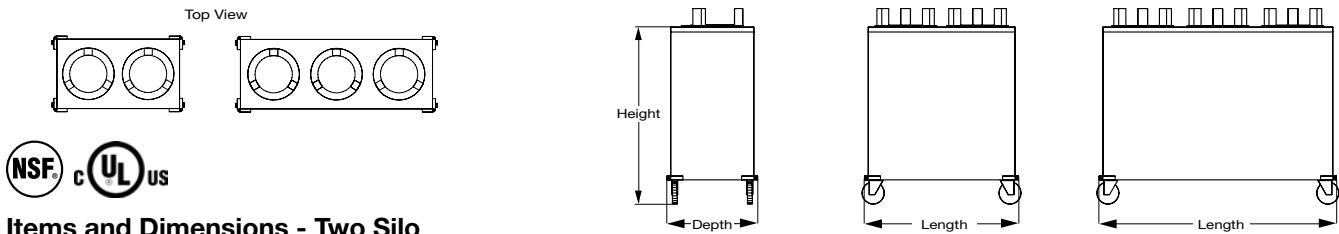

Items and Dimensions - Two Silo

ITEM NO. UNHEATED	MODEL NO. UNHEATED	SHIP WT.	ITEM NO. HEATED	MODEL NO. HEATED	SHIP WT.	120v-1PH		L	D	H	MAX. PLATE SIZE	SHIP CUBE
						WATTS	AMPS					
DXIDP2E0650	IDP2E/0650	85 lb. (38.5kg)	DXIDPH2E0650	IDPH2E/0650	103 lb. (46.7kg)	600	5.0	32" (81cm)	18.50" (47cm)	36.75" (93cm)	6.5"	13.5
DXIDP2E0725	IDP2E/0725	87 lb. (39.4kg)	DXIDPH2E0725	IDPH2E/0725	106 lb. (48.0kg)	900	7.5	32" (81cm)	18.50" (47cm)	36.75" (93cm)	7.25"	13.5
DXIDP2E0812	IDP2E/0812	94 lb. (42.6kg)	DXIDPH2E0812	IDPH2E/0812	117 lb. (53.0kg)	600	5.0	32" (81cm)	18.50" (47cm)	36.75" (93cm)	8.125"	13.5
DXIDP2E0912	IDP2E/0912	161 lb. (74.0kg)	DXIDPH2E0912	IDPH2E/0912	186 lb. (84.4kg)	900	7.5	32" (81cm)	18.50" (47cm)	36.75" (93cm)	9.125"	13.5
DXIDP2E1012	IDP2E/1012	163 lb. (44.4kg)	DXIDPH2E1012	IDPH2E/1012	190 lb. (86.3kg)	900	7.5	32" (81cm)	18.50" (47cm)	36.75" (93cm)	10.125"	13.5
DXIDP2E1200	IDP2E/1200	175 lb. (79.5kg)	DXIDPH2E1200	IDPH2E/1200	203 lb. (92.2kg)	900	7.5	36.5" (93cm)	20.75" (53cm)	36.75" (93cm)	12.25"	13.5

Items and Dimensions - Three Silo

ITEM NO. UNHEATED	MODEL NO. UNHEATED	SHIP WT.	ITEM NO. HEATED	MODEL NO. HEATED	SHIP WT.	120v-1PH		L	D	H	MAX. PLATE SIZE	SHIP CUBE
						WATTS	AMPS					
DXIDP3E0650	IDP3E/0650	112 lb. (50.8kg)	DXIDPH3E0650	IDPH3E/0650	136 lb. (61.6kg)	900	7.5	46.5" (118cm)	18.50" (47cm)	36.75" (93cm)	6.50"	19.7
DXIDP3E0725	IDP3E/0725	112 lb. (50.8kg)	DXIDPH3E0725	IDPH3E/0725	140 lb. (63.5kg)	900	7.5	46.5" (118cm)	18.50" (47cm)	36.75" (93cm)	7.25"	19.7
DXIDP3E0812	IDP3E/0812	123 lb. (55.7kg)	DXIDPH3E0812	IDPH3E/0812	152 lb. (68.9kg)	900	7.5	46.5" (118cm)	18.50" (47cm)	36.75" (93cm)	8.125"	19.7
DXIDP3E0912	IDP3E/0912	188 lb. (85.4kg)	DXIDPH3E0912	IDPH3E/0912	223 lb. (101.2kg)	1350	11.3	46.5" (118cm)	18.50" (47cm)	36.75" (93cm)	9.125"	19.7
DXIDP3E1012	IDP3E/1012	190 lb. (86.3kg)	DXIDPH3E1012	IDPH3E/1012	225 lb. (102.2kg)	1350	11.3	46.5" (118cm)	18.50" (47cm)	36.75" (93cm)	10.125"	19.7
DXIDP3E1200	IDP3E/1200	194 lb. (87.0kg)	DXIDPH3E1200	IDPH3E/1200	227 lb. (103.0kg)	1350	11.3	53.25" (135cm)	20.75" (53cm)	36.75" (93cm)	12.00"	22.7

Items and Dimensions - Four Silo

ITEM NO. UNHEATED	MODEL NO. UNHEATED	SHIP WT.	ITEM NO. HEATED	MODEL NO. HEATED	SHIP WT.	120v-1PH		L	D	H	MAX. PLATE SIZE	SHIP CUBE
						WATTS	AMPS					
DXIDP4E0650	IDP4E/0650	115 lb. (52.1kg)	DXIDPH4E0650	IDPH4E/0650	152 lb. (68.9kg)	1200	10	32" (81cm)	32" (81cm)	36.75" (93cm)	6.5"	24.4
DXIDP4E0725	IDP4E/0725	116 lb. (52.6kg)	DXIDPH4E0725	IDPH4E/0725	153 lb. (69.3kg)	1200	10	32" (81cm)	32" (81cm)	36.75" (93cm)	7.25"	24.4
DXIDP4E0812	IDP4E/0812	138 lb. (62.5kg)	DXIDPH4E0812	IDPH4E/0812	180 lb. (81.6kg)	1200	10	32" (81cm)	32" (81cm)	36.75" (93cm)	8.125"	24.4
DXIDP4E0912	IDP4E/0912	203 lb. (92.2kg)	DXIDPH4E0912	IDPH4E/0912	247 lb. (112.1kg)	1800	15	32" (81cm)	32" (81cm)	36.75" (93cm)	9.125"	24.4
DXIDP4E1012	IDP4E/1012	205 lb. (93.0kg)	DXIDPH4E1012	IDPH4E/1012	250 lb. (113.5kg)	1800	15	32" (81cm)	32" (81cm)	36.75" (93cm)	10.125"	24.4
DXIDP4E1200	IDP4E/1200	207 lb. (94.2kg)	DXIDPH4E1200	IDPH4E/1200	253 lb. (114.2kg)	1800	15	39" (99cm)	36.5" (93cm)	36.75" (93cm)	12.00"	29.7

Please confirm that you have the most current specification sheet by visiting www.dinex.com.
 Dinex® reserves the right to change specifications and product design without notice.
 Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

