

CANTILEVER STYLE TRAY DISPENSERS

Item Numbers

- ☐ DXIDT1C1222
- ☐ DXIDT1C1418
- ☐ DXIDT1C1520
- ☐ DXIDT1C1622
- ☐ DXMOCTD



Item Number: DXIDT1C1520



Item Number: DXMOCTD

Application

These self-leveling cantilever style tray dispensers can be found in tray lines, or any place your needs require.

Construction

All-welded stainless steel construction and accepts trays on a stainless steel spring-loaded, self-leveling carriage. Carriage is cantilevered to a vertical support on two each 14-gauge arms and features a bank of tension springs concealed inside the vertical support.

Spring tension for carriage is field adjustable without tools by hooking or unhooking springs to or from the carriage, providing proper dispensing level. Carriage platform is made of 18-gauge stainless steel and vertical supports panels and top is 20-gauge stainless steel. Unit base is 18-gauge stainless steel and features corner bumpers. Units have on four 5" extra-load casters (two with brakes)


Warranty

One year parts and labor.

DINEX®

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

CANTILEVER STYLE TRAY DISPENSERS

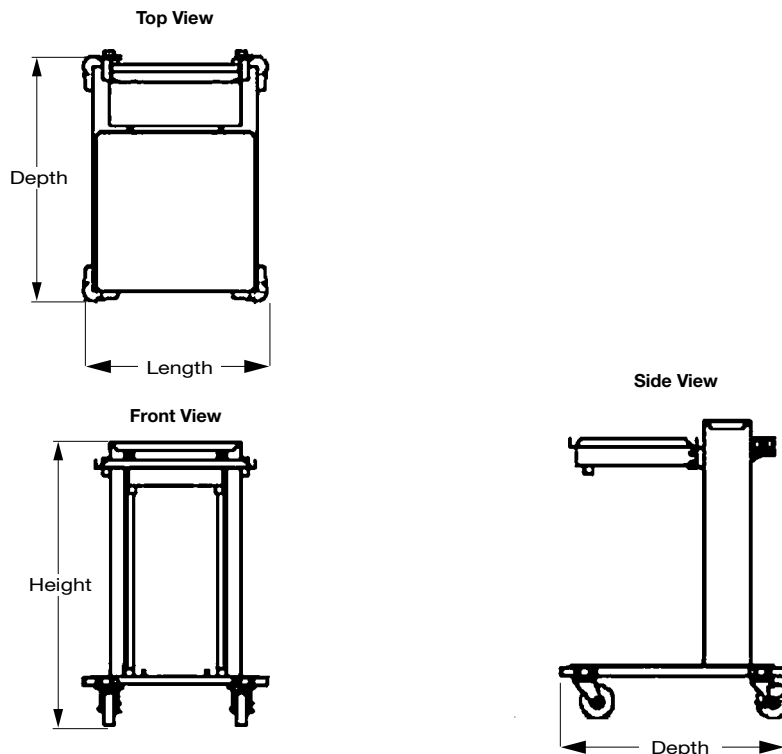

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	CASTERS		MAXIMUM TRAY SIZE	SHIP WEIGHT	SHIP CUBE
					TYPE	DIA.			
DXIDT1C1222	IDT1C/1222	23.50" (59.7cm)	26.50" (67.3cm)	36.25" (92.1cm)	4 Swivel 2 w/brakes	5"	12" x 22" (30.5cm x 55.9cm)	178 lb. (81kg)	14.9
DXIDT1C1418	IDT1C/1418	23.50" (59.7cm)	26.50" (67.3cm)	36.25" (92.1cm)	4 Swivel 2 w/brakes	5"	14" x 18" (35.6cm x 45.7cm)	178 lb. (81kg)	14.9
DXIDT1C1520	IDT1C/1520	23.50" (59.7cm)	26.50" (67.3cm)	36.25" (92.1cm)	4 Swivel 2 w/brakes	5"	15" x 20" (38.1cm x 50.8cm)	178 lb. (81kg)	14.9
DXIDT1C1622	IDT1C/1622	23.50" (59.7cm)	26.50" (67.3cm)	36.25" (92.1cm)	4 Swivel 2 w/brakes	5"	16" x 22" (40.6cm x 55.9cm)	178 lb. (81kg)	14.9
DXMOCTD	MOC/TD	23.50" (59.7cm)	26.50" (67.3cm)	36.25" (92.1cm)	4 Swivel 2 w/brakes	5"	13.5" X 23" (34.3cm x 58.4cm)	178 lb. (81kg)	14.9



Please confirm that you have the most current specification sheet by visiting www.dinex.com.
Dinex® reserves the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA

DINEX®

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

040-REV 01/10