

TRAY DELIVERY CARTS (One Door, Two Trays per Slide)



Item Number: DXTS2T1D16
Shown with optional top rail
and menu holder

Item Numbers

- ☐ DXTS2T1D14
- ☐ DXTS2T1D16
- ☐ DXTS2T1D18
- ☐ DXTS2T1D20

Application

Tray Delivery Carts for insulated base, wax base or induction base systems. These carts are compatible with all Dinex® products for 15" x 20", 14" x 18", 12" x 19" and 12" x 20" trays. These models accommodates two trays per slide.

Construction

Carts are constructed with 304 No. 3 finish stainless steel, all welds are ground and polished. Meal delivery carts are heavy duty stainless steel construction as follows:

Top	20 gauge, 304 No. 4 Finish
End/Back Panels	20 gauge, 304 No. 4 Finish
Base	20 gauge, 304 No. 4 Finish
Door Front	22 gauge, 304 No. 4 Finish
Door Back	22 gauge, 304 No. 4 Finish

Top and base are welded to body of the unit for added strength. All exterior welds are ground and polished. Chassis has 14 gauge stainless steel caster channels.

The 1.125" high, non-marking, polyethylene heavy-duty wrap around bumpers are mounted at full perimeter of the base. Two vertical push handles are front mounted for optimal ergonomic position when pushing the cart. Vents on three sides are standard.

Cam Action Style Door

The door on all models shall be double-walled and insulated. The free floating door has a full 270° door swing. Closure is a gravity lock device, which retains the door in both the 270° open position as well as the 0° closed position.

Adjustable Tray Slides

Stainless steel tray slides, 20 gauge are positioned at specified vertical spacing and removable for cleaning. Slides are field adjustable to accommodate 15" x 20", 14" x 18", 12" x 19" and 12" x 20" trays.

Casters

Four 6" Colson Performa casters, 2 swivel w/brakes and 2 fixed all with precision sealed ball bearings are standard. Casters are plate mounted and bolted to the base.

Standard Features

- 6" Performa casters w/precision sealed ball bearing
- 2-locking casters
- Vertical push handles
- Full length door handle
- Adjustable tray slides

Warranty


One year parts and labor.

DINEX®

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

TRAY DELIVERY CARTS

(One Door, Two Trays per Slide)

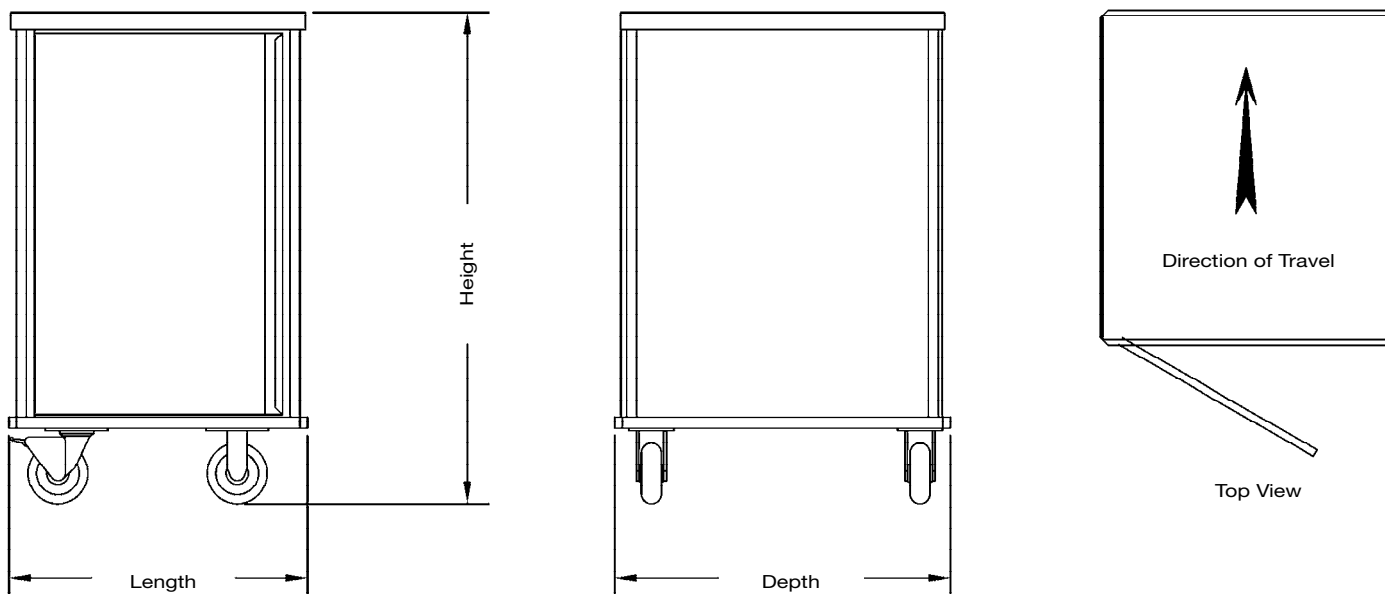

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	SHIP WEIGHT	SHIP CUBE	TRAY SPACING	TRAY CAPACITY
DXTS2T1D14	TS2T1D14	30" (76.2cm)	33.5" (85.1cm)	61.5" (156.2cm)	227 lb. (126kg)	38.5	6.75" (17cm)	14
DXTS2T1D16	TS2T1D16	30" (76.2cm)	33.5" (85.1cm)	61.5" (156.2cm)	227 lb. (126kg)	38.5	5.875" (15cm)	16
DXTS2T1D18	TS2T1D18	30" (76.2cm)	33.5" (85.1cm)	61.5" (156.2cm)	227 lb. (126kg)	38.5	5.375" (14cm)	18
DXTS2T1D20	TS2T1D20	30" (76.2cm)	33.5" (85.1cm)	61.5" (156.2cm)	227 lb. (126kg)	38.5	4.75" (12cm)	20

Optional Accessories

Casters

- 6" Carpet casters
- 8" Performa
- 8" Carpet casters

Top Rail

- 2.3" high (6.5cm), 3-sided
- 2.3" high (6.5cm), 4-sided

Other Options

- Floor Drain
- Menu Card Holder
- Transport Latch
- Tow Hitch
- Wall Saver (Corner Bumper)



Please confirm that you have the most current specification sheet by visiting www.dinex.com.
Dinex® reserves the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA

DINEX®

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

TMP-005-REV 10/09