



Job Name _____

Item # _____

FOOD SERVICE EQUIPMENT

Spec Sheet No. TR-18

Cold Pan

- o CPU-2
- o CPU-3
- o CPU-4
- o CPU-5

Open Base Cabinet

- o CPU-2-BS
- o CPU-3-BS
- o CPU-4-BS
- o CPU-5-BS

Cabinet with Sliding Doors

- o CPU-2-DR
- o CPU-3-DR
- o CPU-4-DR
- o CPU-5-DR

Accessories:

- o Portable Kit - (5" casters, 2 locking & push handle) - Add Prefix **P-**
- o Solid tray Shelf - Models **TTS-(2-5)**
- o Tubular Tray Rail - Models **TTR-(2-5)**
- o Dish Shelf Add-On (mount under tray shelf) - Models **TDS-(2-5)**
- o Stainless End Shelf - Model **BES-2**
- o Double or Single Overshelf - Models **TOS-(2-5)** & **STOS-(2-5)**
- o Buffet Shelf - Model **TBS-(2-5)**
- o Serving Shelf - Model **TSS-(2-5)**



CPU-3 Shown.



Specifications

TOP: 18 gauge #302 stainless steel

BODY: 22 gauge #430 stainless steel.

LEGS: 18 gauge #302 stainless steel with fully adjustable non marking tip.

UNDERSHELF: 22 gauge #430 stainless steel

CUTTING BOARD: 1" thick white thermoplastic.

CUTTING BOARD BRACKETS: 16 gauge #302 stainless steel.

LINING: 8" deep 20 gauge #302 stainless steel welded.

Features

Stainless steel body and legs

Stainless steel undershelf standard



Fiberglass insulation




3125 Trotters Parkway
Alpharetta, GA 30004
www.suprememetal.com

Toll Free: 800-645-2526
770-740-6000
Fax: 770-740-6010

Freight Class 85

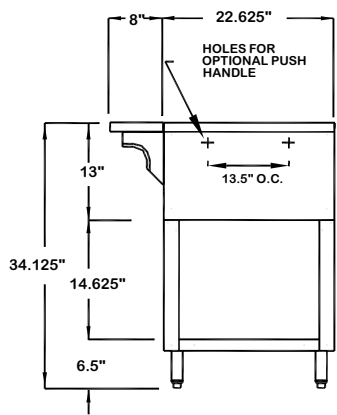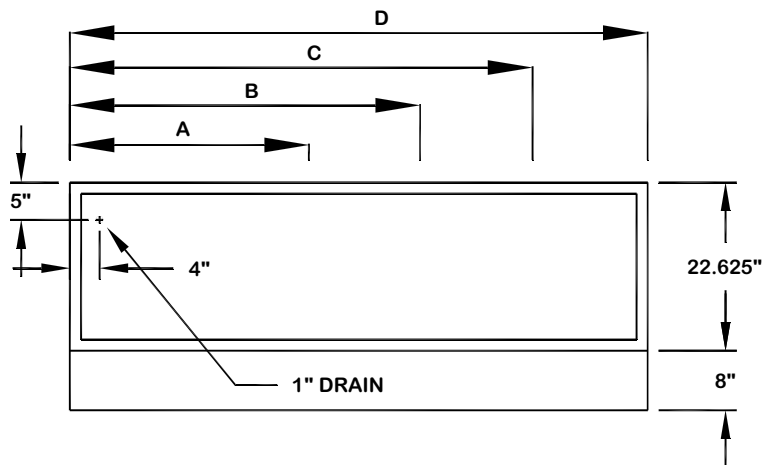

SECTIONAL VIEW

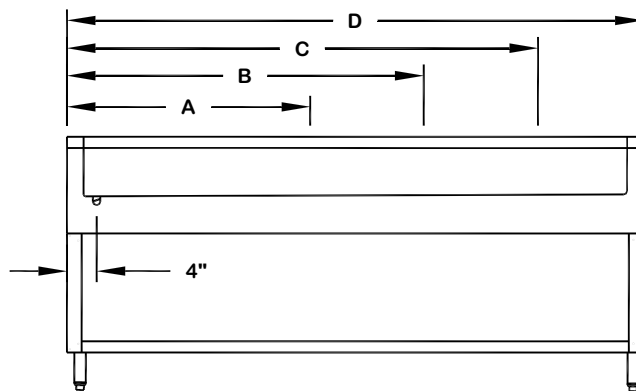

ELEVATION VIEW

Model #	Length	Inside Cabinet Dimensions	Weight	Cubic Feet
CPU-2	A = 31- ¹³ / ₁₆ "	N/A	90	28.1
CPU-3	B = 47 ¹ / ₈ "	N/A	118	41.32
CPU-4	C = 62 ⁷ / ₁₆ "	N/A	150	54.55
CPU-5	D = 77 ³ / ₄ "	N/A	168	66.94
Cabinet Base Models				
CPU-2-BS	A = 31- ¹³ / ₁₆ "	25.3" x 22.4" x 16"	115	28.1
CPU-3-BS	B = 47 ¹ / ₈ "	40.63" x 22.4" x 16"	143	41.32
CPU-4-BS	C = 62 ⁷ / ₁₆ "	55.88" x 22.4" x 16"	185	54.55
CPU-5-BS	D = 77 ³ / ₄ "	71.25" x 22.4" x 16"	203	66.94
Cabinet Base Models with Sliding Doors				
CPU-2-DR	A = 31- ¹³ / ₁₆ "	25.3" x 22.4" x 16"	125	28.1
CPU-3-DR	B = 47 ¹ / ₈ "	40.63" x 22.4" x 16"	153	41.32
CPU-4-DR	C = 62 ⁷ / ₁₆ "	55.88" x 22.4" x 16"	195	54.55
CPU-5-DR	D = 77 ³ / ₄ "	71.25" x 22.4" x 16"	213	66.94