

Prestige 24 Series


Spec Sheet No. PR-50

Job Name _____

Item No. _____

Uni-Serv Speed Bar Standard Features

- All stainless steel structure from top to bottom.
- Mirrored front molding on all units.
- Extruded black polyethylene thermal breaker marine edge.
- Continuous ribbed corrugation.
- All units are foam insulated & undercoated for sound deadening.
- Electrical receptacle provided underneath blender shelf for safety and convenience.

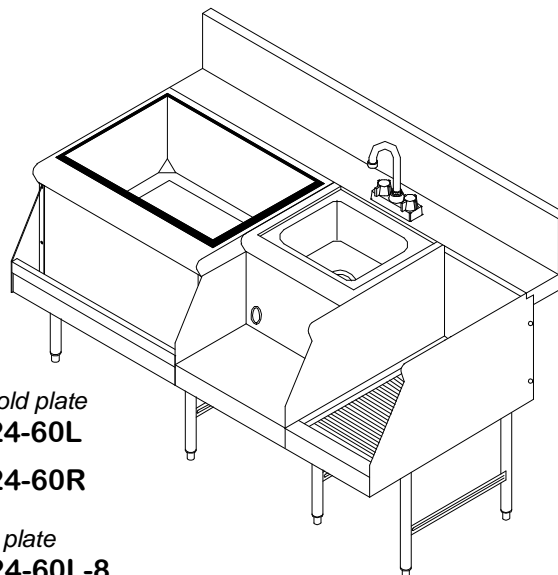

Without cold plate

◦ PRU-24-60L

◦ PRU-24-60R

With cold plate

◦ PRU-24-60L-8

◦ PRU-24-60R-8

Specifications


- **Ice Bin:** 20 gauge 300 series stainless steel.
- **Cold Plate:** Cast aluminum 8 circuit fast flow with 5/16" diameter bump and swedge syrup ends. (optional)
- **Recessed Glass Shelf:** 18 gauge 300 series stainless steel.
- **Blender Shelf:** 20 gauge 300 series stainless steel.
- **Front Apron:** 20 gauge 300 series stainless steel.
- **Plumbing:** 1" I.P.S. drain for non cold plate units and 1/2" I.P.S. on cold plate units, 3-1/2" basket with 1-1/2" I.P.S. drain on sink bowl and 1" I.P.S. drain on glass shelf.
- **Sink:** 9-1/2" x 11-1/2" x 6" bowl, 20 gauge 300 series stainless steel, seamless deep drawn.
- **Legs:** 14 gauge 300 series stainless steel mounting bracket with 1-5/8" O.D. 18 gauge 300 series stainless steel & 1" adjustable stainless steel bullet feet.
- **Faucet:** 4" rear deck mount with goose neck spout. (1/2 NPT-Male)



Supreme Metal

Toll Free: 800-645-2526
www.suprememetal.com

Prestige 24 Series

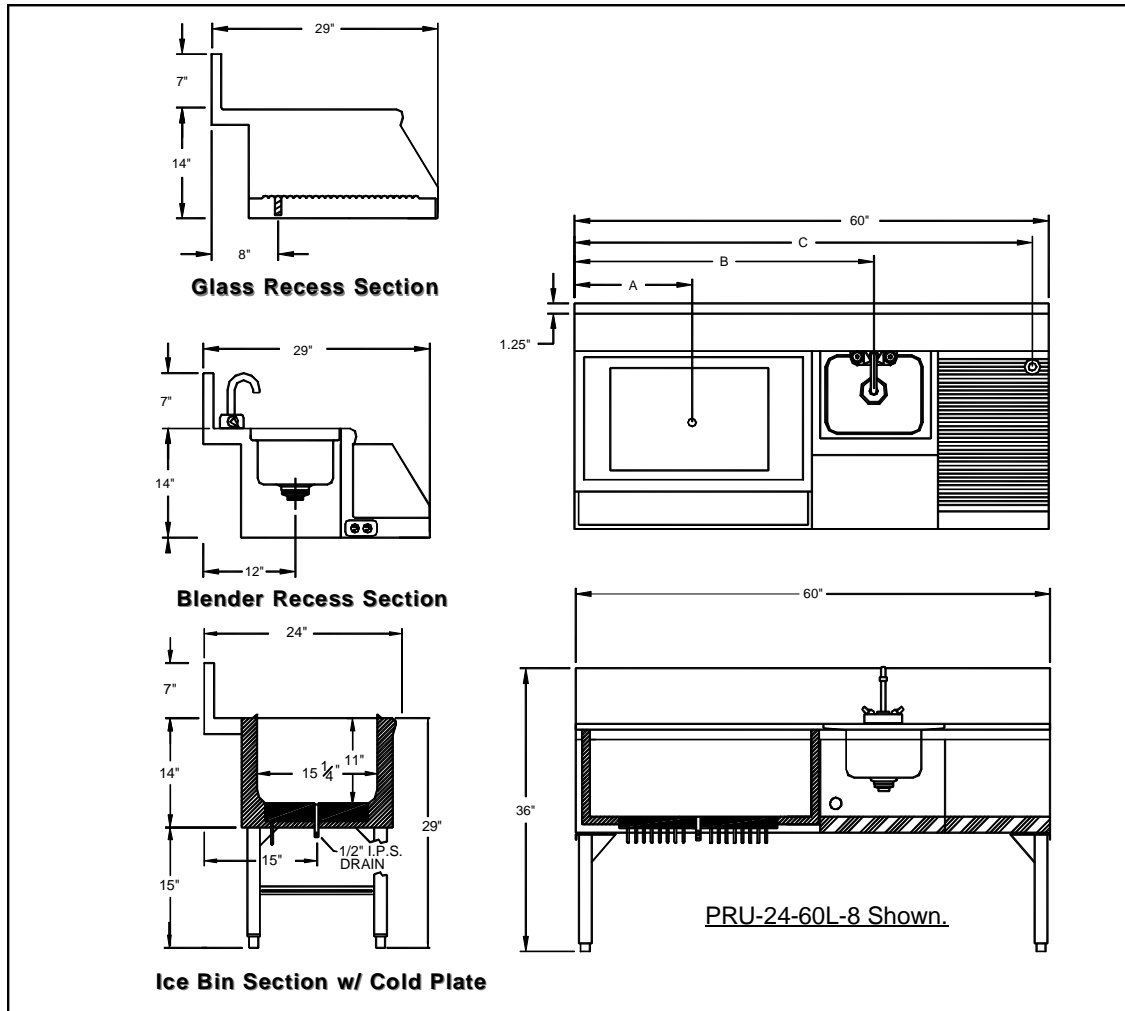

| Model Number | Distance to Drain (A) | Distance to Drain (B) | Distance to Drain (C) | 8 Circuit Cold Plate | Packaged Weight | Cubic Feet |
|--------------|-----------------------|-----------------------|-----------------------|----------------------|-----------------|------------|
| PRU-24-60L | 15" | 38" | 57" | NO | 135 LBS. | 23 |
| PRU-24-60R | 15" | 38" | 57" | NO | 135 LBS. | 23 |
| PRU-24-60L-8 | 15" | 38" | 57" | YES | 170 LBS. | 23 |
| PRU-24-60R-8 | 15" | 38" | 57" | YES | 170 LBS. | 23 |

SupremeMetal is constantly engaged in a program of improving their products. We reserve the right to change our specifications without prior notice.