BUNN°

12 Cup Automatic Coffee Brewer with 4 or 6 Warmers

IIEM#		
PROJECT		

DATE



Model CWTF 4/2 Twin

(decanters sold separately) Dimensions: 19.3" H x 16.5" W x 19.8" D (49cm H x 41.9cm W x 50.3cm D)

Features

12 Cup Automatic Coffee Brewer

- · Medium volume, twin brew head systems.
- Brews 15 gallons (56.8 liters) of perfect coffee per hour.
- Four or six individually controlled warming stations.
- · All stainless steel construction.
- · Includes hot water faucet.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQ-17-TL

Product No.: 30200.1000

Dimensions:

 $12^{7}\!\!/_{16}$ " H x $2^{1}\!\!/_{2}$ " W x 3" D $31.6\ \mathsf{cm}\ \mathsf{H}\ x\ 6.35\ \mathsf{cm}\ \mathsf{W}\ x\ 7.62\ \mathsf{cm}\ \mathsf{D}$

Easy Clear® ED-17-TL

Product No.: 30201.1001 Dimensions: $8\frac{1}{4}$ " H x $2\frac{5}{16}$ " Dia.

20.95 cm H x 5.87 cm Dia.



Paper Filter Pack

Product No.: 20115.0000 Packed per case: 1,000

Dimensions: $4\frac{1}{4}$ " Base x $2\frac{3}{4}$ " Sidewall 10.8 cm Base x 6.98 cm Sidewall

Easy Pour® black decanter Product No.: 06100.0101

Quantity: 1 (also packaged in

quantities of 2, 3, 6, 12, & 24)




1GPR SS Portable Server on an RWS1 Warmer

1GPR Product No.: 12487.00013 RWS1 Product No.: 12203.0010 *Also available with side handles

or black decor.

RWS1A Product No.: 12203.0011



Product No.: 06101.0101 Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



Model	Agency Listing	International Model	Agency Listing
CWTF 2/2 Twin	UL (NSF)	No International model	
CWTF 4/2 Twin			


Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity		Shipping Weight	Cord Attached
CWTF 2/2 Twin	23400.0001	120/240	27.7	2 @ 3000	6650	15 gal./hr.	6.4	56 lbs. (25.4 kg)	No
CWTF 4/2 Twin	23400.0011	120/240	28.5	2 @ 3000	6850	15 gal./hr.	6.4	56 lbs. (25.4 kg)	No

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Model requires 3-wires plus ground service rated 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with $\frac{3}{8}$ male flare fitting.

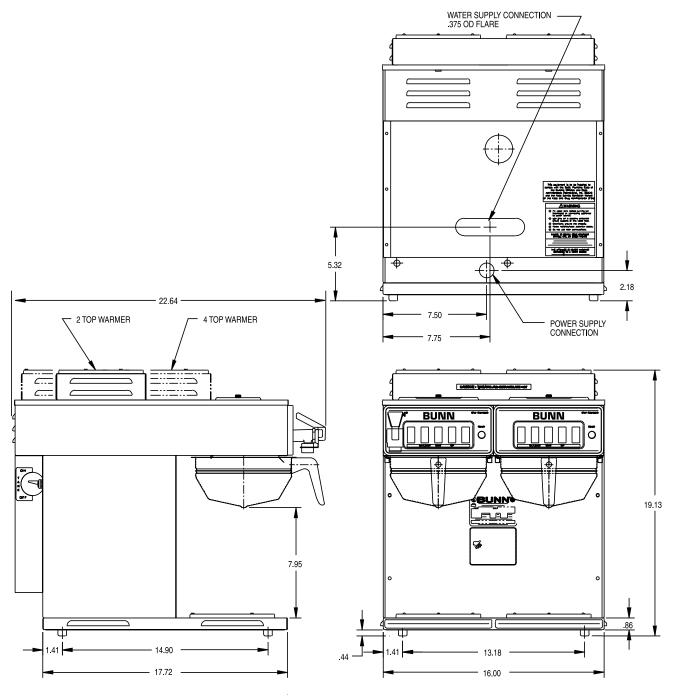

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com