

BUNN®

Easy Clear® Quick Connect (EQ) 10" or 14" Systems

ITEM#

PROJECT

DATE



Model EQ-11-TL & EQ-12-TL
Water Quality Systems

Features

Quick Connect 10" (EQ-11-TL) & 14" (EQ-12-TL) Water Quality Systems

- Provides 4,800 gallons @ 1.5 gpm (10") or 12,600 gallons @ 1.67 gpm (14") for superior sediment, taste/odor and chlorine reduction.
- Can be mounted in any position; has quick change filter head for easy cartridge replacement.
- Auto shut-off.
- 5 micron graded density filtration for 10" and 1 micron graded density filtration for 14".
- Perfect for beverage systems with a medium sized brewer (up to 50 lbs. of coffee/week).
- Provides six months of scale reduction and protects equipment from corrosion.
- Designed for minimum purge after cartridge change.
- Single purpose cartridges also available for treatment of problems with taste and odor (T), lime scale (L), hardness (H) and sediment filtration (S).

For current specification sheets and other information, go to www.bunn.com.

Related Products

Warranty: BUNN warrants the Easy Clear® hardware (excluding cartridges) to be free from defects in materials and workmanship for 1 year from the date of installation. See service manual for complete warranty statement.

EASY CLEAR®

System Tested and Certified by NSF International against ANSI/NSF Standard 42 for the reduction of sediment, taste/odor, and chlorine.

Gauge Kit for Quick Connect systems
Product No. : 30236.1000



Model	Agency Listing	International Model	Agency Listing
EQ-11-TL	NSF	No International Model	
EQ-12-TL	NSF		

Patents Apply

5/04

F2

Dimensions & Specifications

Model	Product #	Flow Rate & Capacity
-------	-----------	----------------------

Multipurpose Systems

EQ-11-TL	30344.1001	1.5 gpm/4,800 gals.
EQ-12-TL	30345.1001	1.67 gpm/12,600 gals.

10" Cartridges

EQ-TL-1	(1) 30331.1001	1.5 gpm/4,800 gals.
Case	(12) 30331.0001	
EQ-T-1	(1) 30331.1002	1.5 gpm/4,800 gals.
Case	(12) 30331.0002	
EQ-L-1	(1) 30331.1003	.75 gpm/NA
Case	(12) 30331.0003	
EQ-H-1	(1) 30331.1004	.5 gpm/900 grains [†]
Case	(12) 30331.0004	

14" Cartridges

EQ-TL-2	(1) 30332.1001	1.67 gpm/12,600 gals.
Case	(4) 30332.0001	
EQ-T-2	(1) 30332.1002	1.67 gpm/12,600 gals.
Case	(4) 30332.0002	
EQ-H-2	(1) 30332.1004	.5 gpm/1350 grains [†]
Case	(4) 30332.0004	

Manifolds

EQ-10	(1) 30321.1000	NA
EQ-21	(1) 30369.1000	NA
EQ-22	(1) 30325.1000	NA
EQ-32	(1) 30329.1000	NA


[†]To figure gallon capacity for an EQ-H-1 & 2 use the following formula: Grain capacity of cartridge ÷ water hardness (in grains) = gallons treated.

Note: EQ models includes inlet and outlet valves with $\frac{3}{8}$ " female pipe threading plus mounting bracket.

Applications For EQ Systems

TL	Sediment, Taste/Odor & Lime Scale
T	Taste & Odor (Carbon)
L	Lime Scale (Scale Inhibitor)
H	Hardness Treatment (Water Softener)
S	Sediment Filtration

Chlorine	Taste	Scale	Sediment	Softener
•	•	•	•	
•	•	•	•	
•	•	•	•	
•	•		•	
		•	•	
		•	•	•
•	•	•	•	
•	•		•	
		•	•	•

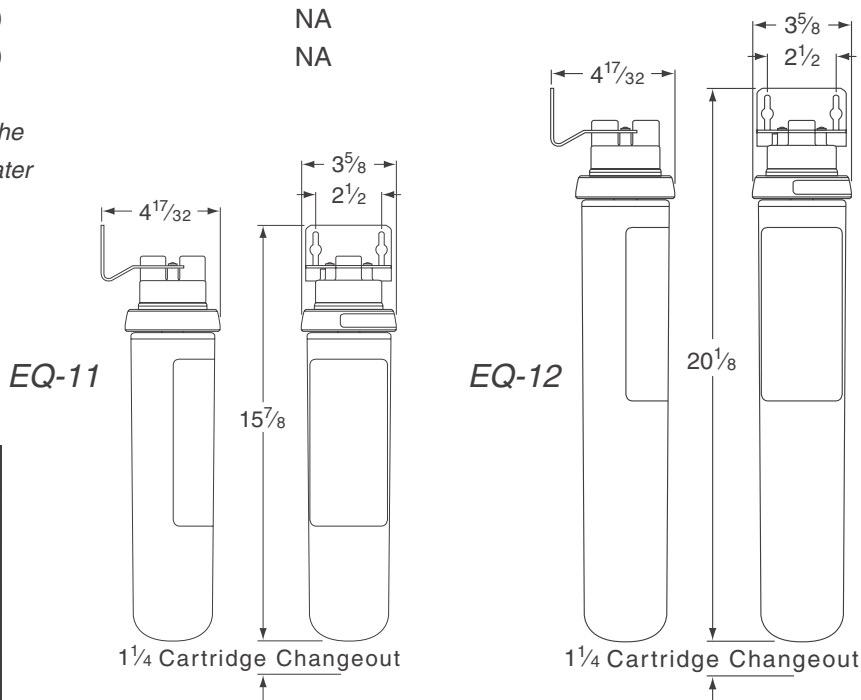

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.