
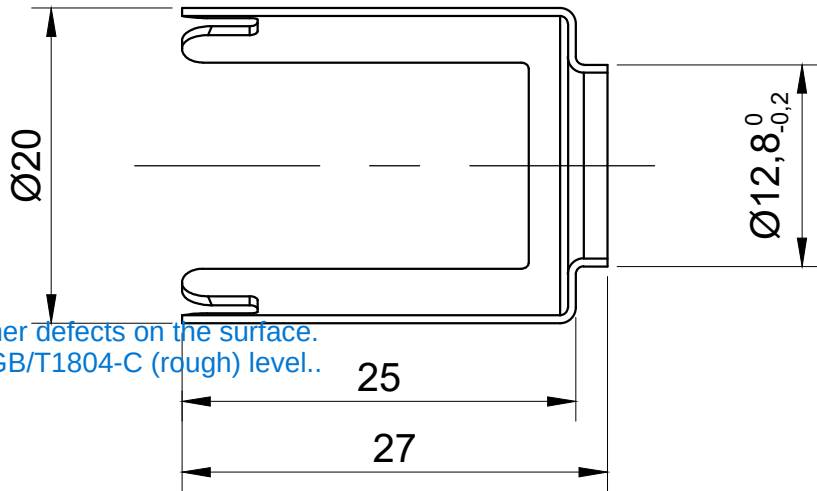
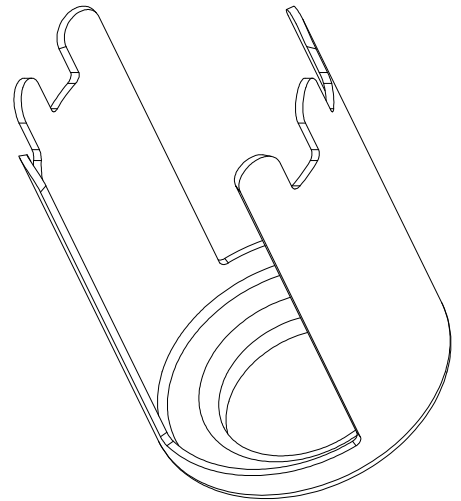
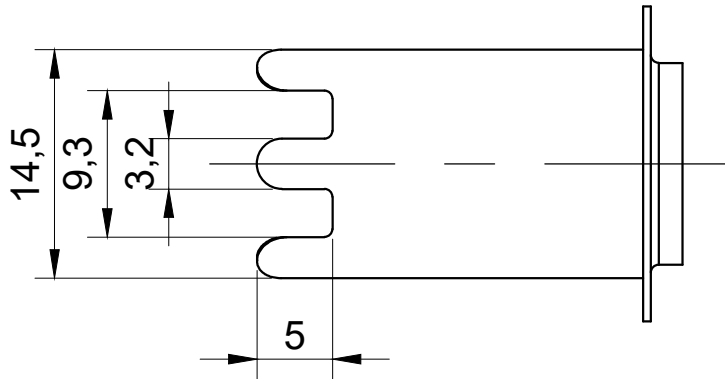


SPECIAL CHARACTERISTICS / 特殊特性	
SYMBOL / 符号	NOMENCLATURE / 命名法
☆	FIT/FUNCTION / 配合、功能尺寸
*	CRITICAL DIMENSION / 关键尺寸

TOLERANCE / 公差标准 (GB/T 1804-2000-C)			
DIM	TOL	DIM	TOL
<6	±0.3	>120~400	±1.2
>6~30	±0.5	>400~1000	±2
>30~120	±0.8	AUGULAR	±1.0°

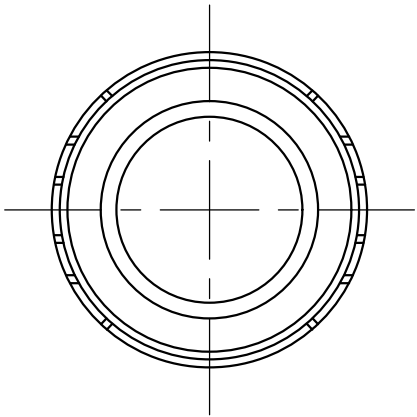

Technical requirements

- 1: Not note chamfering place R0.5
- 2: There must be no rust, scratches, bumps, burrs or other defects on the surface.
- 3: Dimensional tolerances not noted shall be based on GB/T1804-C (rough) level..

技术要求

- 1: 未注倒角R0.5
- 2: 表面不得有生锈、划伤、磕碰、毛刺等缺陷
- 3: 未注尺寸公差按GB/T1804-C（粗糙）级执行。

CHANGE/变更内容
NO.第 页 OF共 页

BUSIDN

RUIAN KING FILTERS AUTO PARTS CO., LTD

TITLE 零件名称	旁通阀体	QTY 数量	1PC	SCALE 比例	1:1	REV. 版本	00
PART NO. 零件编号	/	COLOR 颜色	本色	UNIT 单位	MM		
KF NO. KF编号		MATL 材质	SGCC*0.5	SIZE 图框	A4		
DESIGNED 制图		CHK BY 审核		APPR BY 批准			