

AQUA SAVER™ / MAXWELL® TOILETS WITH BALLCOCK

DIRECTIONS FOR TANK TO BOWL ASSEMBLY

For tank models 28-490, 28-492, 28-494, 28-790, 28-792, 28-794, 28-795

This water closet has been designed for easy installation. Conventional fittings have been used throughout so that the working parts and operation of this assembly may be easily understood.

1. Before assembling tank (B) to bowl (K) check tightness of lock nuts on both flush valve and fill valve.
2. Assemble tank bolts (D) in tank with rubber washers (E) and plastic wing nuts (F). Wing nuts should be tightened by hand sufficiently to compress rubber washers and insure water seal.
3. Assemble bevel washer (G) to flush valve shank so that lock nut is enclosed in recess, making sure that the entire surface of the washer is in contact with the tank bottom.
4. Place two channel pads (H) in recesses on back of bowl ledge to prevent china-to-china contact.
5. Place tank assembly in position. All parts are supplied. **USE NO PUTTY.** Plastic wing nuts (F) are tightened by hand sufficiently to prevent rocking; and since the tank bolts are already sealed, the tank can be leveled by the relative amount that each wing nut is pulled down on the three points of contact... beveled washer (G) and two channel pads (H).
6. Plastic bolt caps and washers (J) are provided to be used as indicated in the illustration.
7. The ballcock coupling nut (I) is provided to connect the water supply line to the fill valve. **USE NO PIPE DOPE! HAND TIGHTEN ONLY!** ***OVERTIGHTENING MAY SPLIT THE BALLCOCK AND WILL VOID THE WARRANTY!***
8. Adjust water level in tank to marked water line by adjusting water level screw.
9. Make sure refill tube is inserted into overflow tube.
10. Check action and nut tightness (left hand thread) of tank lever (C). Also, check looseness of chain (there should be slight slack in chain when at rest) and seal of flush valve flapper.

DO NOT EXPOSE PLASTIC TRIM PARTS TO STRONG OXIDIZING AGENTS, CHLORINE, OR ACID LEVELS OF LOWER THAN 5.0 pH. SOME BOWL/TILE CLEANERS CONTAIN SUCH AGENTS.



TANK TYPE BOWL CLEANERS CAN CAUSE TANK COMPONENT FAILURE AND DAMAGE. OUR WARRANTY EXCLUDES SUCH FAILURES.

GERBER.

PROFESSIONAL PERFORMANCE

www.gerberonline.com

AQUA SAVER™ and Maxwell® are trademarks of GERBER Plumbing Fixtures LLC.
PN 8045, rev. 02-08

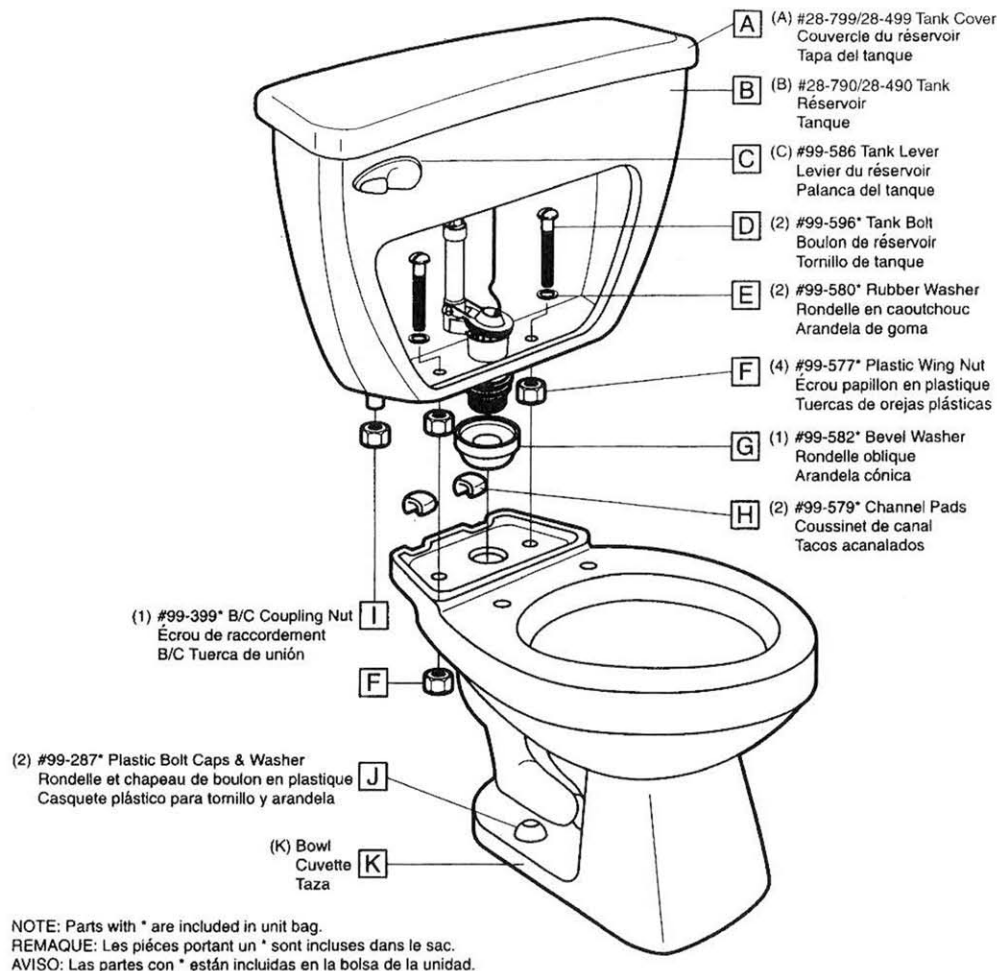

Flapper Assembly Replaced by 99-648
L'étancheité Du Clapet
Asamblea De Flotador

