


PRODUCT DATA SHEET

**Product Description:** Grab bar mounting brackets, fabricated from 304 stainless steel with US32D satin stainless steel finish. Use to install with Harney Hardware grab bars only (sold separately). Hold maximum 350 lbs on ASTM C 1396 standard 5/8" thick sheetrock or sheetrock substrate. Minimum void space behind sheetrock or sheetrock substrate shall be no less than 3 1/2". Wood studs to which the sheetrock or sheetrock substrate is affixed shall be solid, non-deteriorated pine or harder wood with minimum dimensions of 1 1/2" thick by 3 1/2" wide. Center to center distance between wood studs shall be a minimum of 16". Fasteners used to affix sheetrock or sheetrock substrate shall be bungle head, course thread, #8, 2" or longer sheetrock screws. Minimum distance between fasteners used to affix sheetrock to wood studs shall not be less than 8". 1 1/2" hole needs to be drilled on the sheetrock. To allow for appropriate mounting bracket clearance holes drilled must be a minimum of 3" from the center of structural wall studs. All mounting hardware included. For residential use only. For commercial use, please call 800-942-7639.



Overall Size: 1" W X 1" H X 1" D	
Material: 304 Stainless Steel	
Finish: US32D Satin Stainless Steel	
Cross Reference	
Manufacturer	Part Number

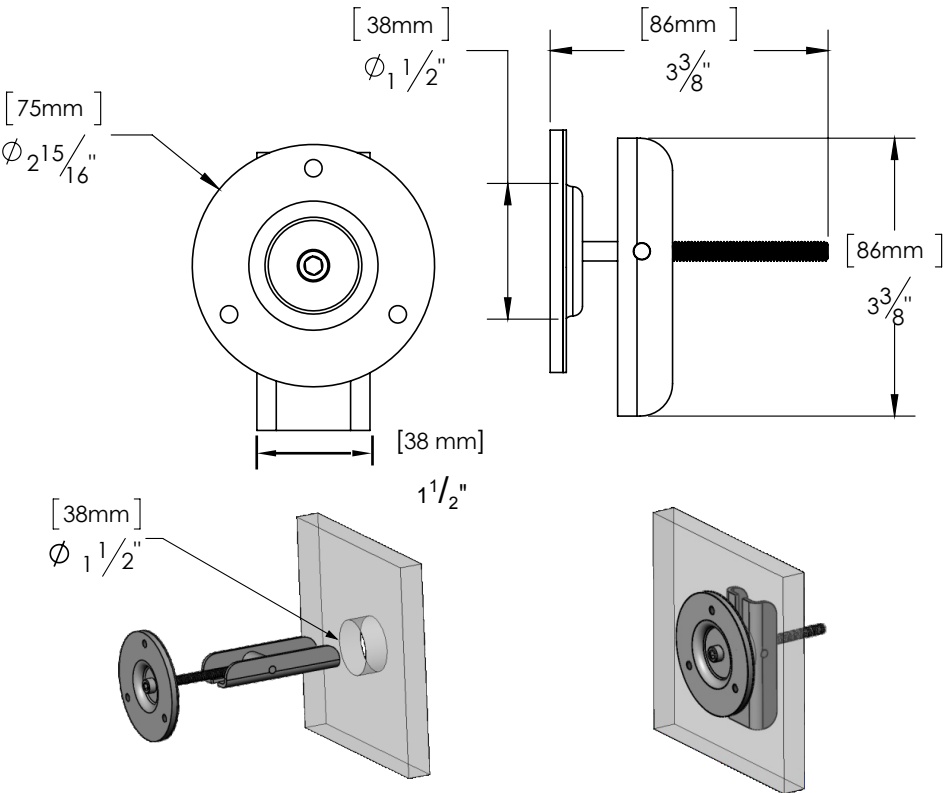

Description: <b>Grab Bar Mounting Brackets</b>		
Part Number:	Date	Rev.
<b>71832</b>		
Sheet 1 of 1		