

## PRODUCT DATA SHEET

Product Description: ANSI Grade 2 commercial door exit lock. Removable, non-interchangeable core. Handle is fabricated from zinc and escutcheon is fabricated from stainless steel in a US10B oil rubbed bronze finish. There is no outside lever. The inside lever is always unlocked providing emergency exit. Full length lever handle with 3/8" return. ADA compliant. UL10C 3 hour fire rated. Ships with mounting hardware. 2 3/8" latch (product #CLB60MM) sold separately.

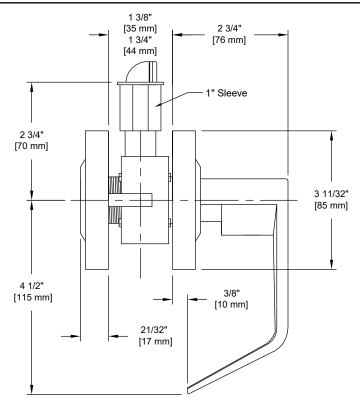



Door Prep: Cross Bore 2 1/8", Edge Bore 1", Latch Face 1 1/8" x 2 1/4"

**Backset:** 2 3/4"

Door Thickness: Standard Doors 1 3/8" to 1 3/4"

Strike Plate: 4 7/8", 3 3/8" Lip Strike Bolt: 1/2" Throw, Stainless Steel ANSI/BHMA: A156.2 Grade 2







Overall Size: 5 3/16" W X 3 11/32" H X 2 3/4" D

Material: Zinc Handles, Stainless Steel Escutcheon

Finish: US10B Oil Rubbed Bronze

Cross	Reference

Manufacturer	Part Number
CalËoyal	XP50





Lock Lever, Exit /Connecting RM, SAT Style Handle, UL10C, **ANSI Grade 2** 

Part Number:

86531

10/23	Rev. <b>03</b>
Sheet 1	of 1