


PRODUCT DATA SHEET

Product Description: Dead bolt door lock, double cylinder. ANSI Grade 3 dead bolt with a Kwikset KW1 solid brass keyway. Escutcheons are brass with a US15 satin nickel finish. Internal mechanism fabricated from hardened steel with a zinc dichromate corrosion preventive finish. Key opens outside and inside. Ships with mounting hardware. Lock ships with mortise latch. Optional drive in latch (product #87396) and UL10C fire rated latch (product #87374) available.

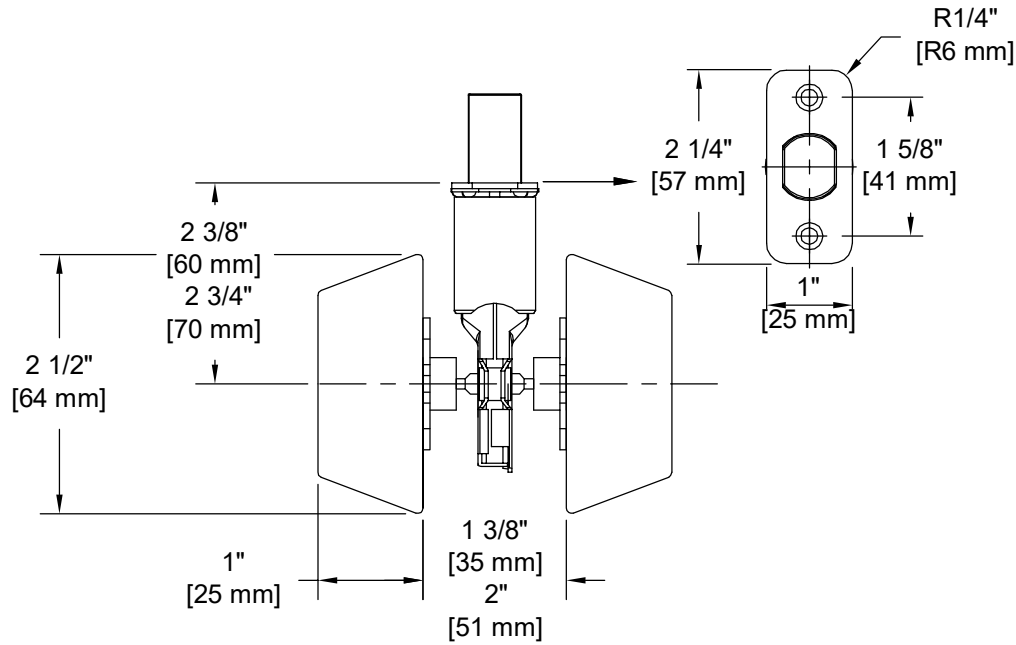

Door Prep: Cross Bore 2 1/8", Edge Bore 1", Mortise Latch Face 1" x 2 1/4", Optional Drive In Latch 1" Diameter Drilled Hole

Latches: Ships With Mortise Latch As Shown Above. Optional Drive In Or UL10C Fire Rated Latches Available

Backset: Adjustable Latch to 2 3/8" or 2 3/4"

Door Thickness: Fit all 1 3/8" - 1 3/4" Standard Doors

Cylinder: Brass with Nickel Plated Brass Keys and 5 Pin Tumbler Kwikset KW1 Keyway

Strike Plate: 2 1/4" Full Lip Strike

Bolt: 1" Throw

REKEY OPTIONAL



Overall Size: 2 1/2" W X 2 1/2" H X 1" D

Material: Brass Escutcheons, Hardened Steel Mechanism

Finish: US15 Satin Nickel

Cross Reference

Manufacturer	Part Number
Pamex, Inc.	FD22



Description:

Dead Bolt, Double Cylinder, Premier Series, KW1, ANSI Grade 3

Part Number:

87350

Date

10/23

Rev.

05

Sheet 1 of 1