

## PRODUCT DATA SHEET

Product Description: Box of 2, Flat panel ceiling light, integrated LED, 12" wide, 48" long. ETL listed for use in both dry and damp locations. Integrated LED module, 50,000 hour lifespan, 3 CCT (Correlated Color Temperature) selectable color choices: 3,000K, 4,000K and 5,000K, 80 CRI (Color Rendering Index), 40 watts, 3,800 lumens, 120 volts, dimmable. Frame fabricated from aluminum with acrylic lens with US15 satin nickel finish. Mounting hardware included. We recommend a licensed electrician to install all lighting fixtures.

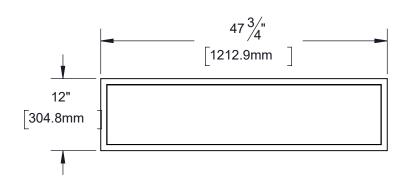



**Location Rating: Bulb Type:** Volt: Color Rendering Index (CRI) **Dry And Damp Locations** Intergrated LED 18W 120-277 Volts 80+ CRI

Correlated Color Temperature (CCT): 3,000K, 4,000K, 5,000K Selectable

Watts 40 Watts Lumens: 3.800 Lumens Dimmable: Yes

Life Span: Certification:

50,000 Hours ETL

Overall Size: 47 3/4" W X 12" H X 1 1/2" D

Material: Aluminum Frame And Acrylic Lens

Finish: US15 Satin Nickel

| _      |      |       |
|--------|------|-------|
| C      | D-f- | rence |
| I rnee | RATE | rence |

| Manufacturer | Part Number |  |
|--------------|-------------|--|
|              |             |  |





Flat Panel Ceiling Light, Integrated LED, 12 In. Wide X 48 In. Long, 2 Box

FP124815

| Date    | Rev. |
|---------|------|
| 03/24   | 00   |
| Sheet 1 | of 1 |