


PRODUCT DATA SHEET


Product Description: Panic exit device, for 28" to 42" wide doors. UL10C 3 hour fire rated, ANSI A156.3 Grade 1. Non handed. Rail and push pad are fabricated from heavy gauge steel with a duranodic bronze finish. Trim available in the following functions: classroom, storeroom, passage and dummy. Device and trim for 161 standard cut out. Mounting hardware and 239 strike included. ADA compliant.

Designed For 161 Cut Out **Door Prep**

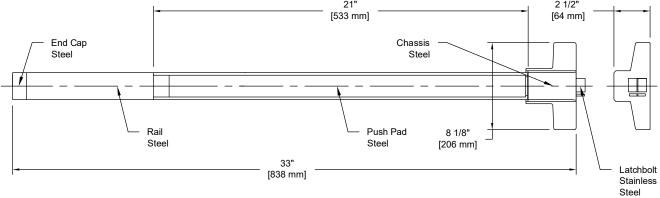







Door Thickness: Standard Doors 1 3/4" to 2 1/4"

Latch Bolt: Stainless Steel 3/4" Throw

Strike: 239 Standard

ANSI/BHMA: Exit Device: A156.3 Grade 1









Overall Size: 33" W X 8 1/8" H X 2 1/2" D

Material: Steel, Cast Iron, Stainless Steel

Finish: Duranodic Bronze

Cross Refer	ence
cturer	Part Number
YAL	F6600EO3

Manufacturer	Part Number
CAL-ROYAL	F6600EO36
CORBIN/RUSSWIN	ED8200A
DORMA	F8300
VON DUPRIN	22EO-F
YALE	2100

Crasa Deference





Panic Exit Device, Fire Rated, 32", UL10C, ANSI **Grade 1**

PE550036FPB

Date	Rev.
10/23	กว
10/23	00
Sheet 1 of 1	