

INSTALLATION INSTRUCTIONS

Flush Mount Ceiling Light

Model	Watt	Input Voltage
QK-CL9-8-W/B	20W	120Vac 60Hz
QK-CL12-8-W/B	25W	120Vac 60Hz
QK-CL16-8-W/B	35W	120Vac 60Hz


TOOLS REQUIRED

- Screw driver
- Wire stripper
- Voltage tester

INSTALLATION STEPS


1. Power Off

Turn off power at the circuit breaker or fuse box.



3. Mount the Bracket

Secure the bracket to the ceiling using the provided mounting screws.

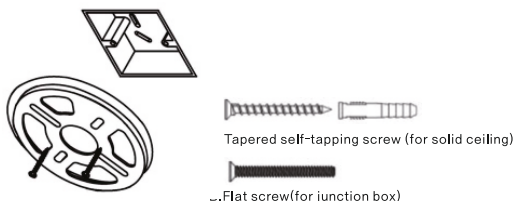

5. Make Electrical Connections

(Connect the light to a 120V 60Hz power supply)

- Connect the black fixture wire to the live (black) supply wire.
 - Connect the white fixture wire to the neutral (white) supply wire.
- IMPORTANT: Use UL/CSA-approved wire connectors and ensure all connections are secure.

6. Secure the Fixture

- Align the light body with the bracket and rotate it clockwise to lock it into place.



MAINTENANCE

- Turn off power before cleaning or servicing the luminaire
- Clean with a dry or damp soft cloth. Do not use solvents or abrasive cleaners.
- Periodically inspect wiring and connections to ensure continued safe operation.



IMPORTANT SAFETY INFORMATION


- WARNING: Risk of Fire or Electric Shock
- Installation must be performed by a licensed electrician.
- Disconnect power at the circuit breaker before installation or maintenance.
- Installation must comply with the latest edition of the Canadian Electrical Code (CSA c22.1), as well as all applicable provincial, territorial, and local electrical codes and regulations.

PACKAGE CONTENTS

- Ceiling light
- Hanger plate
- Mounting screws
- Wire connectors
- Installation manual


2. Remove the Bracket

Unscrew the bracket from the light body by rotating it counterclockwise.

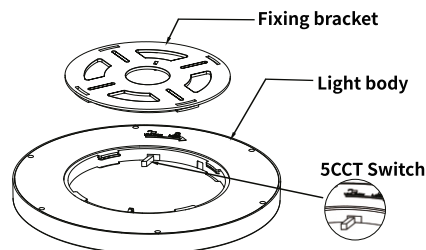


4. Connect the Safety Rope

Attach the safety rope from the light body to the bracket.

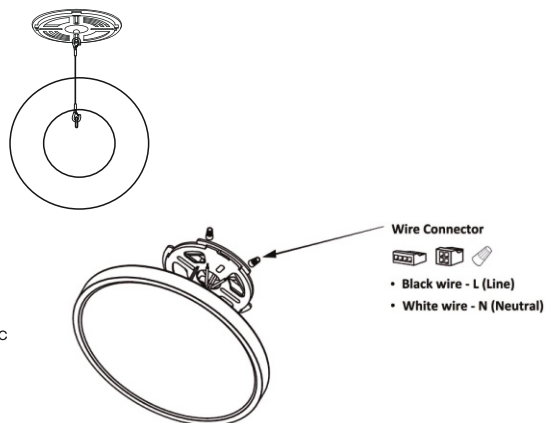

7. Restore Power

- Turn the circuit breaker back on and test the fixture



NOTES

- For indoor use only.
- Suitable for damp locations
- Do not install in wet locations unless the fixture is specifically rated for wet conditions.
- This product is intended for permanent installation only.