

BigFix Platform Installation Guide



Special notice

Before using this information and the product it supports, read the information in [Notices \(on page 525\)](#).

Edition notice

This edition applies to version 9.5 of BigFix and to all subsequent releases and modifications until otherwise indicated in new editions.

Contents

Chapter 1. Introduction.....	1
What is new in V9.5.....	2
Architectural components overview.....	26
Chapter 2. BigFix Platform Unicode Support Overview.....	29
Masthead encoding parameters.....	30
Top-down data flow: from the BigFix server to the clients.....	30
Bottom-up data flow: from BigFix clients to BigFix server.....	31
Unicode support requirements and limitations.....	32
Reading and writing files in the specific encodings.....	37
Background information.....	37
Reading file inspectors.....	38
Writing file with the encode command.....	40
Reading and writing files with encode.....	42
Managing actions on clients with different local encoding.....	43
Chapter 3. Sample deployment scenarios.....	44
Basic deployment.....	44
Main Office with Fast-WAN Satellites.....	47
Disaster Server Architecture.....	49
Efficient relay setup.....	51
Hub and spoke.....	53
Remote Citrix / Terminal Services Configuration.....	56
Chapter 4. Requirements and assumptions.....	59
Server requirements.....	59

Console requirements.....	61
Client requirements.....	61
Database requirements.....	64
Security requirements.....	68
Network configuration requirements.....	70
Assumptions.....	72
Chapter 5. Types of installation.....	74
Evaluation installation.....	74
Production installation.....	75
Moving from evaluation installation to production installation.....	75
Chapter 6. Managing licenses.....	79
Creating the License Authorization File.....	82
Licensing Assistance.....	82
Extending the license entitlements.....	82
Distributing the Updated License and Masthead.....	84
Distributing the masthead from the Windows server to clients.....	85
Distributing the masthead from the Linux server to the clients.....	88
Chapter 7. Before installing.....	89
Configuring a Local Firewall.....	89
Modifying port numbers.....	89
Understanding the server components.....	90
Chapter 8. Installing on Windows systems.....	92
Step 1 - Downloading BigFix.....	92
Performing an evaluation installation.....	93
Step 2 - Requesting a license and creating the masthead.....	101

Installing the components.....	112
Managing the Server ID limit.....	113
Installing the Windows primary server.....	113
Installing the Client on Windows.....	137
Installing the console.....	137
Installing a stand-alone Web Reports server.....	137
Installing the WebUI.....	143
Removing the Product Components on Windows systems.....	148
DSA on Windows.....	149
Installing Additional Windows Servers (DSA).....	149
Authenticating Additional Servers.....	153
Uninstalling a Windows replication server.....	155
Chapter 9. Installing on Linux systems.....	157
Installing and configuring DB2.....	157
Downloading BigFix.....	160
Performing an evaluation installation on Linux.....	162
Installation Command Options.....	165
Installing the components.....	166
Installing the Server.....	166
Installing Web Reports Standalone.....	186
Installing the WebUI Standalone.....	192
Verifying Server Installation.....	195
Silent installation.....	196
Installing the Client on Linux.....	212
Installing the Console.....	212

Installation Folder Structure.....	213
Configuration, Masthead, and Log Files.....	216
Managing the BigFix Services.....	217
Changing the database password.....	218
Changing the DB2 port.....	220
Removing the Product Components on Linux systems.....	221
DSA on Linux.....	222
Installing Additional Linux Servers (DSA).....	222
Authenticating Additional Servers (DSA).....	224
Uninstalling a Linux replication server.....	225
Chapter 10. Installing the clients.....	227
Using the Client Deploy Tool.....	227
Target prerequisites.....	227
Client Deploy Tool wizard.....	229
Client Deploy Tool Fixlet.....	236
Troubleshooting the client deployment.....	240
Log files.....	243
Uploading the target logs to the server.....	245
Limitations.....	246
Installing the Client on AIX.....	246
AIX Fixlet Content.....	248
Installing the Client on Linux.....	248
Amazon Linux 2 Installation Instructions.....	249
CentOS Installation Instructions.....	250
Oracle Linux Installation Instructions.....	251

Raspbian Installation Instructions.....	252
Red Hat Installation Instructions.....	253
SUSE Linux Enterprise (64-bit) Installation Instructions.....	257
Ubuntu/Debian (32-bit) Installation Instructions.....	258
Ubuntu/Debian (64-bit) Installation Instructions.....	259
Installing the Client on Mac.....	259
Mac Fixlet Content.....	260
Installing the Client on Solaris 10.....	261
Solaris Fixlet Content.....	263
Installing the Client on Solaris 11.....	263
ESX Fixlet Content.....	268
Installing the Client on Windows.....	268
Installing the Client using the .exe setup.....	269
Installing the Client using the .msi setup.....	271
Embedding in a Common Build.....	276
Avoiding duplicates when a Client is restored.....	277
Enabling encryption on Clients.....	279
Chapter 11. BigFix Administration Tool.....	281
BESAdmin Windows GUI.....	281
Masthead Management.....	281
System Options.....	282
Advanced Options.....	283
Replication.....	284
Encryption.....	285
Security.....	285

Computer Remover.....	288
Audit Trail Cleaner.....	292
Property ID Mapper.....	297
BESAdmin Windows Command Line.....	299
Working with TLS cipher lists.....	319
BESAdmin Linux Command Line.....	321
Working with TLS cipher lists.....	347
Logging Cleanup Tasks Activities.....	350
Chapter 12. Post-installation configuration steps.....	352
Post-installation steps.....	352
Starting and stopping the BigFix server.....	357
Subscribing to content sites.....	359
Chapter 13. Managing relays.....	361
Relay requirements and recommendations.....	362
Setting up a relay.....	363
Installing and upgrading a relay from the command line.....	364
Assigning relays to clients.....	365
Assigning relay at client installation time.....	365
Manually assigning relays to existing clients.....	370
Automatically assigning relays at client installation time.....	371
Automatically assigning relays to existing clients.....	371
Using relay affiliation.....	372
Notes about automatic relay assignment.....	374
Adjusting the BigFix Server and Relays.....	374
Assigning a relay when the server is unreachable.....	376

Setting up internet relays.....	376
Viewing which relay is assigned to a client.....	381
Viewing the relay chain on the client.....	381
Chapter 14. Introduction to Tiny Core Linux - BigFix Virtual Relay.....	386
Architectural overview.....	386
Phase 1 - Configuring the Tiny Core Linux virtual machine.....	388
Downloading the ISO image.....	388
Creating a virtual machine.....	388
Installing Tiny Core Linux on the virtual machine.....	389
Phase 2 - Preparing the BigFix Virtual Relay template.....	396
Template setup and customization from a local folder.....	398
Template setup and customization from the network.....	401
Creating the BigFix Virtual Relay template.....	406
Phase 3 - Configuring the BigFix Virtual Relay instance.....	406
Deploying a new BigFix Virtual Relay instance by using Auto-Deployment.....	406
Manually deploying a new BigFix Virtual Relay instance.....	408
Maintenance.....	411
Troubleshooting.....	414
Limitations.....	414
VMware and Open VM tools.....	414
Auto-Deployment.....	416
Modifying the Virtual Relay template.....	417
Chapter 15. Setting up a proxy connection.....	420
Enabling client polling.....	425
Connecting the console to the server through a proxy.....	426

Setting a proxy connection on the server.....	427
Setting up a proxy connection on a relay.....	432
Setting up a proxy connection on a client.....	436
Best practices to consider when defining a proxy connection.....	441
Troubleshooting proxy connection.....	443
Error Unable to get site content (failed to pass sha1 hash value checks in BESRelay.log.....	443
Error Unexpected HTTP response: 503 Service Unavailable in GatherDB.log.....	444
How to check if the proxy configuration is correct.....	444
New site version cannot be gathered.....	446
Chapter 16. Running backup and restore.....	448
On Windows systems.....	449
Server Backup.....	449
Server Recovery.....	451
Verifying restore results.....	453
DSA Recovery.....	454
On Linux systems.....	457
Server Backup.....	457
Server Recovery.....	459
Verifying restore results.....	461
Enabling the DB2 database online backup.....	462
DSA Recovery.....	463
Chapter 17. Upgrading on Windows systems.....	466
BigFix client backward compatibility.....	467
Upgrade paths to V9.5.....	468

Before upgrading.....	469
Upgrade prerequisite checks.....	471
Automatic upgrade.....	473
Manual upgrade.....	473
Upgrading the installation generator.....	473
Upgrading the server.....	474
Upgrading the Console.....	476
Upgrading the WebUI.....	477
Upgrading the relays.....	478
Upgrading the clients.....	478
Upgrading the Web Reports server.....	478
Rollback.....	478
Chapter 18. Upgrading on Linux systems.....	480
BigFix client backward compatibility.....	481
Upgrade paths to V9.5.....	482
Automatic databases backup upon upgrade.....	483
Troubleshooting the automatic databases backup feature.....	485
Disabling the automatic databases backup feature.....	485
Before upgrading.....	485
Upgrade prerequisite checks.....	487
Automatic upgrade.....	489
Manual upgrade.....	489
Upgrading the server.....	489
Upgrading the Console.....	491
Upgrading the relays.....	491

Upgrading the clients.....	492
Upgrading the Web Reports and WebUI standalone servers.....	492
Rollback.....	493
Chapter 19. Known limitations and workarounds.....	494
Appendix A. Logging.....	495
Appendix B. Uninstalling the BigFix client.....	500
Uninstalling the BigFix Client on AIX.....	500
Uninstalling the BigFix Client on Linux.....	502
Uninstalling the BigFix Client on Solaris.....	503
Uninstalling the BigFix Client on Mac.....	505
Appendix C. Glossary.....	506
Appendix D. Support.....	520
Appendix E. Accessibility features for BigFix.....	521
Notices.....	525
Index.....	

Chapter 1. Introduction

BigFix aims to solve the increasingly complex problem of keeping your critical systems updated, compatible, and free of security issues. It uses patented Fixlet technology to identify vulnerable computers in your enterprise. With just a few mouse-clicks you can remediate them across your entire network from a central console.

Fixlets are powerful, flexible, and easily customized. Using Fixlet technology, you can:

- Analyze vulnerabilities (patched or insecure configurations)
- Easily and automatically remediate all your networked endpoints
- Establish and enforce configuration policies across your entire network
- Distribute and update software packages
- View, modify, and audit properties of your networked client computers

Fixlet technology allows you to analyze the status of configurations, vulnerabilities, and inventories across your entire enterprise and then enforce policies automatically in near realtime. In addition, administrators can create or customize their own Fixlet solutions and tasks to suit their specific network needs.

BigFix is easy to install and has built-in public and private-key encryption technology to ensure the authenticity of Fixlets and actions. It grants you maximum power as the administrator, with a minimal impact on network traffic and computer resources. BigFix can handle hundreds of thousands of computers in networks spanning the globe.

When installed, you can easily keep your networked computers correctly configured, updated, and patched, all from a central console. You can track the progress of each computer as updates or configuration policies are applied, making it easy to see the level of compliance across your entire enterprise. In addition to downloads and security patches, you can also examine your managed computers by specific attributes, allowing you to group them for action deployments, ongoing policies, or asset management. You can log the results to keep an audit trail and chart your overall activity with a convenient web-based reporting program.

What is new in V9.5

BigFix Platform Version 9.5 provides new features and enhancements.

Patch 25:

Security vulnerabilities and library upgrades

- The libcurl library was upgraded to Version 8.6.0.

Patch 24:

Security vulnerabilities and library upgrades

- The libcurl library was upgraded to Version 8.5.0.

Patch 23:

Use “Microsoft Print to PDF” printer driver for exporting PDF reports in Web Reports

Starting from BigFix Platform 9.5.23, Web Reports can generate PDF reports using the “Microsoft Print to PDF” printer driver. BigFix recommends that you take advantage of this driver by running Task ID 5436. Refer to On Windows Systems for more information.

Security vulnerabilities and library upgrades

- The libcurl library was upgraded to Version 8.1.2.
- The OpenSSL library was upgraded to Version 1.0.2zh.
- The Xerces library was upgraded to Version 3.2.4.

Patch 22:

Security vulnerabilities and library upgrades

- The libcurl library was upgraded to Version 7.88.1.
- The OpenSSL library was upgraded to Version 1.0.2zg.

Patch 21:**Security vulnerabilities and library upgrades**

- The libcurl library was upgraded to Version 7.86.0.
- The JQuery UI library was upgraded to Version 1.13.2.
- The ICU library was upgraded to Version 54.2.

Patch 20:**Added support for BigFix Agent**

Added support for BigFix Agent running on Red Hat Enterprise Linux 9 x86 64-bit.

Library upgrades

- The libcurl library was upgraded to Version 7.83.1.

Patch 19:**Added support for BigFix Agent**

Added support for BigFix Agent running on:

- Windows Server 2022.
- Windows 11 21H2.
- Windows 11 22H2.

Added support for Active Directory 2016

Added support for Active Directory 2016 with Forest functional level Windows Server 2016 and Enterprise Certification Authority for BigFix Server running on Windows only.

Library upgrades

- The libcurl library was upgraded to Version 7.79.1.
- The OpenSSL library was upgraded to Version 1.0.2zd.

- The jQuery UI library was upgraded to Version 1.13.1.
- The zlib library was upgraded to Version 1.2.12.

Patch 18:

Security vulnerabilities and library upgrades

- The SQLite library was upgraded to Version 3.34.1.
- The OpenLDAP library was upgraded to Version 2.4.56.
- The OpenSSL library was upgraded to Version 1.0.2y.

Added support for BigFix Relay, Console and Agent

Added support for BigFix Relay, Console and Agent running on Windows 10 Version 22H2.

Added support for BigFix Relay, Console and Agent

Added support for BigFix Relay, Console and Agent running on Windows 10 Version 21H2.

Added support for BigFix Relay, Console and Agent

Added support for BigFix Relay, Console and Agent running on Windows 10 Version 21H1.

Added property to the operating system inspector

A new property named `display_version` was added to the `operating_system` inspector. This property returns the Windows operating system version and returns valid information only for Windows 10 20H2 and later Windows 10 versions.

Patch 17:

Library upgrades

The Curl library was upgraded to Version 7.73.0.

Added support for BigFix Server and Console

Added support for BigFix Server and Console running on Windows Server 2019.

Added support for BigFix Agent

Added support for BigFix Agent running on:

- MacOS 11 x86 64-bit.
- Windows 10 Enterprise for Virtual Desktops.



Note: For Windows 10 Enterprise for Virtual Desktops, the relevance expression "product info string of operating system" returns "Server RDSH".

Added support for new database levels

- DB2 Version 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition support.



Note: Ensure that you upgrade BigFix to Version 9.5 Patch 17 or higher, before upgrading DB2 11.5.0 to 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9.

- Microsoft SQL Server 2019 support.

New RPM package required

Note: Starting from Version 9.5 Patch 17, the unixODBC RPM package must be installed for the Server component on Linux systems.

Patch 16:

Security vulnerabilities and library upgrades

- The Codejock library was upgraded to Version 19.2.0.
- The YUI library was upgraded to Version 2.9.0.
- The Curl library was upgraded to Version 7.69.1.

Added support for BigFix Relay running on:

- Red Hat Enterprise Linux Version 8 x86 64-bit on Intel.
- CentOS 8 x86 64-bit.

Enhanced security of TLS connections with support of Diffie-Hellman (DHE) and ephemeral Elliptic Curve Diffie-Hellman (ECDHE)

BigFix Platform Version 9.5 Patch 16 HTTPS servers now allow ephemeral Diffie-Hellman (DHE) and ephemeral elliptic curve Diffie-Hellman (ECDHE) for key exchange while keep leveraging on RSA for authentication. With this feature, new, random asymmetric keys are chosen for each TLS connection that are never written to persistent storage. When the TLS connection terminates, keys are securely erased, ensuring in this way that, if an RSA private key is ever divulged, that key cannot be used to decrypt any secret exchanged during the TLS sessions.

Patch 15:

Security vulnerabilities and library upgrades

- The OpenSSL toolkit level was upgraded to Version 1.0.2u.

Added support for BigFix Agent

Added support for BigFix Agent running on Oracle Enterprise Linux 8 on Intel.

Patch 14:

Security vulnerabilities and library upgrades

- The libssh2 external library level was upgraded to Version 1.9.0.
- The OpenLDAP external library level was upgraded to Version 2.4.48.

Added support for new database levels

IBM DB2 Standard Edition Version 11.5 GA.

Added support for BigFix Relay

Added support for BigFix Relay running on Windows 10 Version 20H2.

Added support for BigFix Console

Added support for BigFix Console running on Windows 10 Version 2004 and Windows 10 Version 20H2.

Added support for BigFix Agent

Added support for BigFix Agent running on:

- SUSE Linux Enterprise 15 PPC 64-bit.
- Red Hat Enterprise Linux 8 x86 64-bit.
- Red Hat Enterprise Linux 8 PPC 64-bit LE on Power 8 and 9.
- Red Hat Enterprise Linux 8 on s390x.
- Ubuntu 18.04 LTS PPC 64-bit LE on Power 8.
- MacOS 10.15.
- Windows 10 Version 1909.
- Windows 10 Version 2004.
- Windows 10 Version 20H2.
- CentOS 8.



Note: On CentOS 8, the Client UI might fail to launch.

Patch 13:**Relays in DMZ**

You can configure parent relays outside a demilitarized zone (DMZ) to initiate connections to child relays that are within the DMZ network. This means that relay-to-relay communication is always initiated from the parent relay. You can use this feature to avoid opening firewall ports from the DMZ to the internal secure network which in turns helps toughen the security of your environment.

For details, see [Relays in DMZ](#).

Troubleshoot issues more efficiently by persisting the relay chain on the BigFix Client

The Relay chain is identified for each client and it consists of a set of Relays involved in the registration between the client and the server to which the client is registered. With this feature, you can allow the client to trace the relay chain for each registration and ensure that the relay information is available on the client side. This helps you troubleshoot issues related to client-to-server communications more efficiently, and improve the data reported by the BES Client Diagnostics task.

For details, see [Viewing the relay chain on the client \(on page 381\)](#).

Install BigFix agent with IPS format (.p5p package) on Solaris 11

On Solaris 11, the BigFix agent installation package is now available as IPS (Image Packaging System), which is the latest Solaris packaging technology. The old version of the installation package is also still available. You can therefore choose an installation option that best suits your requirements.

For details, see [Installing the Client on Solaris 11 \(on page 263\)](#).

Delete registry keys by using actionscript

You can now delete not just the values of the registry keys set on the clients, but the keys themselves as a whole by using actionscripts. This operation also has a 64-bit equivalent. This feature helps you maintain the Windows registry keys, for example by removing the keys that are no longer used.

For details, see [regkeydelete](#) and [regkeydelete64](#).

Removal of Adobe Flash Player dependency in Web Reports component

As a preparatory step to deal with end of support (EOS) of Adobe Flash Player in the year 2020, the Adobe Flash Player dependency was removed from the Web Reports functionality. However, your experience of viewing the graphs remains the same.

Run queries in client context

BigFix extends the ability of the Agent to run queries when submitted through the Fixlet Debugger or REST API. This allows you to run any relevance for tasks such as troubleshooting or investigations directly from these interfaces.

For details, see [BigFix Query](#).

Added support for BigFix Agent on Raspberry Pi

Added support for running Agent on Raspbian 9 and 10 Raspberry Pi 3 models B and B+.

For details, see [Raspbian Installation Instructions \(on page 252\)](#).

Added support for BigFix Agent SLES 15 on Intel

Added support for BigFix Agent running on SUSE Linux Enterprise 15 x86_64 on Intel.

Security vulnerabilities and library upgrades

- The OpenSSL toolkit level was upgraded to Version 1.0.2r.
- The libcurl file transfer library level was upgraded to Version 7.64.0.

Patch 12:

Security vulnerabilities and library upgrades

In this version, security vulnerabilities were addressed and some libraries were upgraded.

- The OpenSSL toolkit level was upgraded to Version 1.0.2q.
- The jQuery library level was upgraded to Version 3.0.0.
- The jQuery UI library level was upgraded to Version 1.12.1.
- The jqPlot (jQuery plugin) level was upgraded to Version 1.0.9.

Patch 11:

Reduce network traffic and relay infrastructure costs by exchanging cached files with peers (PeerNest)

This version introduces peer-to-peer configuration which will help you reduce the relay infrastructural costs. In a peer-to-peer setup, endpoints in a subnet coordinate their download activities in order to download binaries only once from the relay, thus reducing the network traffic outside of the subnet. With this setup, you can facilitate a faster and direct exchange of binaries between endpoints and remove the need for every client to download the same binary from a relay, allowing the removal of dedicated relays from branch offices.

For details, see [Working with PeerNest](#).

Improve real-time visibility by delivering notifications to clients across firewalls through client-established, persistent connections

The BigFix Query function relies on a UDP based notification where the relay notifies the clients of a new query. Firewalls or NAT may block this notification mechanism. Through the new persistent connection feature, a persistent connection initiated by the client is used by the relay to manage the UDP based notification. This allows the delivery of any type of notification, thus offering a faster alternative to command polling. A persistent connected client also acts as a UDP notification forwarder (proxy) for the other clients in the same subnet which can reduce the number of connections and optimize relay performance. The relay can deliver notifications to clients through client-established, persistent connections.

For details, see Persistent connections.

Prevent BES server overload and network congestion by defining a fallback relay

You can now define a fallback relay for your clients when they fail to connect to any relay specified in their settings.

For details, see [Step 2 - Requesting a license certificate and creating the masthead \(on page 101\)](#) and Editing the Masthead on Linux systems.

Simplify the installation and upgrade of the WebUI component including it as part of the BigFix Platform installation

The installation of the BigFix Platform (both evaluation and production versions) on both Windows and Linux now includes the option to install the WebUI component as well, offering a convenient alternative to the fixlet-based installation. The upgrade of the WebUI component will be executed as part of the platform components update process, and as noted in 9.5.10,

the WebUI can now scale to manage 120,000 endpoints from either a Linux or Windows BES Server installation.

For details, see [Installing the WebUI \(on page 143\)](#) (Windows) and [Installing the WebUI Standalone \(on page 192\)](#) (Linux).

Enhance corporate security by specifying the TLS ciphers that can be used in network communications between the BigFix components and the internet

Starting in this version, master operators can control which TLS ciphers should be used for encryption. A master operator can set a deployment-wide TLS cipher list in the masthead by using BESAdmin.

For details, see [Working with TLS cipher lists \(on page 347\)](#).

Enhance security and reduce load on the BES root server by automatically shutting down the BigFix Console after a period of inactivity

Starting in this version, you can control the maximum amount of time to keep an inactive session of BigFix console alive. After the timeout, the BigFix console is closed.

For details, see List of advanced options.

Enhance the security of your BigFix Server by optionally disabling access to the Internet

Starting in this version, you can control whether your server accesses the Internet for updating the license and gathering the sites or not by using a configuration setting.

For details, see Airgap Mode.

Gather WebUI content more securely through HTTPS and in an optimized manner

- WebUI: Gather BES sites with HTTPS by default

You can gather license updates and external sites by using the HTTPS protocol on a BigFix server or in an airgapped environment. For details, see Customizing HTTPS for Gathering.

- Optimize Gathering from Synch Servers

The Gathering process has been optimized with more effective handling of Gather errors.

Establish an increased level of security when creating new users by assigning them minimal permissions

When you create users, they are assigned minimum permissions (read-only) by default, which offers an additional level of security.

For details, see List of advanced options (look up `defaultOperatorRolePermissions`) and Adding Local Operators.

Enhanced security and visibility with more detailed server audit logs

The server audit logs now include the following items:

- Messages for deletion of computers from the console or through API
- Messages for deletion of actions
- Audit entries are presented in a single line and contain the same number of field delimiters. Field delimiters are present even if no value exists for a specific field. Since the format of the audit fields is subject to change over time, each line has a version number as the first entry. The current format includes texts from existing audit log messages (which are in old format) and presents them in the last field.

The server generates audit logs for two new events: the deletion of an action and the removal of a computer.

For details, see Server audit logs.

Reduce the costs of managing relay infrastructure through a new Dashboard that summarizes relay health across the entire network

You can now monitor the status of your relays across the entire network by using the Relay Health dashboard. The Relay Health Dashboard shows you specific details about the relays in your BigFix environment.

For details, see Relay Health Dashboard.

Configure the default behavior of Timeout Override on clients

Starting in this version, you can define the default behavior for timeout and disposition on a specific client for all the programs or processes triggered by any wait or waithidden commands, unless it is specified differently in an override section of that specific wait or waithidden command definition.

For details, see List of settings and detailed descriptions.

Optimize and accelerate Platform REST API interactions

You can now control and reduce the number of fields returned by a REST request by using the `?fields=` parameter to limit the fields returned for a given resource when using the API resources `/api/actions` and `/api/action/{action_id}/status`.

For details, see [Action](#) and [Computer](#).

Accelerate fixlet creation and testing by using the FastQuery interface in Fixlet Debugger

Fixlet Debugger is extended to use FastQuery interface in addition to Local Fixlet Debugger Evaluator and Local Client Evaluator. You can choose a remote endpoint to evaluate relevance.

For details, see [Fixlet Debugger](#).

Save time when working in tight maintenance windows by enabling group actions to start before sub action downloads are available

Group actions with pre-cached downloads now start without requiring all sub-action downloads to be available on the client, provided the downloads for the first relevant sub-action are available. Additionally, the server and relay caches are primed by continuing with as many download requests as possible even under a 'disk limited' constraint.

For details, see Enabling data pre-cache.

Other Enhancements

- Improved documentation on configuration settings. For details, see BigFix Configuration Settings.
- Added changes to the client component for enabling a new version of the self-service application (SSA).
- Added support for running Agent and Relay on Windows Server 2019.

Patch 10:

CDT Key file option and custom installation path

When installing the BigFix clients from the Client Deploy Tool (CDT) Wizard, you can access the target computers through the SSH key authentication. You can also specify for the Windows target computers a custom installation path, if you do not want to use the default installation path.

For more information, see [Deploying clients from the console \(on page 231\)](#).

TLS-encrypted SMTP connection for Web Reports

When setting up an email address from Web Reports, you can upgrade the SMTP connection to TLS.

For more information, see [Setting Up Email](#).

Windows authentication leveraged in command line utilities

You can use your Windows credentials to authenticate to BigFix utilities such as the PropagateFiles.exe tool and the IEM CLI.

For more information, see [Creating special custom sites whose name begins with FileOnlyCustomSite](#).

Windows performance, efficiency, and maintenance improvements

- The FillDB configuration was modified to permit more efficient database bulk insert and update operations. Given that FillDB is responsible for pushing client reports into the database, this results in a more responsive and more efficient BigFix.
- The Microsoft SQL Server configuration was updated to provide improved concurrency and scalability options for BigFix.
- The BigFix provided Microsoft SQL Server index management scripts were rewritten to ensure indexes are better managed, with improved fault tolerance while consuming fewer system resources and reducing application impact. This has a positive impact on the long term performance, scalability, and stability of BigFix.

Added support for BigFix Agent SLES 11 and 12 on Power 9

Added support for the following BigFix Agents:

- SUSE Linux Enterprise 11 PPC on Power 9 (P8 compatibility mode)
- SUSE Linux Enterprise 12 PPC on Power 9 (P9 mode)

Added support for BigFix Agent on Mac OS 10.14

Added support for BigFix Agent on MacOS 10.14.



Note: On Mac OS Mojave Version 10.14 or later, some default security settings restrict access to certain folders in the user's library which in turn might affect custom content. For more information, see [Client requirements \(on page 61\)](#).

64-bit enablement for the Mac OS agent

The Mac OS agent binaries are now 64-bit applications.

Changes in the disaster recovery, hardware migration and roll back procedures

The changes introduced by some of the security enhancements have an impact on the disaster recovery, hardware migration and roll back procedures. For more details about these procedures, see:

[Server Backup \(on page 457\)](#)

[Server Recovery \(on page 459\)](#)

[Removing the Product Components on Linux systems \(on page 221\)](#)

[Migrating the BigFix Server \(Linux\)](#)

Changed signing key for the Red Hat installation packages

Starting from BigFix Version 9.5.10, the Red Hat RPM packages for Server, Agent and Relay are signed with a new PGP key, different than the one used in Version 9.5.9. Also the CentOS

BigFix Agent and Relay use the same Red Hat binaries. The same applies to Oracle Linux BigFix Agent.

For more information, see [Red Hat Installation Instructions \(on page 253\)](#).

Patch 9:

Added signature to the Red Hat installation packages

Starting from BigFix Version 9.5.9, the Red Hat RPM packages for Server, Agent and Relay are signed with a PGP key. Also the CentOS BigFix Agent and Relay use the same Red Hat binaries. The same applies to the Oracle Linux BigFix Agent.

For more information, see [Red Hat Installation Instructions \(on page 253\)](#).

Ability for endpoints to constrain the download action if the Agent is not connected to the designated (preferred) Relay

BigFix 9.5.9 introduces the capability to prevent starting actions requiring downloads when the BigFix Agent is not connected to a preferred Relay. In such scenario, you can avoid that actions are executed if the total size of the downloads associated to the action exceeds a configurable value.

For more information, see Download.

Ability for Web Reports to restrict access to some properties

BigFix 9.5.9 introduces a new client setting that allows to configure a list of properties that will be blacklisted for Web Reports. In such scenario, you can prevent reporting on large or privacy sensitive data and you can limit the memory usage.

For more information, see the

`WebReports_Properties_BlackList` setting in Web Reports.

Improved Relay scalability by supporting 5000 endpoints per Relay

BigFix leaf relays for the Windows and Linux platforms can be configured now to manage up to 5000 endpoints.

For the implementation guidelines, see the BigFix capacity planning guide: [BigFix Performance and Capacity Planning](#).

Added support for AIX 7.2 on Power 9

Added support for BigFix Agent and Relay on AIX 7.2 on Power 9.

Patch 7:

New database offered during the installation

When performing a fresh installation of BigFix Server Version 9.5 Patch 7, if no database engine is detected, you can choose whether to install Microsoft SQL Server 2016 SP1 Evaluation or to manually install another SQL Server version. The provided evaluation version is valid for 180 days.

Slimmed down Windows installation files

When performing a fresh installation or an upgrade to Patch 7, the SQL Server installer is provided as a separate file and is no longer contained in the BigFix server installer which is now smaller.

Client Deploy Tool enhancements

- Added a new wizard to distribute the agents on all supported platforms
- Added a new dashboard to view the results of the deployments
- Added the possibility to upload the target log files to the BigFix server.

Names of files and folders using local encoding on UNIX and Linux clients

You can specify the names of files and folders of UNIX and Linux clients in their local encoding, even if it is different from the encoding on the BigFix server. Depending on the actions to be completed on the client, you can use a set of commands that are documented on [BigFix Developer site](#).

Read from and write to files, having different encoding

You can read from and write to files, having different encodings using the encoding inspector. For additional information see [Reading and writing files in the specific encodings \(on page 37\)](#) and [BigFix Developer site](#).

Enhanced Client identity matching when Clients are detected

You can use the new setting (`clientIdentityMatch`) to allow the BigFix Server to use the existing computer information to try to match the identity of a Client and reassign the same `ComputerID` to computers that might have been rolled back or restored and avoid having duplicate computer entries.

New options when running commands as a user local to the target

The **override** action script command has been improved with new options to run commands on the target client as user different from the logged on user. For more information, see the [override command](#) on the BigFix Developer web site.

Improved SSL configuration documentation

The documentation of SSL configuration has been updated to ensure a major consistency across the different BigFix applications. See the overview of the SSL configuration containing certificate requirements and links to the SSL configuration procedures for all BigFix applications: [HTTPS across BigFix applications](#).

Patch 6:**Security enforcement enhancements**

Two new masthead parameters, `minimumSupportedClient` and `minimumSupportedRelay` are added to enforce a higher level of security in the deployment. For more information, see [BESAdmin Windows Command Line \(on page 299\)](#) for Windows servers, or [BESAdmin Linux Command Line \(on page 321\)](#) for Linux servers.

New security check on Fixlet/task content

A new security check was added to parse the content of the imported or generated Fixlet and tasks, and identify the existence of possible script content. If such content is detected, a Warning Panel is displayed to the Console Operator.

OpenSSL Initialization changes

Starting from 9.5.6, each BigFix component initializes OpenSSL in FIPS Mode based on the existence of the client setting `_BESClient_Cryptography_FipsMode`, and the client masthead.

Default status of Relay Diagnostic page changed

On both the Server and the Relay components, the Relay Diagnostic page is now disabled by default. The Relay Diagnostic page can be enabled again by setting `_BESRelay_Diagnostics_Enable = 1` on those components.

Additional changes

- Resigning of Mac Clients with new certificates
- Console Qualification for Windows 10 Creators Update

Patch 5:**Enablement for the BigFix Detect application**

Client Deploy Tool enhancements

- Enabled the agents distribution on all supported platforms by using a new Fixlet
- Enabled the distribution of the old agent versions, including agent versions that are no longer supported in BigFix Version 9.5

Added capability to run Fixlet actions as a specific user and to specify the context for the actions

Specified under which specific user context a specific action must be run on the endpoint

Airgap tool enhancements

- Added capability to gather information on external sites without accessing a BigFix server in a secure deployment
- Added file download capability

Enhanced the FillDB component to process agent reports by using a multi-thread approach

Improved BigFix Platform performance by leveraging multi-core server resources

Added capability for a Non-Master Operator to stop other Non-Master Operator actions

Enhanced the BigFix evaluation installation to avoid ripping and replacing the BigFix deployment if transition to production license is needed

Improved the user experience for "Try and Buy" scenarios and promoted the evaluation environment to production environment without installing again

Enhanced the REST API for Baseline support

Enabled REST API to perform major baseline functionality available on the console

Enhanced the BigFix agent application usage summary inspector

Collected the process executable path

Enhanced the Mac OS version of BigFix agent and inspectors

- Detected applications installed into the /Library path
- Improved Wi-Fi inspectors
- Leveraged spotlight search when using inspectors for searching Mac installed applications
- Enabled the process inspectors to report the process path name

Improved the BigFix database layer to enable direct access from Web UI

- Enabled the Web UI not to depend on ETL and ensured backward compatibility with current Web UI versions still leveraging ETL
- Improved the Web UI scalability and performance

Enhanced the Client UI end-user experience

- Made running message dialog optionally not dismissible
- Made running message dialog optionally topmost

Enhanced the Self Service application enablement

- Allowed REST API blocking "action-ui-metadata" mime field included in the baseline and MAG definition
- Added timestamp information of when the offer was issued in the Offer Available message

Security enhancements

- Changed non-FIPS OpenSSL Windows library to use ASLR
- Created native Red Hat Enterprise Linux (RHEL) Version 6 based agent and relay to allow the client installation when the operating system is in FIPS mode

Patch 3:

Enablement for Remote Web UI deployment

You can deploy the Web UI on a remote endpoint rather than on the BigFix Server.

Enablement for BigFix Query enhancements

You can target BigFix Query requests to dynamic groups.

Enablement for BigFix Software Distribution enhancements

You can use the Self-Service catalog from the Client UI when using the SWD application.

Enablement for DB2 HADR

You can run the database backup without requiring the shutdown of the BigFix Server.

Enablement for BigFix Patch enhancements

A new inspector is added to the set of Client inspectors to allow the Patch application to discover broken filesets on AIX agents.

Added support for new platforms and database levels

- Microsoft SQL 2016 support
- Tiny core Linux support for relay.
- BigFix agent now supported on:
 - SUSE Linux Enterprise 12 on Power 8 Little Endian
 - Ubuntu 16.04 on Power 8 Little Endian
 - Windows Server 2016 and System Center 2016
 - Windows 10 Anniversary Update
 - Mac OS 10.12 (Sierra)

Migrated BigFix Platform manuals to the new BigFix Developer site

The content of the following manuals was reworked, improved, and migrated to the [BigFix Developer website](#), the new repository for the BigFix Platform development and customization documentation:

- Relevance Guide
- Action Guide
- API Reference Guide

Additional enhancements

- SHA-2 signing certificate for Windows binaries
- Capability to install and run the Web Reports as a non-administrative user.

Patch 2:

BigFix Query

You can use this function to retrieve information and run relevance queries on client workstations from the WebUI BigFix Query Application or by using REST APIs. This function is available only for BigFix Lifecycle or BigFix Compliance Version 9.5 Patch 2 or later licenses. For more information, see Getting client information by using BigFix Query.

Version 9.5

Unicode support

BigFix Platform V9.5 gathers data from BigFix clients deployed with different code pages and languages, encodes the data into UTF-8 format, and reports it back to the BigFix server.

HTTPS gathering

You can gather license updates and external sites via the HTTPS protocol on a BigFix server or in an airgapped environment.

SAML V2.0 integration

Single-sign-on and CAC/PIV authentication support for BigFix LDAP operators connecting to the console.

Database cleanup tools

You can use the BESAdmin interface or the BESAdmin command line to remove data about computers, custom Fixlets, properties, analyses, and actions and to update the PropertyIDMap table with changes.

FillDB log rotation

It is active by default with **LogFileSizeLimit** set to 100 MB.

For more information about the changes and the enhancements introduced with V9.5, see the <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Change%20and%20Release%20Notes>.

Architectural components overview

The BigFix system encloses different components. Main components are:

BigFix Agents:

They are installed on every computer that you want to manage using BigFix. A computer on which the BigFix agent is installed, is also referred to as client. Clients access a collection of Fixlets that detects security exposures, incorrect configurations, and other vulnerabilities. The client can implement corrective actions received from the console through the server. The BigFix client runs undetected by users and uses a minimum of system resources.

BigFix also allows the administrator to respond to screen prompts for those actions that require user input. BigFix clients can encrypt their upstream communications, protecting sensitive information. To acknowledge all the

Operating Systems that the BigFix Client software supports, please refer to the [BigFix Support Matrix](#).

BigFix Servers:

Offer a collection of interacting services, including application services, a web server, and a database server, forming the heart of the BigFix system. They coordinate the flow of information to and from individual computers and store the results in the BigFix database. The BigFix server components operate quietly in the background, without any direct intervention from the administrator. BigFix servers also include a built-in **Web Reporting** module to allow authorized users to connect through a web browser to view all the information about computers, vulnerabilities, actions, and more. BigFix supports multiple servers, adding a robust redundancy to the system.

To acknowledge all the Operating Systems that the BigFix Server software supports, please refer to the [BigFix Support Matrix](#).



Note: On Windows, as of BigFix V10, Server and Web Reports components support only 64-bit architecture.

BigFix Relays:

Increase the efficiency of the system. Instead of forcing each networked computer to directly access the BigFix server, relays spread the load. Hundreds to thousands of BigFix clients can point to a single BigFix Relay for downloads, which in turn makes only a single request to the server. BigFix Relays can connect also to other relays, further increasing efficiency. A BigFix Relay need not be a dedicated computer.

To acknowledge all the Operating Systems that the BigFix Relay software supports, please refer to the [BigFix Support Matrix](#).

As soon as you install a BigFix Relay, the clients in your network can automatically discover and connect to them.

BigFix Consoles:

Join all these components together to provide a system-wide view of all the computers in your network, along with their vulnerabilities and suggested remedies. The BigFix Console allows an authorized user to quickly and simply distribute fixes to each computer that needs them without impacting any other computers in the network.

To acknowledge all the Operating Systems that the BigFix Console software supports, please refer to the [BigFix Support Matrix](#).



Note: The computer where the Console runs requires network access to the BigFix server.



Note: On Windows, as of BigFix V10, the Console component supports only the 64-bit architecture.

BigFix Client Deploy Tool:

Allows you to install Windows, UNIX and Mac target computers in an easy way.

BigFix WebUI:

A cross-platform user interface that lets you perform actions on devices, perform deployments and manage reports.

Chapter 2. BigFix Platform Unicode Support Overview

BigFix Platform V9.5 gathers data from BigFix clients deployed with different code pages and languages, encode the data into UTF-8 format, and report it back to the BigFix server.

This capability is useful when your environment has clients with different code pages and the client reports contain non-ASCII characters. It is supported only if all BigFix components (server, relays, clients) are upgraded to V9.5. To achieve this result, the masthead file has been modified. After it is propagated to the clients and the new values become active, all the client reports containing non-ASCII characters are displayed correctly on the BigFix console, even if the reports come from clients with code page different from the BigFix server code page. The BigFix console works also if installed on a system with local encoding different from the BigFix server encoding by getting the BigFix server encoding and the report encoding from the masthead.

Starting in version 9.5.13, to gather sites that contain non-ASCII fixlets on Linux computers, you must enable the `_BESGather_Download_AllowNoStopTranscoding` configuration setting. For details, look up the setting in List of settings and detailed descriptions.

To understand how this feature works, read about the concepts of FXF encoding and report encoding.

FXF encoding

Affects the top-down data flow, that is, the encoding of the data that flows from the BigFix server to the BigFix clients (such as actions, site subscriptions, computer groups, and more).

Report encoding

Affects the bottom-up data flow, that is, the encoding of data that flows from the BigFix clients to the BigFix server.



Important: Before upgrading BigFix server to V9.5, it is required that it is at V9.2.3 or later.



Note: The language in which the Web Reports component is displayed is determined by the browser settings. For example if your browser language is Japanese, then you will see Web Reports in Japanese.

Masthead encoding parameters

The masthead file has been modified to contain the following two new parameters:

```
x-bes-fxf-charset: codepage_data_from_server_to_clients (for  
example: windows_1252)  
x-bes-report-charset: utf-8
```

where:

x-bes-fxf-charset

Represents the **FXF encoding** and affects the encoding of the data that is sent from the BigFix server to the BigFix clients (such as actions, site subscriptions, computer groups, and more). Its value is determined by the code page of the system where the BigFix server component is installed, and, for both Windows and Linux systems, can assume one of the values listed in the [Code Pages supported by Windows](#) page.

x-bes-report-charset

Represents the **report encoding** and affects how BigFix clients encode their reports before sending them to the BigFix server. Its value is always **utf-8**.

Top-down data flow: from the BigFix server to the clients

The encoding capability when sending data from the BigFix server to BigFix clients is the same as BigFix V9.2; UTF-8 support of the top-down data flow is not available in BigFix.

The top-down data flow (such as actions, site subscriptions, computer groups, custom sites, and more) works only if you use non-ASCII data that belongs to the FXF encoding.

For example, if you try to create a custom site whose name contains characters different from the FFX encoding (suppose FFX encoding is Windows 1252, and the name of the site is `Site_albêrto`, where character `ê` is specific to the Windows 1250 encoding), the BigFix console displays an error message. The same error occurs when trying to create this custom site using the REST API or Command-Line Interface (CLI).

On BigFix servers running on Windows systems the installer sets the FFX encoding (`x-bes-ffx-charset`) in the masthead without any user interaction.

On BigFix servers running on Linux systems the installer shows the `x-bes-ffx-charset` setting to the user, proposing a default value and allowing the user to confirm or change it. You can also change it by using the `ENCODE_VALUE` response key in the silent installations.

Bottom-up data flow: from BigFix clients to BigFix server

BigFix Platform V9.5 uses UTF-8 as the standard encoding system to send reports from BigFix clients to BigFix server. The `x-bes-report-charset` parameter is set to **utf-8** in the masthead and its value cannot be changed.

In this way, any text character is efficiently represented and handled, regardless of the language, application, or platform that you are working on.

After upgrading a BigFix server V9.2 to V9.5, the updated masthead with the new `x-bes-ffx-charset` and `x-bes-report-charset` parameters is propagated through the whole deployment.

BigFix clients V9.2 manage the `x-bes-report-charset` parameter and send their reports as UTF-8 encoded to the BigFix V9.5 server, but they are able to recognize and convert to UTF-8 only the characters related to the local code page.

BigFix clients V9.1 ignore the `x-bes-report-charset` parameter and continue to send their reports with an encoding that depends on their configuration (such as either local operating system encoding, or an encoding forced by the `_BESClient_DeploymentEncoding_IANAName` client setting).

If the value of the `x-bes-ffx-charset` in the updated masthead is different from the value of the FFX encoding that the client was using before the upgrade, then the `BESClient`

process must be restarted for the new value to become effective. In this case, the behavior of the client depends on its version, according to the following:

- BigFix clients V9.2.6 or later restart the `BESClient` process automatically and make the new masthead parameters effective immediately.
- BigFix clients V9.2.0 through V9.2.5 will have the new masthead parameters effective at the time the `BESClient` process is restarted for the first time after receiving the updated masthead.
- BigFix clients V9.1 are not influenced by the new masthead parameters.



Important: Immediately after receiving the updated masthead, restart the `BESClient` process on BigFix clients V9.2.0 through V9.2.5 to activate the new masthead parameters. Use the tasks available under BES Support to restart the clients. You can find these tasks by filtering for "Troubleshooting: Restart BES client" the Fixlets and Tasks list on the BigFix Console.



Note: After upgrading BigFix to V9.5, the `filldb` process on clients might fail if the `filldb` buffer directory contains reports that use an unexpected report encoding value, for example `ReportEncoding: hp-roman8`. If so, clean up the `filldb` buffer directory containing the reports and then restart `filldb`.

Unicode support requirements and limitations

This is a list of BigFix Platform V9.5 requirements and limitations when using non-ASCII characters:

- **BigFix installation:**
 - The BigFix components (server, relays, WebReports) must be installed on systems whose hostname contains only ASCII characters.
 - The installation paths of c components must contain only ASCII characters.
- **BigFix upgrade to V9.5:**

- You can upgrade BigFix server to V9.5 only manually.
- After the upgrade, passwords containing non-ASCII characters are corrupted and users can no longer log in. In this case, before using the product, you must reset this type of password. When resetting the corrupted password, you can choose to use the same password or a new password that can have non-ASCII characters.
- You might encounter issues upgrading a BigFix client having settings whose names or values contain non-ASCII characters. If custom settings with these names or values exist, check they are still valid after upgrading to V9.5.
- After the upgrade, non-ASCII characters input in action message tabs might be garbled on Client user interfaces because of missing character sets, when the BigFix deployment encoding code page is different from the client code page. As a workaround, you can edit the `/usr/share/fonts/liberation/fonts.dir` file to remove references to fonts that do not exist, and correct the font count at the beginning of the file to match those actually found. It must also be noted that including the `xorg-x11-fonts-misc` font package might provide the missing character sets for certain localized installations.
- After the upgrade of the BigFix Server to V9.5, if you have settings with non-ASCII characters on clients earlier than V9.5, you might need to reset them.
- Immediately after receiving the updated masthead, restart the BESClient process on BigFix clients V9.2.0 through V9.2.5 to activate the new masthead parameters. Use the tasks available under BES Support to restart the clients. You can find these tasks by filtering for "Troubleshooting: Restart BES client" the Fixlets and Tasks list on the BigFix Console.
- After upgrading BigFix to V9.5, the `filldb` process on clients might fail if the `filldb` buffer directory contains reports that use an unexpected report encoding value, for example `ReportEncoding: hp-roman8`. If so, clean up the `filldb` buffer directory containing the reports and then restart `filldb`.

• **BigFix proxy agent:**

Subscription to computer groups containing special characters in the name is not correctly evaluated by devices managed by the BigFix proxy agent. Avoid special characters in the computer group names.

- **BigFix interfaces:**

- The BigFix interface generally allows only characters belonging to the FXF encoding (that is the value assigned to the `x-bes-fxf-charset`). For example, if a user tries to create a custom site whose name contains characters other than FXF encoding (suppose `x-bes-fxf-charset` parameter is Windows 1252, and the name of the site is `Site_albêrto`, where character `ê` is specific to the Windows 1250 encoding), the BigFix console displays an error message. The same error occurs when trying to create the custom site via REST API or Command-Line Interface (CLI). This rule does not apply to Operator Name and Fixlet Description that allow non-ASCII characters.
- Operators with non-ASCII characters in the user name might have problems to log in through REST API. It is recommended that your REST API client uses the UTF-8 encoding format.
- The BigFix APIs, including server, client, dashboard, and Web Reports, support only UTF-8 encoding.
- Situations in which non-ASCII data is used might change behavior. For example, manually percent encoded data in an action script might be decoded assuming a different encoding than in previous client versions, resulting in a different action operation.

- **Files:**

- The name of a custom site can contain only characters belonging to the FXF encoding (that is the value assigned to the `x-bes-fxf-charset` parameter). When a user creates a new custom site, BigFix console and REST APIs will block any input names that contain characters outside that set. If a client of the deployment has a local OS encoding other than the FXF, a local client user might not be able to display the name of the Subscribe or Unsubscribe files correctly.
- Files that are added to custom sites must be ASCII named.

- **Linux and the Windows HTTP servers:**

Both the Linux and the Windows HTTP servers now accept both raw UTF-8 encoded URLs as well as percent encoded UTF-8 URLs .

- **Client Relevance:**

Client relevance supports characters in FFX encoding (the value assigned to the `x-bes-ffx-charset` parameter). Session relevance supports Unicode characters because it uses UTF-8 encoding with all interfaces (that is, BigFix console, WebReports, REST API, SOAP API). The following session relevance inspector, which allows you to get the FFX encoding of a BigFix Server is available:

```
ffx character set of <bes server>: string
```

- **Key exchange:**

The BigFix client can include passwords with ASCII characters only in its key exchange with the authenticating relay.

- **Log files:**

- Product log files are always UTF-8 encoded. On platforms other than Windows, log paths and file names must contain ASCII characters only.
- If you change the name or the path of the client log in the `_BESClient_EMsg_File` setting, to avoid character display problems, ensure that you use names that have only ASCII characters.

- **DB2 Administrative user password:**

You can use only ASCII characters when setting the DB2 Administrative user password.

- **Download and upload:**

- Dynamic download of URL having non-ASCII characters fails on Windows clients. The URLs in the file should be percent encoded UTF-8 to avoid this kind of issue.

For example the URL:

```
/tmp/dòwnlòàd
```

should be represented as:

```
/tmp/d%C3%B2wnl%C3%B2%C3%A0d
```

- From Macintosh clients V9.2 or earlier, you cannot upload files with file name containing non-ASCII characters that are not contained in the server code page.

- You cannot download a file that contains non-ASCII characters in its name.
- You cannot use non-ASCII characters in file names to be downloaded.

- **Command prompt property:**

Command prompt property whose font is set to Raster Fonts on the BigFix server workstation might generate problems in displaying characters. It is recommended to set the font to a value different from Raster Fonts.

- **Earlier clients:**

A client BigFix V9.2 or earlier working on a code page different from the FXF code page might not support the file archive operation. When the name of an archived file has a character that does not exist on the FXF code page, the file is not available on the target directory after archive now.

- **Server system locale:**

Do not change the system locale on the BigFix server to avoid compromising the server functionalities.

- **Web Reports server:**

Web Reports cannot aggregate data sources that have different FXF encodings. For example, you cannot aggregate a Windows-1252 data source with a Shift-JIS data source within the same instance of a Web Reports server.

- **Fixlet Debugger (QnA) tool and QnA command line:**

- The Fixlet Debugger graphical breakdown window can only render 256 unique text characters. Relevance text characters outside the supported range will be replaced by an 'X' with inverted foreground and background colors.
- If you want to use non-ASCII characters in the QnA tool, ensure that the font in the command prompt properties of your workstation is set to a value compatible with non-ASCII characters, otherwise characters might not display correctly. Alternatively, use only ASCII characters.

- **Client settings:**

Setting names on BigFix V9.5 UNIX and Linux clients cannot contain any of these three characters: "]" (right square bracket), "\" (backslash), "=" (equals) If you use any of these characters in a setting name, the Add Setting will appear to succeed but the

setting will be either missing or corrupt. It is also possible that neighboring settings might be affected adversely. If settings containing these characters exist on a BigFix V9.2 client, they will be missing or corrupt when upgrading to a BigFix V9.5 client.

- **BES Support:**

- Fixlets are not properly displayed when BigFix was installed using the Korean language. In particular, the Take Action drop-down list is blank. As a workaround, either reinstall BigFix by selecting a language different from Korean and create a new masthead, or create a custom site and copy the tasks/Fixlets/analyses from the BES Support site to the custom site.
- If the task **2283-WARNING: BES Client has local codepage limiting content** is relevant for a client, the local codepage of the client has some limitations and might be able to understand only ASCII as the codepages are not in common with the codepage of the server. A simple restart of the client service could address the issue. Because on some platforms the default installation is only available in ASCII (AIX for example) , as a workaround you should install the Unicode language functionality.

Reading and writing files in the specific encodings

BigFix agent uses UTF-8 as the internal representation of strings.

When data is written to a file or read from a file, text is transcoded from the local encoding to UTF-8 or viceversa, unless the file is already UTF-8. Using the encoding inspector, you can now specify to read and write a file in a specific encoding. You can use the inspector in an action or in a relevance expression:

- To read a file in a specific encoding you can specify the encode in the `file content`, `file line` and `file section` inspectors.
- To write a file in a specific encoding you can specify the action uses `file` encoding command along with the `appendfile` and `createfile until` commands.

Background information

When files are written, by default, the BigFix agent assumes that the encoding is the local one.

On a client with local encoding different from UTF-8 (like Windows), text data is transcoded from UTF-8 to the local encoding. Using the `encode` inspector you can now specify what encoding must be used to read and write files.

When files are read, if the Byte Order Mark (BOM) is set, file encoding is determined based on the BOM. Otherwise, the content of file is assumed to be in the local encoding.



Note: Inspectors and the Action Script language no longer handle binary file contents, because file is transcoded to or from UTF-8.

Reading file inspectors

You can use the inspector object `encoding` to specify an encoding to be used to read file in a relevance expression.

If you do not specify any encoding, the files are read in the local encoding. The `encoding` object is used to read a `file` as the following:

```
file "filename" of encoding "encoding"
```

The *encoding* might be any name which ICU can recognize, such as ISO-8859-1, Shift_JIS, and UTF-8.

Using this `encoding` object, you can affect the behaviors and results of relevance expressions using the following objects:

- [file content](#)
- [file line](#)
- [file section](#)

Here some simple examples:

```
(content of file "c:\aaa\bbb.txt" of encoding "Shift_JIS")
contains "??"
```

Return if the word "??" is found in the file "c:\aaa\bbb.txt" that is written in Shift_JIS

```

line 3 of file "eee.txt" of folder "/ccc/ddd" of encoding
"Windows-1252"

# Return the third line of the file "/ccc/ddd/eee.log" in Windows-1252

lines of file "/fff/ggg.txt" of encoding "UTF8"
Return the lines of the file "/fff/ggg.txt" in UTF8

lines of file "/hhh/iii.txt" of encoding "ISO-8859-1"
Return the lines of the file "/hhh/iii.txt" in ISO-8859-1

```

You can use the `encoding` object by adding it after the keywords listed below to create `file` objects:

- file
- folder
- download file
- download folder
- find file <string> of <folder>
- x32 file (Windows only)
- x32 folder (Windows only)
- x64 file (Windows only)
- x64 folder (Windows only)
- native file (Windows only)
- native folder (Windows only)
- symlink (Unix only)
- hfs file (Mac only)
- posix file (Mac only)
- hfs folder (Mac only)
- posix folder (Mac only)

The `encoding` object cannot be used with creation methods for Mac's special folders such as `apple extras folder`, or `application support folder`. For such folders, you can use the `folder` object by specifying their paths.



Note: If you try to open a file with an encoding using the `encoding` object and the file has a BOM, the file is opened in the encoding indicating the BOM; that is, the specified encoding is ignored.



Note: If, for whichever reason, the BOM of the file does not reflect the encoding of its content, the file line inspector fails with the `U_INVALID_CHAR_FOUND` error.



Important:

The `file` objects must be evaluated as a property of the `encoding` object during its creation. You cannot specify any encoding to `file` objects which are already created in the relevance expression:

```
(file "aaa.txt" of folder "c:\test") of encoding "Windows-1252"
  # Not work. The encoding will be ignored.
```

In this relevance expression, the file `c:\test\aaa.txt` is read in the local encoding, not the Windows-1252 encoding, because a file object representing `c:\test\aaa.txt` is created first with the expression enclosed parenthesis and the subsequent `encoding` expression is ignored.

In the following expression the file `c:\test\aaa.txt` is read in the Windows-1252 encoding:

```
file "aaa.txt" of folder "c:\test" of encoding "Windows-1252"
```

Writing file with the encode command

You can use the Action Script command `action uses file encoding` to specify the encoding in which to write files when using the `appendfile` and `createfile until` commands.

The encoding is effective until another encoding is specified. If you do not use the `action uses file encoding` command, the `appendfile` and `createfile` commands create files in the local encoding.

The command syntax is:

```
action uses file encoding encoding [ NoBOM ]
```

The encoding might be any name which ICU can recognize, such as ISO-8859-1, Shift_JIS, and UTF-8. After created, the file objects can be used as regular file objects and you can apply any operations applicable to text files.

To turn off the encoding change and reuse the local encoding, you can set the encoding keyword to `local`.

If any of the UTF encodings (UTF-8, UTF-16, or UTF-32) is specified as the value of encoding, the file to be created will have a BOM (Byte Order Mark) at the head of it. If the client local encoding is UTF-8 and no encoding is specified in an action, files to be created with the action will be written in UTF-8 without BOM.

To suppress adding any BOM, you can use the option `NoBOM` (case-insensitive) following the value of encoding. The `NoBOM` option is effective only with any UTF encodings (UTF-8, UTF-16, and UTF-32), and it is ignored if it is used with any other encoding name.

The following action creates a files using the Windows-1253 (Greek) encoding:

```
delete "{(client folder of current site as string) & "/__appendfile"}"
action uses file encoding Windows-1253
appendfile Κόκκινο ου?ανό τη ν?χτα
delete C:\encode_test.txt
move __appendfile C:\encode_test.txt
```

The following action creates two files the first using the Windows-1253 (Greek) encoding, the second using the local encoding:

```
delete "{(client folder of current site as string) & "/__appendfile"}"
appendfile Following lines contains Greek language strings
action uses file encoding Windows-1253
appendfile Κόκκινο ου?ανό τη ν?χτα
move __appendfile C:\Greek_test.txt
// switch to local encode
delete "{(client folder of current site as string) & "/__appendfile"}"
```

```

appendfile Following lines contains English strings
action uses file encoding local
appendfile  Am I writing a local US strings now !
delete C:\tmp\local_test.txt
move __appendfile C:\tmp\local_test.txt

```

The following action creates a file using the UTF-8 encoding without a BOM:

```

delete "{(client folder of current site as string) & "/__appendfile"}"
action uses file encoding UTF-8 noBOM
appendfile Hello world !!
delete /tmp/encode_test.txt
move __appendfile /tmp/encode_test.txt

```

Reading and writing files with encode

Using the encode inspectors, you can also read from and write to files, having different encoding.

The following example shows an action that reads the first line of a file having Windows-1253 (Greek) encoding, and writes it into a file having Windows-1252 (English) encoding:

```

delete "{(client folder of current site as string) & "/__appendfile"}"
action uses file encoding Windows-1253
appendfile
{
  line 1 of file "/tmp/Greek.txt" of encoding "Windows-1253"
}
delete "/tmp/encode.txt"
move __appendfile /tmp/encode.txt

```

Managing actions on clients with different local encoding

BigFix Platform 9.5.7 introduces the possibility to specify the names of files and folders of UNIX clients in any encoding, even if it is different from the encoding used by the BigFix server.

You can do this by specifying the corresponding hexadecimal representation (string) of the file and folder names, in a BigFix action. A set of commands that use binary strings is now available for this purpose. For example, to create a new folder having the Japanese name "" in UTF-8 encoding, you can submit an action script from the BigFix console by specifying the corresponding hexadecimal value "e3838fe383ad" as follows:

```
binary name folder create "e3838fe383ad"
```

With BigFix 9.5.5 or earlier, you can only use characters in FXF character set (character set matches to your BigFix server locale) to create files, and characters in local character set when retrieving names.

With BigFix 9.5.6, you can specify binary names and folders but not all binary actions are fully supported.

With BigFix 9.5.7, all binary actions are fully supported.

In addition to the **binary name folder create** command used in the example, depending on the actions to be completed on the client, you can use a set of commands that are documented on BigFix Developer site: https://developer.bigfix.com/relevance/reference/binary_string.html.

Chapter 3. Sample deployment scenarios

The following deployment scenarios illustrate some basic configurations taken from actual case studies. Your organization might look similar to one of the examples below, depending on the size of your network, the various bandwidth restrictions between clusters and the number of relays and servers. The main constraint is not CPU power, but bandwidth.

Pay careful attention to the relay distribution in each scenario. Relays provide a dramatic improvement in bandwidth and should be thoughtfully deployed, especially in those situations with low-speed communications. Relays are generally most efficient in fairly flat hierarchies. A top-level relay directly eases the pressure on the server, and a layer under that helps to distribute the load. However, hierarchies greater than two tiers deep might be counterproductive and must be carefully deployed. Multiple tiers are generally only necessary when you have more than 50 relays. In such a case, the top tier relays would be deployed on dedicated servers that would service from 50-200 second-tier relays. The following examples help you deploy the most efficient network layout.


Note that additional servers can also add robustness to a network, by spreading the load and supplying redundancy. Using redundant servers allows failback and failover to be automated, providing minimal data loss, even in serious circumstances.

With the correct deployment of servers and relays, networks of any size can be accommodated. Beyond the examples shown here, your HCL support technician can help you with other configurations.

Basic deployment

A simplified BigFix deployment, that points out the basic hierarchy and the ports used to connect the components, is shown in the following diagram.

There is at least one server that gathers Fixlets from the Internet where they can be viewed by the console operator and distributed to the relays. Each client inspects its local computer environment and reports any relevant Fixlets back to the relay, which compresses the data and passes it back up to the servers.

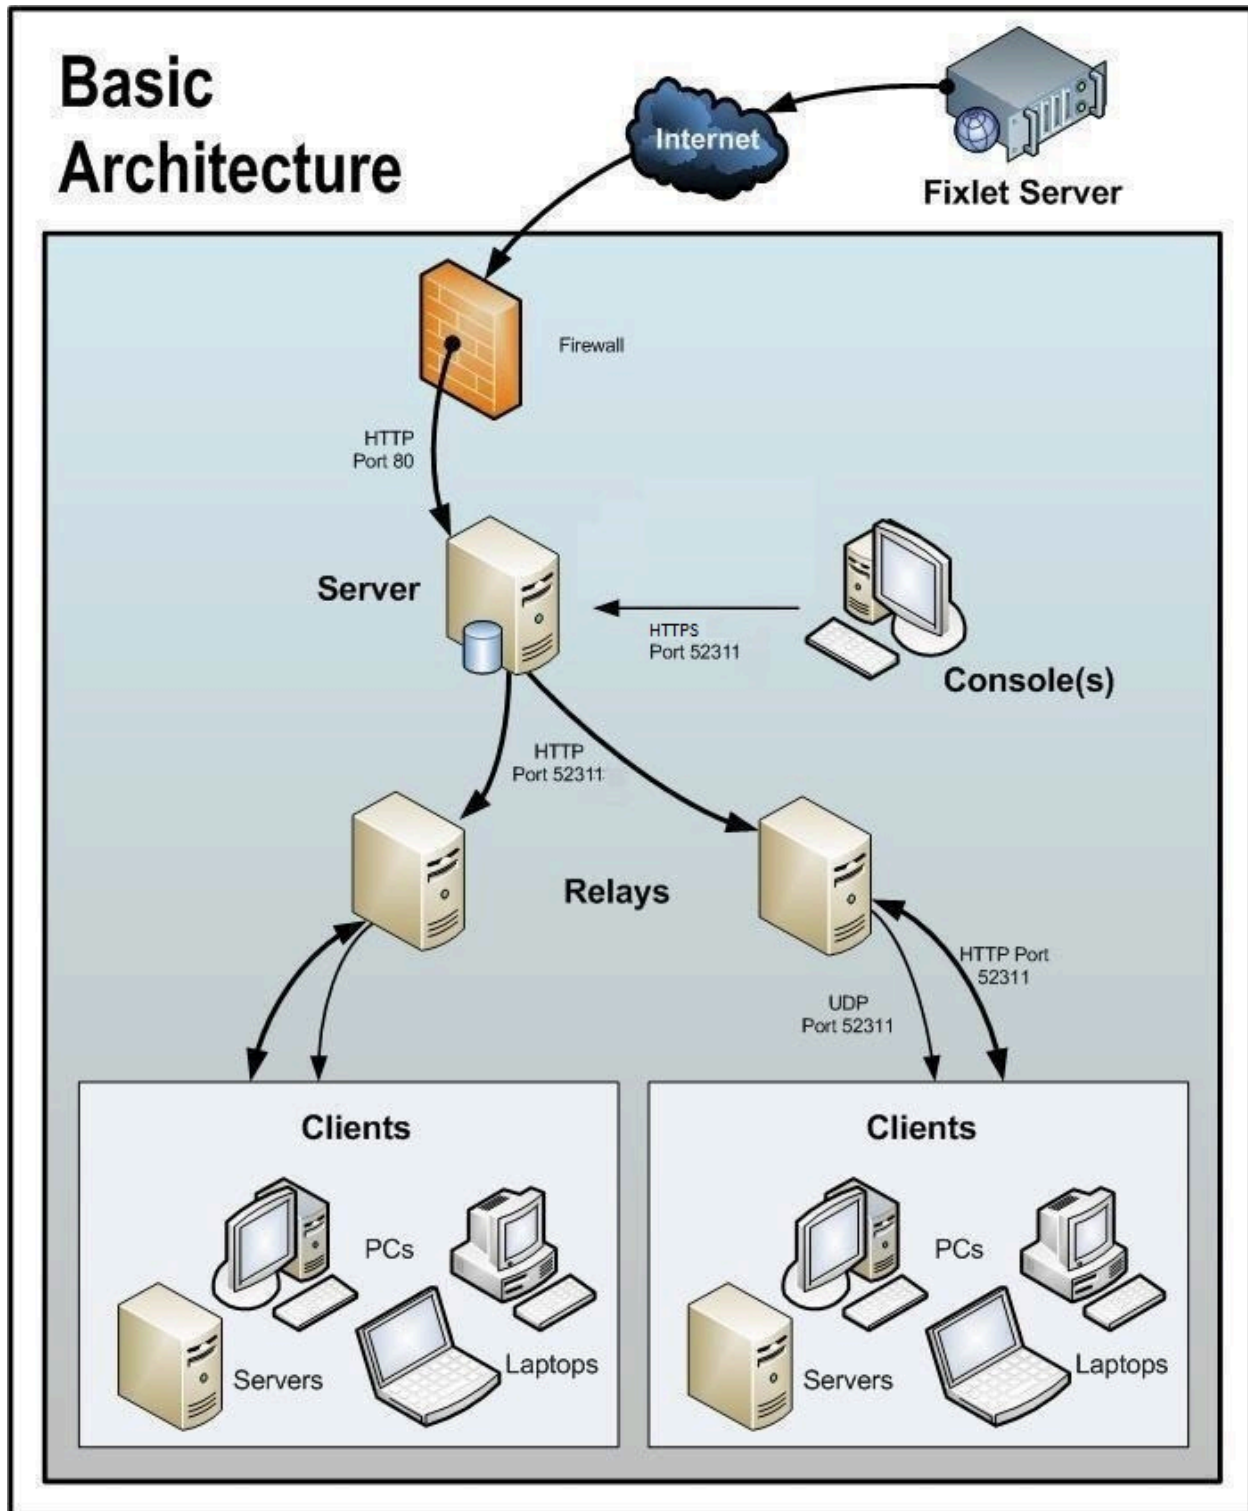

The BigFix console oversees all this activity. It connects to the Servers and periodically updates its displays to reflect changes or new knowledge about your network.

The BigFix console operator can then target actions to the appropriate computers to fix vulnerabilities, apply configuration policies, deploy software, and so on. The progress of the actions can be followed in near realtime as they spread to all the relevant computers and, one by one, address these critical issues.

This diagram labels all the default ports used by BigFix, so that you can see which ports need to be open and where. These ports were selected to avoid conflict, but if you are currently using any of these ports, they can be customized upon installation.



Note: The arrows in the diagram illustrate the flow of information throughout the enterprise. The arrows from the Fixlet server to the servers represent the flow of Fixlets into your network. Clients gather Fixlets and action information from relays. They then send small amounts of information back to the servers through the relays. The UDP packets from the relay to the clients are small packets sent to each client to inform them that there is new information to be gathered. The UDP messages are not strictly necessary for BigFix to work correctly. View the [network traffic](#) article at the BigFix support site, or ask your support technician for more details.

Note the following about the diagram:

- Port 80 is used to collect Fixlet messages over the Internet from Fixlet providers such as HCL.
- A dedicated port (defaulting to 52311) is used for HTTP communications between servers, relays, and Clients.
- A dedicated port (defaulting to 52311) is used for HTTPS communications between servers and Consoles.
- Relays are used to share the server load. This diagram only shows two relays, but you can use dozens or even hundreds of relays in a similar flat hierarchy. Typically a Relay is deployed for every 500-1,000 computers.


- The BigFix relays can also take advantage of a UDP port to alert the Clients about updates, but this is not strictly necessary.
- The BigFix Clients are typically PCs or Workstations, but can include other servers, dockable laptops, and more. Any device that can benefit from patches and updates is a candidate to include in the deployment.

BigFix has far greater flexibility and potential than this simple case suggests. It is capable of overseeing hundreds of thousands of computers, even if they are spread out around the world. The next scenarios build on this basic deployment.

Main Office with Fast-WAN Satellites

This configuration is common in many universities, government organizations, and smaller companies with only a few geographical locations.

This type of deployment is relatively easy to set up and administer because there are no (or very few) slow WAN pipes to consider.

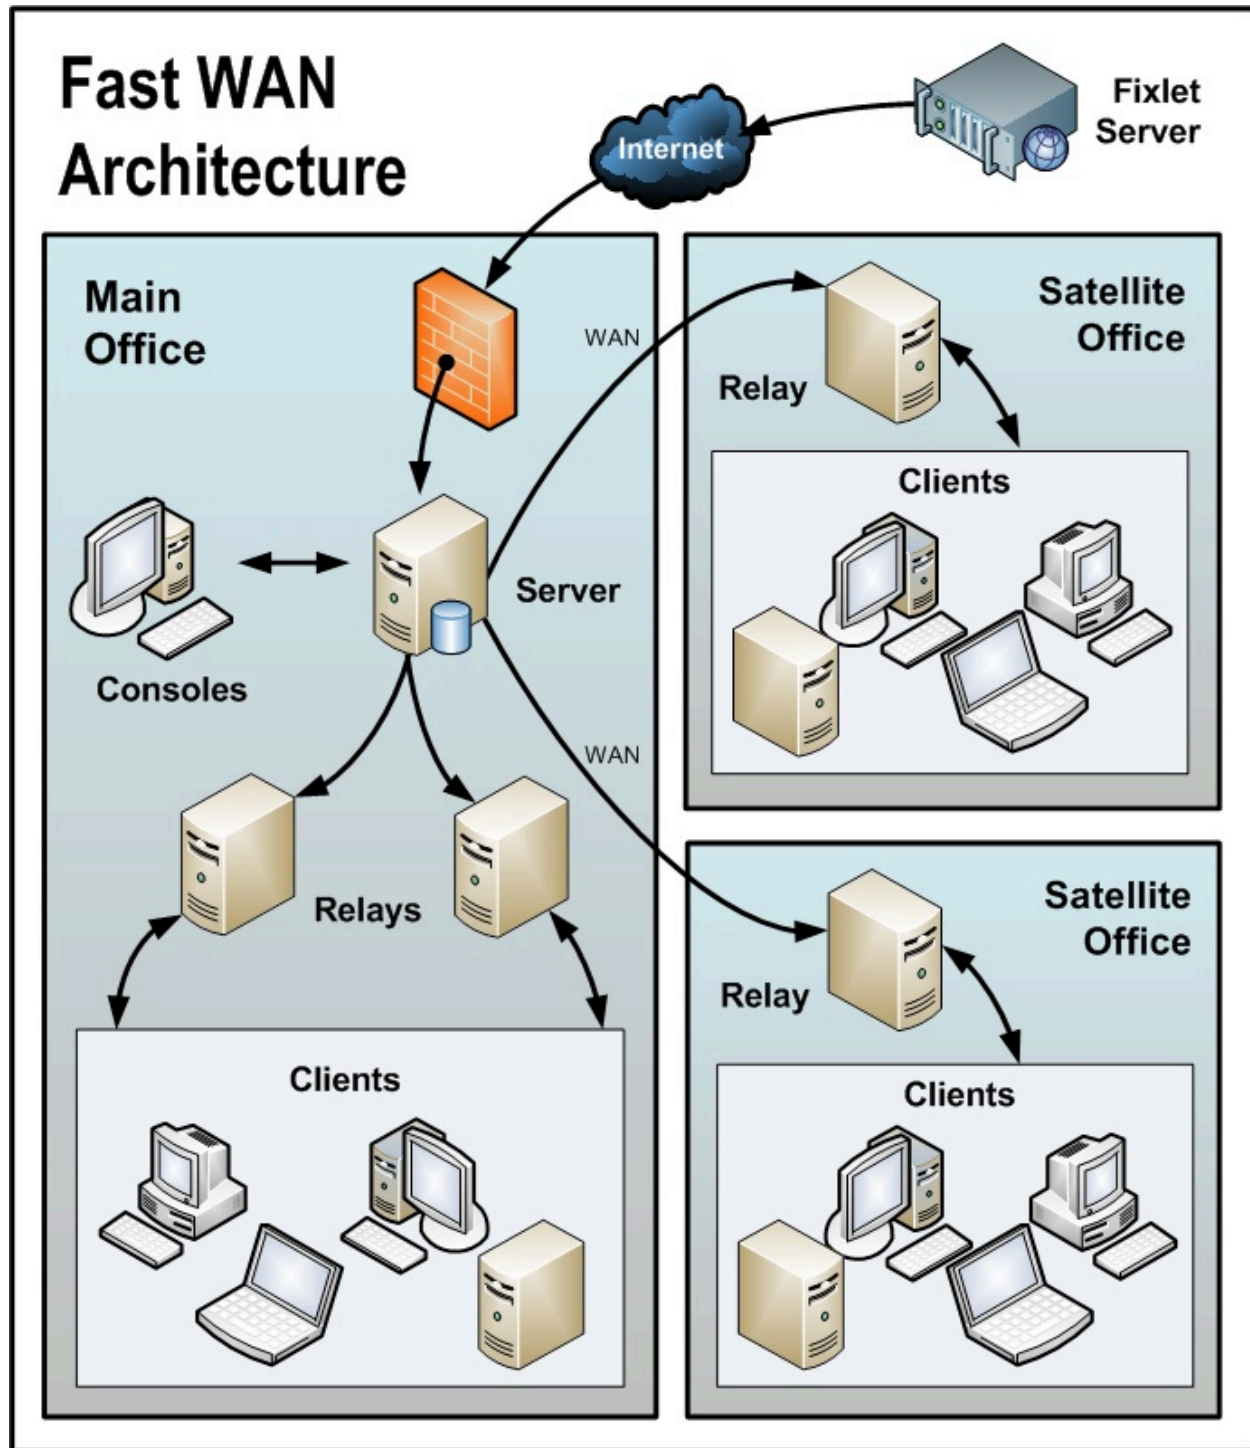

Note the following about the diagram:

- In this configuration, the relays are used both to relieve the server and to distribute the communications, optimizing the bandwidth.
- This scenario has large WAN pipes, so office relays can communicate directly with the main server. A thin WAN could force a change in the layout of the relays (see the scenarios above and below).
- The more relays in the environment, the faster the downloads and response rates.
- Because of the nature of this network, when the clients are set to **Automatically Locate Best relay**, many of the relays are the same distance away. In this scenario, the clients automatically load-balance themselves amongst all the relays that are nearby.
- For this high-speed LAN, a relatively flat hierarchy is recommended, with all relays reporting directly to the main server. Any extra levels in the hierarchy would only introduce unnecessary latency. However, if there were over 50-100 relays in this environment, another level of relays should be considered.

Disaster Server Architecture

Companies with sensitive or high availability needs might want to deploy multiple, fully-redundant servers to maintain continuous operation even in the event of serious disruptions. BigFix includes the important ability to add multiple, fully redundant servers: a feature called Disaster Server Architecture (DSA).

Each server maintains a replica of the BigFix database and can be positioned anywhere in the world. In the case of a network fracture, these servers continue to provide uninterrupted service to the local network. As soon as the connection is reestablished, the servers automatically reconnect and sync up. The BigFix relays and clients are also capable of successfully recovering from such a disconnect. DSA provides the following capabilities:

- Continued service availability on both sides of a network split (automatic failover).
- Continued availability in the event of a server outage.
- Distribution of console database load during normal operation.
- Automatic failback upon reconnecting.


To take advantage of this function, you need one or more additional servers with a capability at least equal to your primary server. All the BigFix servers in your deployment must run the

same version of SQL Server. If your existing Server is running SQL 2016, your new servers must run SQL 2016 as well.

For more information about using server redundancy, see [Using multiple servers \(DSA\)](#).

Multiple servers also help to distribute the load and create a more efficient deployment.

Here is a simple diagram of how multiple servers might be set up to provide redundancy:

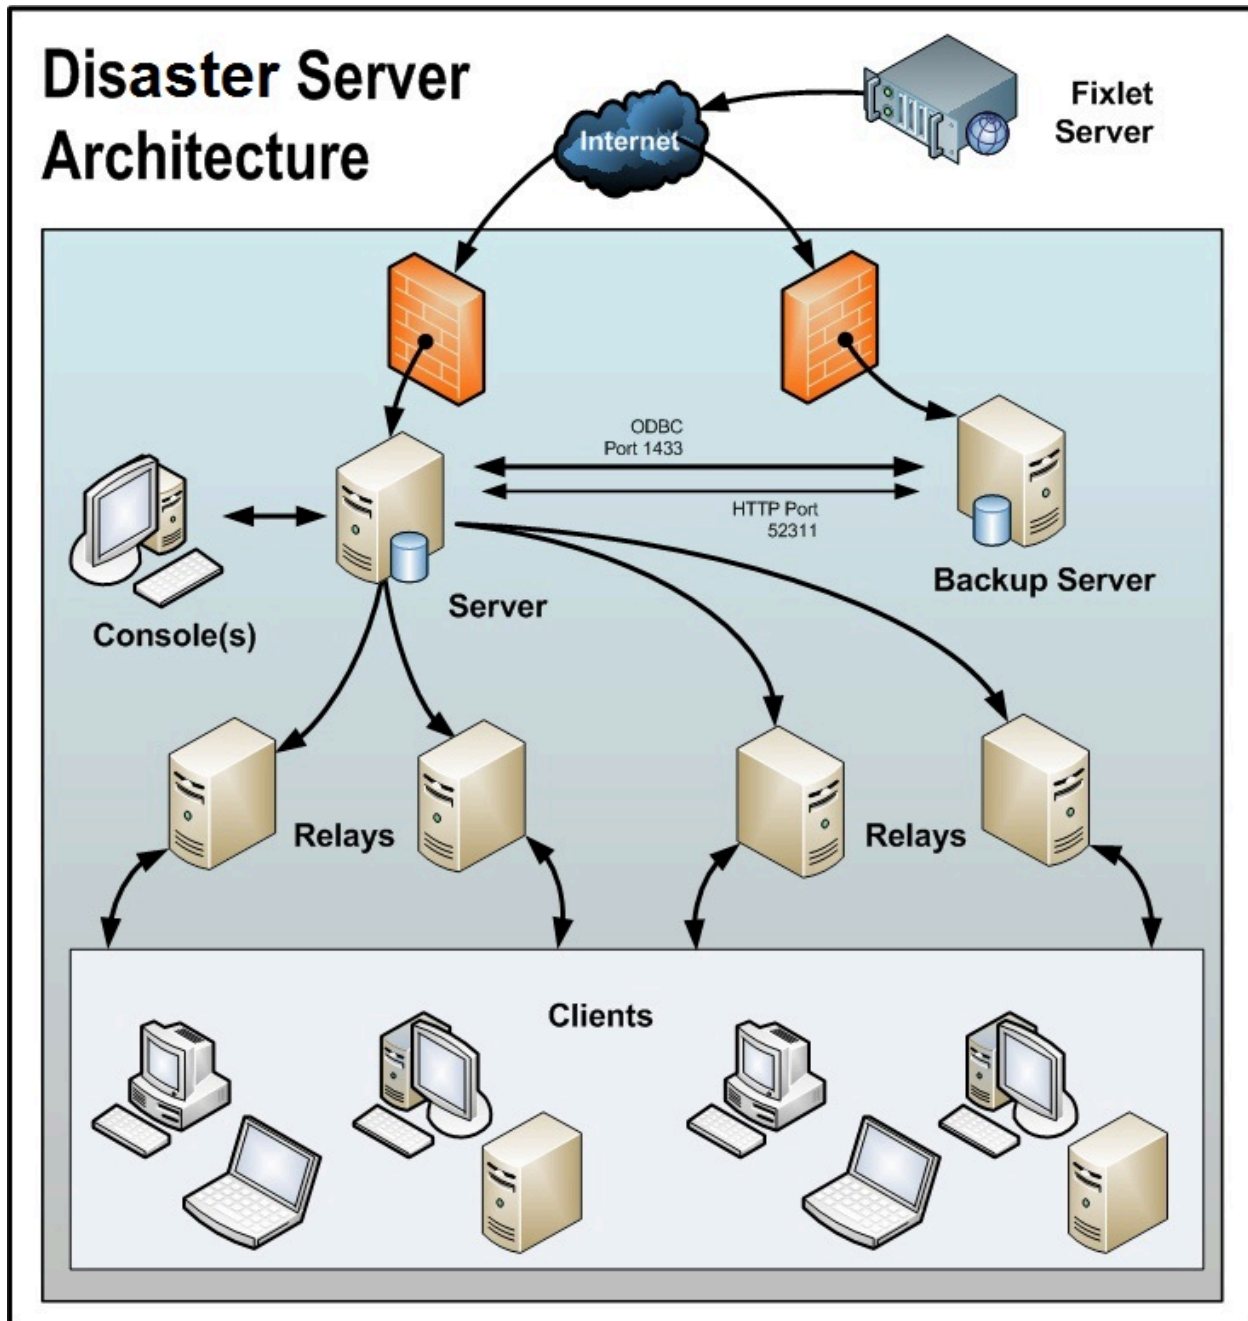

In case of a failover, the specific configured relays automatically find the backup server and reconnect the network. For more information about the relay configuration see, [Configuring relay failover](#).


Note the following about the diagram:

- The BigFix servers are connected by a fast WAN, allowing them to synchronize several times per hour.
- The servers need both an ODBC and an HTTP link to operate and replicate properly.
- There is a primary server with an ID of 0 (zero). It is the first server that you install, and it is the default server for running the BigFix Administration Tool.
- For the sake of clarity, this is a minimal configuration. A more realistic deployment would have a top-level relay and other WAN connections to regional offices.
- The BigFix servers and relays are configured so that control can be automatically routed around a server outage (planned or otherwise), and upon failover reconnection, the databases are automatically merged.
- The BigFix servers communicate on a regular schedule to replicate their data. You can review the current status and adjust the replication interval through BigFix Administration > Replication. For the best possible performance, these pipes should be FAT.
- This diagram only shows two servers, but the same basic architecture would apply to each additional server. With multiple servers, a shortest-path algorithm is used to guide the replication.
- When an outage or other problem causes a network split, it is possible for a custom Fixlet or a retrieved property to be modified independently on both sides of the split. When the network is reconnected on failover, precedence goes to the version on the server with the lowest server ID.

Efficient relay setup

To increase efficiency and reduce latency, this company has set up a hierarchy of relays to help relieve the server load.

Each relay they add takes an extra burden off the server for both patch downloads and data uploads. Setting up relays is easy, and the clients can be set to automatically find the closest relay, further simplifying administration.

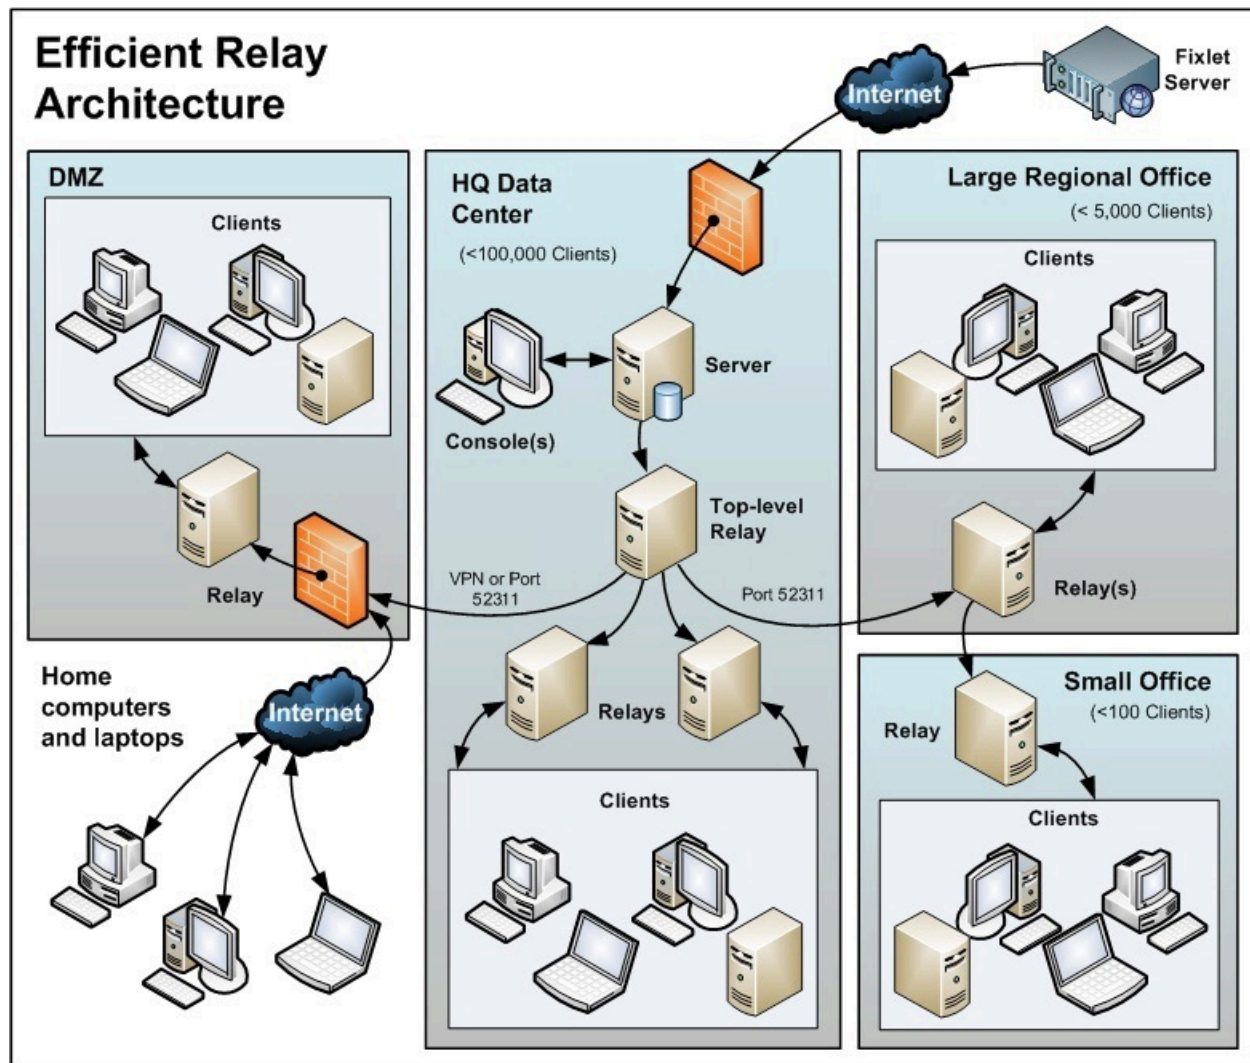

Note the following about the diagram:

- There is a dedicated server computer known as the Top-Level relay that is used to take the load off the server computer.
- All relays are manually configured to point to either the top level relay or to another relay that is closer. The general rule for configuring relays is that you want as

few levels as possible to the relays unless there is a bandwidth bottleneck.

Communications over thin pipes should be relay to relay. The top-level relay relieves the server, and the secondary relay allows a single download to be distributed over hundreds of clients.


- There is a relay in the DMZ set up with a special trust relationship with the server. This relay allows clients in the DMZ or on the public Internet to be managed by BigFix. The DMZ places a security firewall between the relay and the set of home computers and laptops reporting in from the Internet.
- This diagram shows a single relay in the large regional office. However, for offices with more than a few hundred clients, there will typically be multiple relays to effectively distribute the load.
- As a general rule, you should deploy at least one relay per 500-1000 clients to maximize the efficiency of the relay.

Hub and spoke

This scenario involves a main data center, a small number of large regional offices, and many small regional offices.

This configuration is common in large international organizations. The BigFix clients are installed on computers in offices all around the world. Many of these locations have slow WAN connections (8 kbps-512 kbps), but there are many offices with faster WAN connections (1mbps-45mbps).

Hub and Spoke Architecture

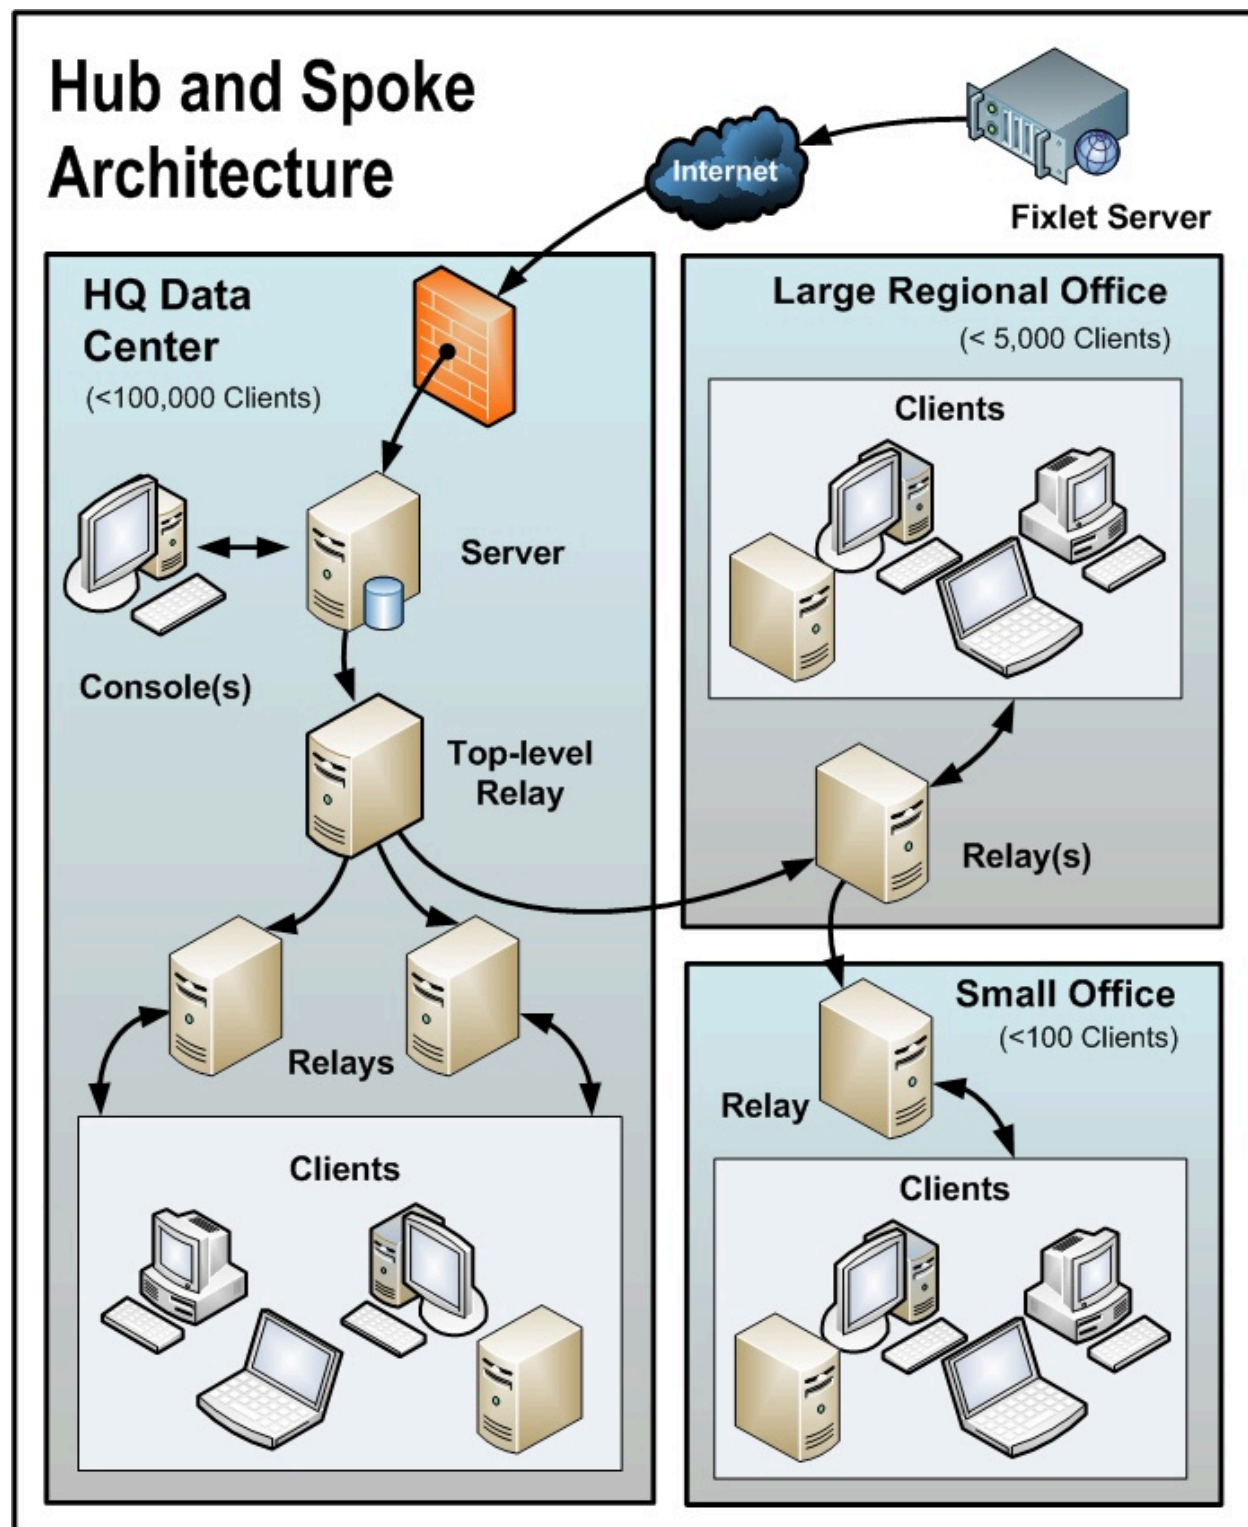

Often these locations are configured in a hub-and-spoke arrangement. This scenario builds on the previous one, but the hub-and-spoke configuration permits more levels in the relay hierarchy.

Note the following about the diagram:

- In this scenario, the relays are carefully deployed at the proper junctions within the WAN to optimize bandwidth. Poor placement of relays can adversely impact your network performance.
- It is vital that at least one relay is installed in every location with a slow WAN connection. Often a company already has a server in just such a location, acting as a file server, print server, AV distribution server, SMS distribution server or domain controller, or any other computer. The BigFix relay is usually installed on these existing computers.
- To provide redundancy in a typical office, more than one relay should be installed. If a relay fails for any reason (powered down, disconnected from the network, and so on.), its attached clients can then automatically switch over to a different relay. A redundant relay is less important in very small offices because fewer computers are affected by the failure of a relay.
- When the clients are set to **Automatically Locate Best Relay**, they will choose the closest one. If any relay fails, the clients automatically seek out another relay. You should monitor the relay configuration after the initial automated setup (and periodically after that) to ensure that the clients are pointing to appropriate locations. Talk to your support technician for more details about how to protect against overloading WAN pipes with BigFix data.
- Bandwidth throttling at the relay level is very helpful in this configuration. The BigFix relays are set up to download slowly across the WAN pipes so as not to saturate the slow links. For more information, see <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Bandwidth%20Throttling>.
- Instead of pointing to the main server, the relays are configured to point to the top level relay. This frees up the server to couple more tightly to the console and improves reporting efficiency.


The BigFix relays are configured to manually create the optimal hierarchy. The hierarchy has three levels (from the top down):

1. The top-level relay that connects directly to the server.
2. The regional office relays that connect to the top-level relay.
3. Multiple branch office relays that connect to specified regional office relays.

Remote Citrix / Terminal Services Configuration

Although BigFix can efficiently deliver content even over slow connections, the console itself is data-intensive and can overwhelm a link slower than 256 kbps. Adding more Clients further increases the lag time.

However, you can access the console remotely from a Citrix, Windows Terminal Server, VNC or Dameware-style presentation server and realize excellent performance. Here is what this configuration looks like:

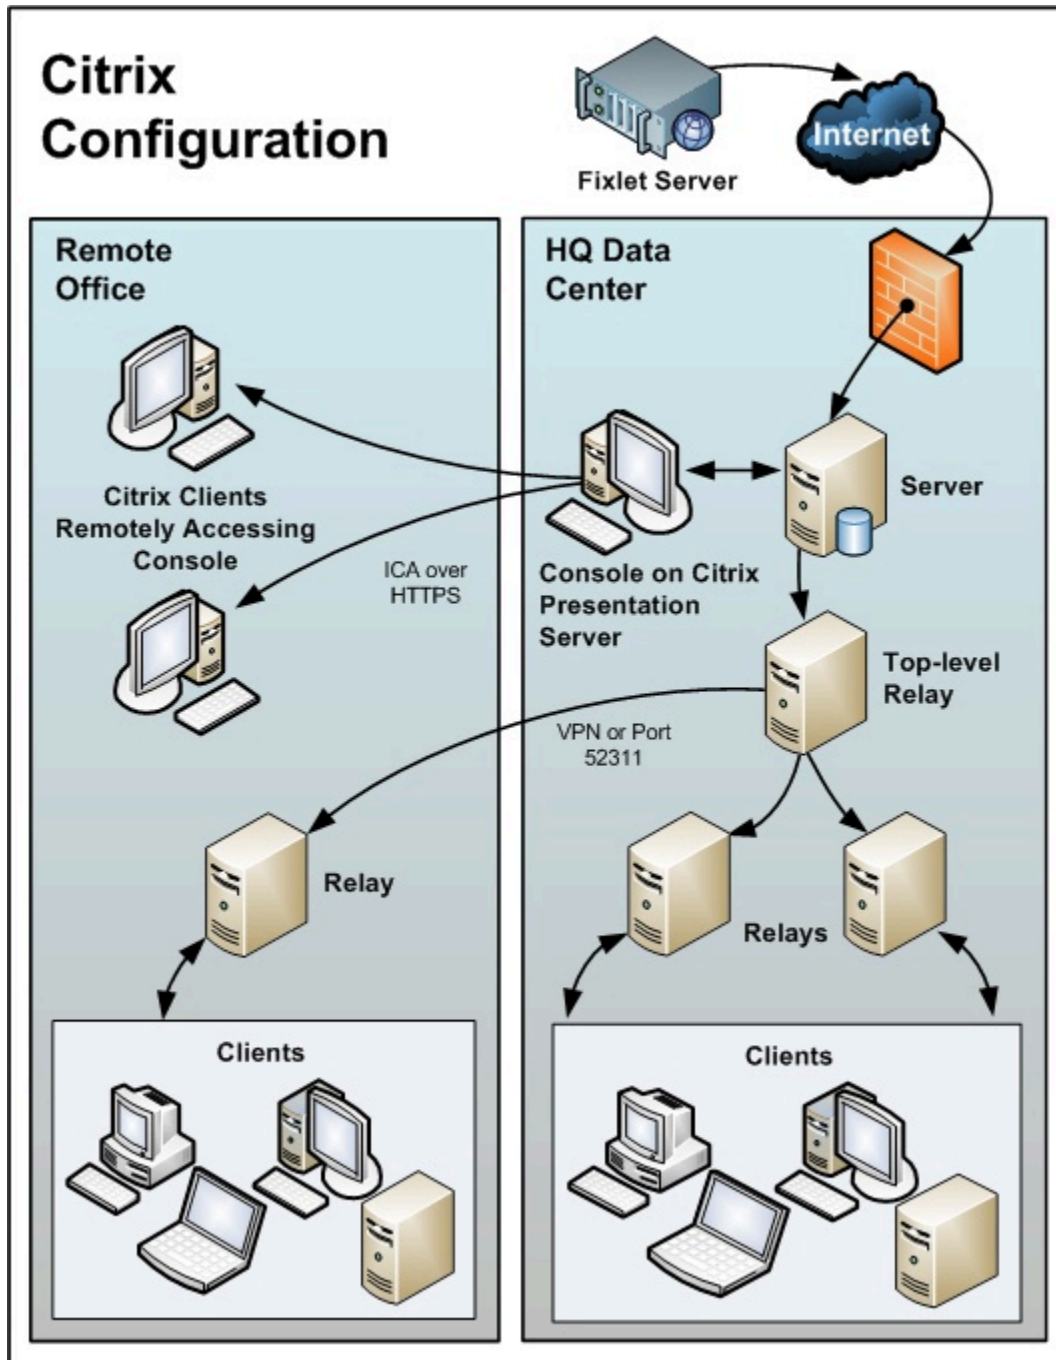

Note the following about the diagram:

- In the main office, the console is set up on a computer that is close to the server for fast data collection. This is your Presentation server.
- You must create user accounts for each remote user. These users can then access the console quickly because the time-critical data loading is done at the main office over a fast link.
- Your remote connection can be over HTTPS to improve security.
- Note that running a console from a Presentation server containing the private key is inherently less secure than if the key is stored on a removable drive.
- You might be able to benefit from load-balancing software to spread the remote accesses across multiple servers.
- The main bottleneck for a console running on Citrix is memory size. If the console runs out of memory, its performance decreases sharply. A good technique to determine the memory requirement is to open the console as a Master Operator. Check the memory used: this indicates the maximum memory requirement per user. Then log in as a typical operator and use this as your average memory requirement. If your Citrix server can support all concurrent users with the maximum memory then a single box suffices. If not, then use the average memory requirement per user to determine how many extra Citrix servers you might need.
- The second constraint is CPU power. During refreshes, the console works best with a full CPU core. This means the Presentation server will be optimized with one CPU core running the console for each concurrent user.
- The final concern is disk space for the console cache. You can understand the size of the cache by looking at an example on your local computer: C:\Documents and Settings\<USERNAME>\Local Settings\Application Data\BigFix\Enterprise Console\BES_bfenterprise. There should be enough disk space to provide one cache file for each console operator.

Chapter 4. Requirements and assumptions

BigFix runs efficiently using minimal server, network, and client resources.

The hardware required by the server and the console depends on the number of computers that are administered and the total number of consoles. The distributed architecture of BigFix allows a single server to support hundreds of thousands of computers.

Server requirements

To find the latest information about the server requirements, see Detailed system requirements.

Notes about Windows operating systems:

- Starting from V9.2 Patch 3, only the 64-bit architecture is supported for installing the BigFix server and Web Reports components on Windows systems.
- The Windows firewall can be either turned off or configured to open the following two ports:
 - Port 52311 for UDP and TCP/IP
 - Port 8083 for Web Reports and TCP/IP

User Account Control on Windows 2008 and Windows 2008 R2 must be disabled or lowered so that services that do not run as LOCAL SYSTEM are not interfered with by the User Account Control pop-up messages.

- Windows BigFix servers cannot be migrated to Linux BigFix servers.
- Since the May 2023 WebUI update, the WebUI component can be installed on Windows Server 2016 or Windows Server 2019.

Notes about Linux operating systems:

- IBM DB2 10.5 / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9. For information about how to install DB2 server on Red Hat Enterprise Linux Server 64-bit see [Installing and configuring DB2 \(on page 157\)](#).
- Red Hat packages required by BigFix Linux server and Web Reports components:

- `cyrus-sasl-lib.x86_64`
- `libstdc++.x86_64` and all their prerequisites
- `pam.x86_64`
- `krb5-libs.x86_64`
- `unixODBC.x86_64`
- `fontconfig.x86_64` (Web Reports only)
- `libXext.x86_64` (Web Reports only)
- `libXrender.x86_64` (Web Reports only)
- `zlib.x86_64` (Web Reports only)
- `libpng12.x86_64` (RHEL 7 only)
- `numactl.x86_64` (embedded DB2 installations only)
- `pam.i686` (embedded DB2 installations only)
- `libstdc++.i686` (embedded DB2 installations only)

For the Red Hat 6 operating system, it is recommended to install `unixODBC` package version higher than 2.2.14.

- Since the May 2023 WebUI update, the WebUI component can be installed only on Red Hat Linux 8 (64-bit).

Minimum disk space requirements to install BigFix server and Web Reports on Linux:

BigFix Server: 400MB; DB2: 1GB (6GB recommended)

BigFix Web Reports: 200MB; DB2: 700MB

This is the disk space used in each file system for installing the server components:

- 160 MB in `/var`
- 240 MB in `/opt`

This is the disk space used in each file system for installing the Web Reports components:

- 170 MB in `/var/opt/BESWebReportsServer`
- 30 MB in `/opt/BESWebReportsServer`

Console requirements

To find the latest information about the console requirements, see Detailed system requirements.

The BigFix console can be installed on a laptop or any moderately-powerful computer. However, as the number of computers that you are managing with the console increases, you might need a more powerful computer.

The BigFix console also requires a high bandwidth connection (LAN speeds work best) to the server due to the amount of data that needs to be transferred to the console. If you need to remotely connect to the server across a slow bandwidth connection, it is recommended that you use a remote control connection to a computer (such as a Citrix server or Terminal Services computer) with a high-speed connection to the Server.

Contact your support technician for more information about console scaling requirements.



Note: The console is the primary interface to BigFix and manages a great deal of information about the clients. If the console computers are underpowered or on a slow connection, it can adversely impact performance.



Note: On Windows systems the BigFix V9.5 console component supports only the 64-bit architecture.

Client requirements

To find the latest information about the client requirements, see Detailed system requirements.

If you are using BigFix Inventory, before storing scan uploads, see [Hardware requirements for the client](#).

Windows

On Windows systems, ensure that the BESClient service runs as the SYSTEM account.

Linux

On Red Hat Enterprise Linux™ 6 or later, ensure that you have installed the Athena library (libXaw package) before installing the client.

On Red Hat Enterprise Linux™ 9, ensure that you have installed the initscripts package before installing the client.

On CentOS 8, ensure that you have installed the Athena library (libXaw package) before installing the client.

On SUSE Linux Enterprise Server (SLES) 11 PPC64, ensure that you have installed the rpm-32bit package before installing the client.

On SUSE Linux Enterprise Server (SLES) 15 x86_64, ensure that you have installed the insserv-compatible rpm package before installing the client.

Mac

On Mac OS Mojave Version 10.14 or later, some default security settings restrict access to certain folders in the user's library which in turn might affect the behavior of custom content.

Inspectors interacting with files and directories associated with the following artifacts are impacted:

- Location
- Contacts
- Photos
- Calendar
- Reminders
- Camera
- Microphone
- Mail database
- Message history
- Safari data
- Time Machine backups
- iTunes device backups

- Locations and routines
- System cookies

To avoid access-related issues, do the following steps:

1. Go to the **Privacy** pane of **Security & Privacy** preferences.
2. Select **Full Disk Access**.
3. Add the BESAgent application.

Disk space requirements

Ensure that your targets have enough disk space before you start installing the BigFix client. The following table displays the disk space requirements for installing the BigFix client on the different operating systems.

OS	Directory	Space required	Description
Windows	C:\Program Files (x86)\BigFix Enterprise\BES Client	50 MB	Client Data and Installation Directories
Linux Intel & zLinuz	/var/opt/BESClient	20 MB	Client Data Directory
	/opt/BESClient	75 MB	Client Installation Directory
Linux PPC	/var/opt/BESClient	20 MB	Client Data Directory
	/opt/BESClient	100 MB	Client Installation Directory
AIX	/var/opt/BESClient	20 MB	Client Data Directory
	/opt/BESClient	115 MB	Client Installation Directory

OS	Directory	Space required	Description
Solaris	/var/opt/BESClient	20 MB	Client Data Directory
	/opt/BESClient	85 MB	Client Installation Directory
Mac	/Library/Application Support/Bigfix	45 MB	Client Data Directory
	/Library/BESAgent	50 MB	Client Installation Directory

Database requirements

The database stores all the data retrieved from the clients. Before installing the BigFix server, ensure that the database requirements are met.

A pre-upgrade check Fixlet is available to perform a set of checks to verify if the BigFix server can be successfully upgraded to V9.5.X. A log file is created in the BigFix server directory containing details about the executed steps. If these checks fail, a `preupgrade-Version 9.5.X-<datetime>.err` log file is created in the BigFix server directory. If these checks end successfully, a `preupgrade-Version 9.5.X.out` log file is created in the BigFix server directory. X is the modification level. This task is not relevant only when all the checks are completed successfully.

- The BigFix server on Windows systems supports the following configurations:
 - Local or remote Microsoft SQL Server 2008, 2008 R2, 2012, 2014 or 2016.



Note: When installing BigFix in a production environment, Microsoft SQL Server Enterprise and Standard are recommended. The Express edition might be used for very small deployments. Refer to Microsoft documentation to choose the best database for your deployment.



Important: When installing or upgrading BigFix, the user account performing the installation or upgrade must have `sysadmin` server role in SQL Server. When working with a remote instance of SQL Server, the AD domain service account must have `dbo` rights, that is `db_owner` on the `BFEnterprise` and `BESReporting` databases. Start with `sysadmin` server role to perform the installation or upgrade, then back off the privileges to `db_owner` after the product is up and running.



Important: When working with SQL Server, ensure that you satisfy the following prerequisites for the Microsoft SQL database collation:

- The database collation must be case insensitive.
- The database collation at the server, database and column level must be set to the same value.

To verify the collation, run the following SQL Server queries:

At the SQL server instance level

```
SELECT ServerProperty('Collation')
```

At the database level

```
SELECT
DatabasePropertyEx('BFEnterprise','Collation')
```

```
SELECT
DatabasePropertyEx('BESReporting','Collation')
```

At the column level in the BFEnterprise and BESReporting databases

```
SELECT C.name, O.name, C.collation_name
from BFEnterprise.sys.columns C,
BFEnterprise.sys.all_objects O
where C.collation_name is not NULL
```



```

and C.object_id = 0.object_id

and ( 0.schema_id = ( SELECT SCHEMA_ID( 'dbo' ) ) )

or 0.schema_id = ( SELECT
SCHEMA_ID( 'webui' ) ) )

SELECT C.name, 0.name, C.collation_name

from BESReporting.sys.columns C,
BESReporting.sys.all_objects 0

where C.collation_name is not NULL

and C.object_id = 0.object_id

and ( 0.schema_id = ( SELECT
SCHEMA_ID( 'dbo' ) ) )

```



Important: The database compatibility level for BFEnterprise and BESReporting must be at least 100.



Note: On Windows systems, the SQL Server Native Client driver is a prerequisite.



Note: The database passwords must not contain the characters '{' or '}', otherwise the installation might fail.

- The BigFix server on Red Hat Enterprise Linux systems supports the following configurations:

- If the DB2 server is installed locally: DB2 V10.5 Enterprise Server Edition / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition 64-bit or DB2 10.5 Workgroup Server Edition 64-bit.
- If the DB2 server is installed remotely: IBM Data Server client V10.5 / V11.5 GA.

To check if you have a server or a client installed and to verify the DB2 edition, you can run the `db2licm -l` command. On the computer where the DB2 server is installed, you receive a detailed report, if only the client is installed you receive an empty report. To check which DB2 version is installed, run the `db2level` command.



Note:

- After installing a deployment, the DB2 instance name used to connect to the database can no longer be modified. The default name is `db2inst1`.
- The DB2 instance name with which BigFix connects to both BigFix Server and Web Reports databases must have the following privileges:
 - The SYSADM privilege during the phase of installation.
 - The DBADM privilege during the phase of upgrade.
 - The DATAACCESS privilege at run time.
- Ensure that you meet the following required database configurations needed to install/upgrade BigFix:
 - LOGFILSIZ must have a minimum value of 10240.
 - LOGPRIMARY must have a minimum value of 10.
 - LOGSECOND must have a minimum value of 100.
 - AUTO_REORG must be set to ON.
- Ensure that you have stopped all BigFix services and you have closed all connections to the BFENT database. To verify if you have successfully done these operations, run the following command:

```
db2 list applications for db BFENT
```

It should return the following output:

```
SQL1611W No data was returned by Database System Monitor.
```



- The DB2 instance names used to install the BES Root Server cannot contain the following special characters: blanks, tabs `\t`, returns `\n` and `; & | " ' < >`
- The database passwords cannot contain the following characters: blanks, tabs `\t`, returns `\n` and `; & | " ' < > %`
- To successfully install the BigFix server on Linux systems, ensure that you unset the DB2 registry variable `DB2_COMPATIBILITY_VECTOR`. This variable should be set to null.



Note: Do *not* change the name of BigFix databases; if you do, upgrades might fail.

For more information about the supported database versions, see Detailed system requirements.

Security requirements

The system authenticates all Fixlets and actions using secure public-key infrastructure (PKI) signatures. PKI uses public/private key pairs to ensure authenticity.

Before installing BigFix, you must run the Installer on Windows and the script `install.sh` on Linux to generate your own **private key** and then apply to HCL for a signed certificate containing your **public key**. Your private key (which only exists on your computer and is unknown to anyone else, including HCL) is encrypted by a password of your choosing, so if someone steals it, they still need to know your password to be able to use it. Nevertheless, guard it well. **Anyone who has the private key and password for your site, access to the server, and a database login will be able to apply any action to your Client computers.**

Treat your private key just like the physical key to your company front door. Do not leave it lying around on a shared disk. Instead, store it on a removable disk or a secured location and **do not lose it**. In the physical world, if you lose your master key you have to change all the locks in the building. Similarly, if you lose your digital key, you will need to do a migration to a new authorization key or a fresh installation of the entire system (including all the Clients). It is not unreasonable to store a backup copy of your site level key files in a secured safe deposit box.

During the installation process a server signing key is created and stored as a file on the server machine. Whenever operators issue an action, it is digitally signed by the server signing key, and the client will only trust actions that are signed by that key. Since clients will trust any action signed by the server signing key, it is important to protect the server signing key file. To protect the server signing key file, administrator access to the server machine must be restricted.

Fixlets are also digitally-signed. The Fixlet site author signs each message with a key that can be traced back to the BigFix root for authentication. This signature must match the Fixlet sites masthead, which is placed in the Client install folder when subscribing to the site. This procedure prevents spoofing and man-in-the-middle attacks, and guarantees that the Fixlets you receive are from the original certified author.

There are a few other security-related issues to address before installing BigFix in your organization:

- Make sure the server computer is running Windows Server 2008+ 64 bit with the latest Service Pack available from Microsoft.
- Make sure that the SQL Server is secured with the latest security-related patches.
- Make sure that TCP/IP and UDP on the specified port (default value is 52311 for all the components, included the console) is completely unblocked at all internal routers and internal firewalls.
- Verify that your external router forbids inbound and outbound traffic on the specified port (default value is 52311 for all the components) so that BigFix-related traffic will be unable to flow into or out of your network.

You can administer roaming laptops by putting an authenticating relay in your DMZ. .

- Verify with your network administrator that you can allow the server to access the Internet via port **80**. The BES Root Server service on Windows and the beserver service on Linux access the Internet and by default they run as the SYSTEM account on Windows and as root on Linux.



Note: In your environment, if you reach the Internet through a proxy configure the connection as described in [Setting up a proxy connection \(on page 420\)](#).



If you have firewall restrictions, see [Configuring a Local Firewall \(on page 89\)](#).

To maintain a physical disconnect from the Internet see Downloading files in air-gapped environments the Configuration Guide.

- Secure the server computers and the SQL database using company or industry-wide standards. Contact your network administrator or database administrator for more information.



Note: Certain rare lock-down procedures might cause the servers to function incorrectly. Contact your HCL software support if you have any specific questions about lock-down procedures.

Secure the client computers by using company- or industry-wide standards; applying the Principle of Least Privilege (PoLP) is recommended.

For best results on Windows systems, do the following:

- Keep the UAC feature enabled always.
- Avoid setting up user accounts with local administrative privileges.
- Ensure restricted access to the system directory paths (for example, Windows, System32, Program Files (x86), Program Files). Prevent local users from accessing these locations.

Network configuration requirements

The following network configuration is recommended for security and performance reasons:

- All internal network communication is on one specified port (52311 is the default port for all the components, including the console) to allow for simplicity and flexibility of deployment. TCP/IP and UDP on this port must be completely unblocked at all internal routers and internal firewalls (you can optionally disable UDP, but that might negatively affect performance).

- The BigFix server should connect to the network at 100 mbps or higher.
- Consoles should have high speed connections to the BigFix server (100 mbps or higher)
- The BigFix client must be installed on the BigFix server machine.

These networking recommendations are typically easy to satisfy for most organizations maintaining a moderate security posture. For information about larger installations, see [Deployment Scenarios \(on page 44\)](#).

The BigFix Server requirements and performance can also be affected by other factors in addition to the number of clients. These factors include:

The number of console operators

Multiple console operators can connect to the servers at the same time to manage subsets of the networked computers. Some deployments can have hundreds of operators. If you plan to have more than 30 operators, you might want to have a more powerful Server to support the additional load.

Relays

Use to lighten the load on the servers by accepting connections from clients and then forwarding the data to a server. In most deployments, very few clients report directly to the main Server.



Note: To improve performance, you can connect from 500 to 1000 clients to each relay and use a parent child relay configuration.

The number and type of Retrieved Properties and Analyses

Custom-Retrieved properties and analyses can provide extremely useful data, but if custom properties are poorly implemented or overused, they can also create undue load on the system by requiring too much bandwidth or too many client resources. For example, it would be unwise to create a custom-retrieved property that returned the names of every file on every computer, due to the load on the client computers and the network.

For more information about these issues, see <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Performance%20Configuration>.

Assumptions

The process of getting the BigFix up and running varies, depending on your network environment and your security policies.

This guide focuses on a standard deployment, which applies to workgroups and to enterprises within a single administrative domain. For the sake of readability and generality, this guide assumes these restrictions:

- BigFix servers can make connections to the Internet on port 80. The BigFix server can be set up to use a proxy, which is a common configuration. For more information see [Setting up a proxy connection \(on page 420\)](#). Alternatively, an air-gap can be used to physically separate the BigFix server from the Internet Fixlet server. For more information, see the *Configuration Guide*.
- Each BigFix server must have access to the SQL server, located locally on the server machine or remotely on a separate SQL Server.
- Each console operator can make an HTTP connection to the BigFix server.
- Each BigFix client computer in the network must be able to make an HTTP connection to a server or relay on the specified port (the default port is 52311, but any available port can be used).
- Each console in the network must be able to make an HTTPS connection to a server on the same port as the clients (default value is 52311).
- The BigFix components (server, relays, WebReports) must be installed on systems whose hostname contains only ASCII characters.
- The installation paths of BigFix components must contain only ASCII characters.

Some enterprises might not meet one or more of these conditions, but can still deploy BigFix in their environments.

For more information, see [Sample deployment scenarios \(on page 44\)](#).

If your network configuration does not match any of the described scenarios, contact a support technician for more options.

The initial deployment of a minimal BigFix system (server, console, and a few clients) takes about one hour to complete.

When you are ready to install the full system, pay extra attention to the sections in this document on client and relay deployment, to ensure an efficient rollout.

Several steps in the BigFix installation depend on the completion of prior steps. For this reason, it is recommended that you follow this guide in the order presented.

Chapter 5. Types of installation

Before you install the product, decide if you want to do an evaluation or production installation.

If you choose the evaluation installation, you do not need to buy a license. You can install a trial BigFix Server on your own and use it for a period of 30 days.

If you choose the production installation, you must purchase a license. When you receive your BigFix license authorization file, you are ready to create a personalized **action site masthead** that, in turn, allows you to install and use BigFix.

The masthead includes URLs for the Server CGI programs and other site information in a signed MIME file. The masthead is central to accessing and authenticating your action site and is linked to the hostname or IP address of the server machine.

Evaluation installation

When you run the evaluation installation, you do not need to buy any license files from HCL. The evaluation installation configures BigFix as a Try and Buy product, so you can try it first and buy a license later.

The trial product has the following limitations:

- A license expiration of 30 days
- A license allocation of 1000 clients
- A predefined set of allowed sites. You can enable the desired sites after completing the evaluation installation.

When you install BigFix in evaluation mode, the installation wizard collects the information required to request an evaluation BigFix license to HCL, and creates an evaluation masthead that entitles your organization to use BigFix. You must specify the correct data which is needed if you want to convert your server evaluation license into a production license.

You must generate the license on a machine with network connectivity. You can then use this evaluation license the same way you would use a production license.

If you are generating an evaluation license for a server that is located in an airgapped environment, stop the current installation and copy the generated `license.crt` and `license.pvk` files from the local machine to the isolated server. Restart the installation on that server by choosing type "Production" and selecting the files you copied previously.

After an Evaluation installation, a user named `EvaluationUser` is created to log on both the BigFix console and BigFix Web Reports.

If you need an evaluation time longer than 30 days, contact the sales support to arrange a limited production license.

It is possible to convert the evaluation installation to a production installation. For additional information see [Moving from evaluation installation to production installation \(on page 75\)](#).



Note: The evaluation installation does not support the enhanced security option. For more information about this feature, see Security Configuration Scenarios.



Note: A supported version of Microsoft SQL Server must be installed on the system prior to launching the evaluation installation.

Production installation

If you purchased a license from HCL, you can perform a production installation.

After the production installation, a user (default name is `BFAAdmin`) is created to logon to the BigFix Console and BigFix Web Reports.


Moving from evaluation installation to production installation

You can install and configure a BigFix environment in evaluation mode and later decide to upgrade the environment to production by converting the evaluation license to production without reinstalling the entire environment.


After you install in evaluation mode you can decide to:

- Let the evaluation license expire. When the evaluation license expires the environment will stop working.
- Upgrade the evaluation license to production without reinstalling the environment from scratch. You must ask for a license update from evaluation to production.

From the License Overview dashboard check for any license updates:

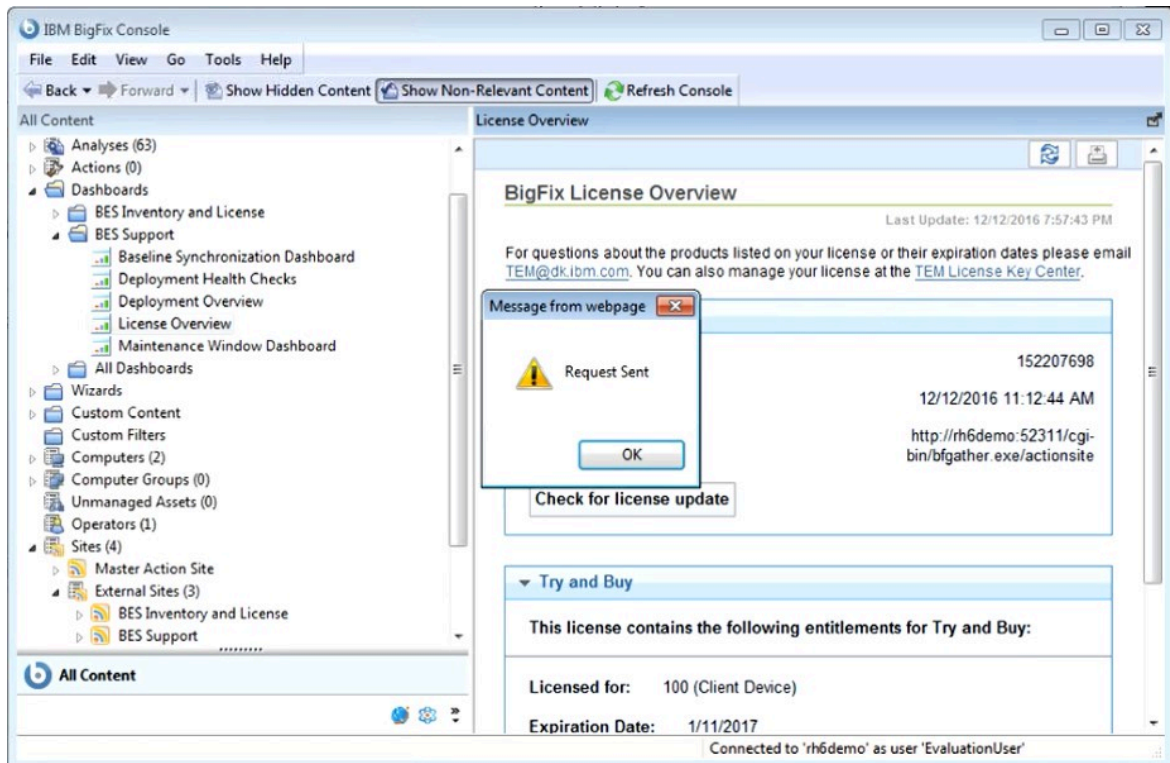

Run the BESAdmin to propagate the change:

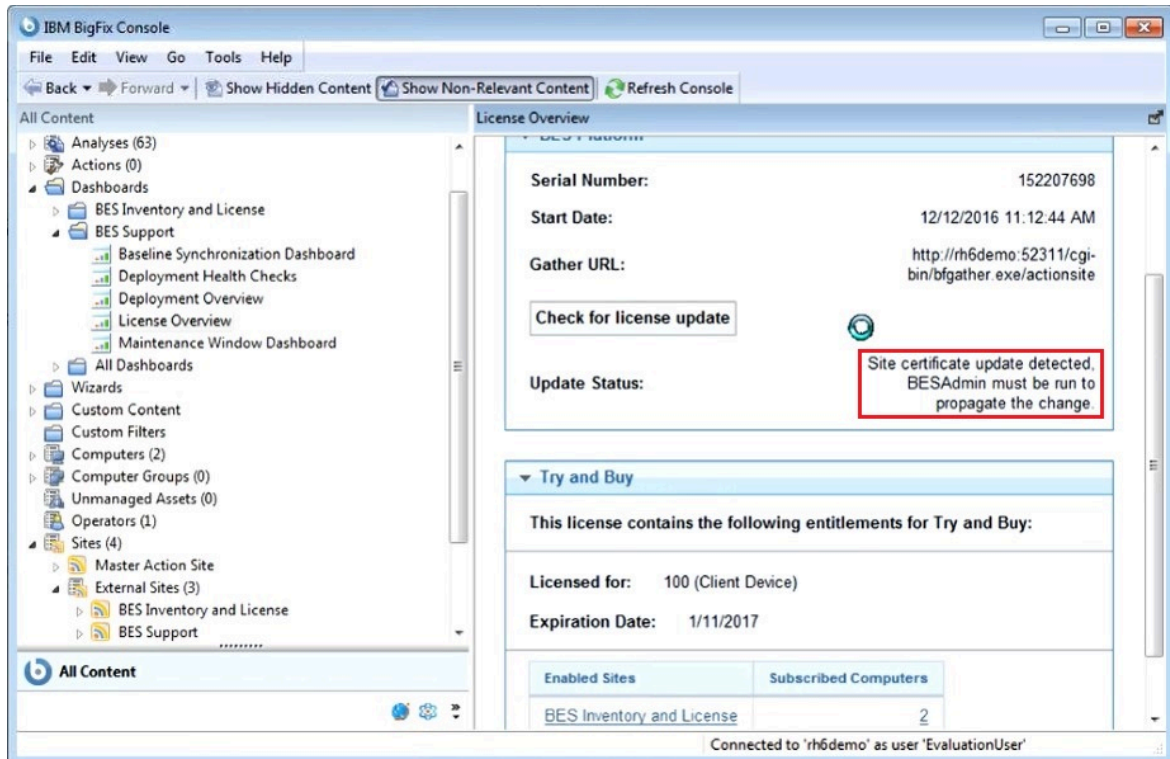

You can also wait for the BigFix server periodically checks of license changes. When license updates are available, it processes and propagates them to the environment. When the masthead is propagated, you can enable all the sites that are included in the production license you have bought. All the sites that were included in the evaluation license but are not included in the production license you have acquired are disabled.

IBM BigFix Console

File Edit View Go Tools Help

Back Forward Show Hidden Content Show Non-Relevant Content Refresh Console

All Content

- Fixlets and Tasks (1,391)
- Baselines (0)
- Analyses (63)
- Actions (0)
- Dashboards
 - BES Inventory and License
 - BES Support
 - Baseline Synchronization Dashboard
 - Deployment Health Checks
 - Deployment Overview
 - License Overview
 - Maintenance Window Dashboard
 - All Dashboards
 - Wizards
 - Custom Content
 - Custom Filters
 - Computers (2)
 - Computer Groups (0)
 - Unmanaged Assets (0)
 - Operators (1)
 - Sites (4)
 - LDAP Directories (0)
 - Roles (0)

License Overview

Check for license update

Lifecycle Management

This license contains the following entitlements for Lifecycle Management:

Licensed for: 5 (Client Device)

Expiration Date: 1/1/2037

Enabled Sites	Subscribed Computers
BES Inventory and License	2
Patching Support	2

Available Sites:

- [Enable] Advanced Patching
- [Enable] BES Asset Discovery
- [Enable] BigFix Remote Desktop for Windows
- [Enable] Client Manager for Application Virtualization
- [Enable] Client Manager for TCM
- [Enable] Client Manager for TPM/OSD

Chapter 6. Managing licenses

You must obtain a license key before you can install and use BigFix.

Your license is composed of two files:

- Your public key file: `license.crt`
- Your private key file: `license.pvk` protected by a password

The following table lists the tasks that are required to purchase, generate, and manage your license keys.

Task	Description
Check the product license requirements	It is important to understand the license requirements of the system you want to protect. A license lets you install the BigFix client on a specified number of computers.
Purchase a license	You must purchase a license in the following situations: • You want to purchase BigFix. • Your trialware license expired. • Your paid license expired. • Your license is over-deployed and an updated <code>license.crt</code> is required for the increased license count purchase. • Your upgrade license expired.

Within a few hours of your purchase you receive two emails. One email is sent from HCL as confirmation of your purchase. Another email contains instructions about how to access the [BigFix License Key Center](#). These emails are sent to the technical contact associated with the HCL Customer Number for the account.

Get the li- To get your product license you must have an authorization file from the
 cense au- [BigFix License Key Center](#) site. See [Creating the License Authorization File](#)
 thoriza- [\(on page 82\)](#).
 tion file

Gener- During the installation of the Server, after you specify the license autho-
 ate your rization file, you generate the `license.pvk` file, which is your private key
 license file. You also request and get the `license.crt` file, which is your public key
 files dur- file. These two files together complete your license.

ing instal- See [Requesting the license files \(on page 101\)](#) on Windows and [Step 2 -](#)
 lation: [Installing the Server \(on page 173\)](#).

- Cre-
ate
the
pri-
vate
key
file
- Re-
quest
and
get
the
li-
cense
cer-
tifi-
cate
- Gen-
er-
ate
the

mast-
head
file

Back up your license files Store your `license.crt` (public key) file with your existing `license.pvk` (private key) file. Keep these two keys together and create a backup copy in a secure location. Create also a backup copy of the site admin password that you used to encrypt the private key file, and store it in a secure location. Only in this way are you in complete control of your license keys. Backing up your license files preserves the license files in case the database or the computer hard disk is damaged.

In particular the `license.pvk` file is the part of your key files that needs to stay private. The `license.crt` file is your public key file and must be combined with your private key file to complete your license. You can open the license files in a text editor to review their contents.

Check license status and distribute the new license and masthead files You can see the notifications about expired license and other license issues for the license that you imported into the console.
See [Distributing the Updated License and Masthead \(on page 84\)](#).

This is a summary of the steps to perform to get your license key files:

1. Purchase a license.
2. Get an authorization file from the [BigFix License Key Center](#) site.
3. Start the BigFix installation and enter the authorization file when requested to get the `license.crt` file. At the end of the process both the public key and private key license files are generated together with the masthead file. This file contains configuration,

license, and security information, including URLs that point to where trusted Fixlet content is available. It is used for installing DSA servers and is distributed to all the clients using that server.

Creating the License Authorization File

To create your license authorization file (`.BESLicenseAuthorization`), containing deployment and licensing information and used during the installation to create your license files, access the HCL License and Download portal.

This site is an online license key delivery and management service that allows you to obtain and manage the license keys you need to use the product.

To create the authorization file perform the following steps:

1. Access [HCL License and Download portal](#)
2. Enter your email address and the password you received together with the instructions about how to access the HCL License and Download portal.
3. For each product in the list specify the allocated client quantity. If you leave 0, you cannot install the related product.

Licensing Assistance

For specific problems with your license such as license expiration date, entitlement counts, or lost authorization files, open a Licensing case in the HCL Customer Support Portal at <https://support.hcltechsw.com/csm>.


Extending the license entitlements

How to purchase extra license entitlements

To use BigFix Fixlet sites, you must first purchase extra entitlements. The entitlements can be added to your current license. After your license is updated, you can enable the Fixlet sites in the BigFix Platform.

Procedure

1. Contact the Sales team to purchase entitlements for the BigFix Fixlet sites.
2. Check the serial number of your current BigFix license:
 - a. Log in to the BigFix console.
 - b. In the bottom-left corner, click **BigFix Management**.
 - c. In the navigation tree, click **License Overview**.
 - d. Your serial number is displayed in the BigFix Platform window.

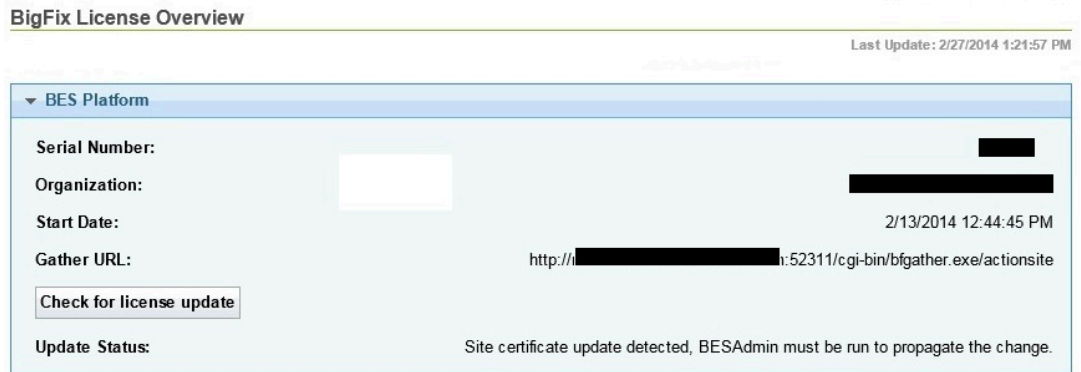

3. In the BES Platform window that you copied the serial number from, click **Check for license update**. If there is a change to your license, the following message is displayed: Site certificate update detected, BESAdmin must be run to propagate the change.
4. Go to the BigFix server and run the Administration Tool to update the license:

On Linux operating systems

- a. Go to `/opt/BESServer/bin`.
- b. Run the following command:

```
./BESAdmin.sh -syncmastheadandlicense -sitePvkLocation
=path_to_license.pvk
```

On Windows operating systems

- a. Go to `C:\Program Files (x86)\BigFix Enterprise\BES Server`.
- b. Run `BESAdmin.exe`.

- c. When prompted, provide the path to the site signing key (`license.pvk`), and enter the password.
- d. In the Masthead Management tab, click **OK**.

Results

You updated your license and propagated the change to your endpoints. It might take several minutes until the BigFix console displays the updated status. If the status does not change, restart the console.


Distributing the Updated License and Masthead

When you upgrade BigFix to V9.5, all existing license certificates are updated to contain both SHA-1 and SHA-256 signatures.

If you are connected to Internet, the message of a new license ready to be distributed to the clients together with the masthead is displayed in the **License Overview** dashboard after an automatic periodic gather or a manual check.

To force your server to check immediately run the following steps:

1. Open the BigFix console.
2. go to the **BigFix Management** domain.
3. click the **License Overview** node
4. Click **Check for license update**. You might receive a notification that BigFix deployment has gathered an update to your license (a new `license.crt` file):

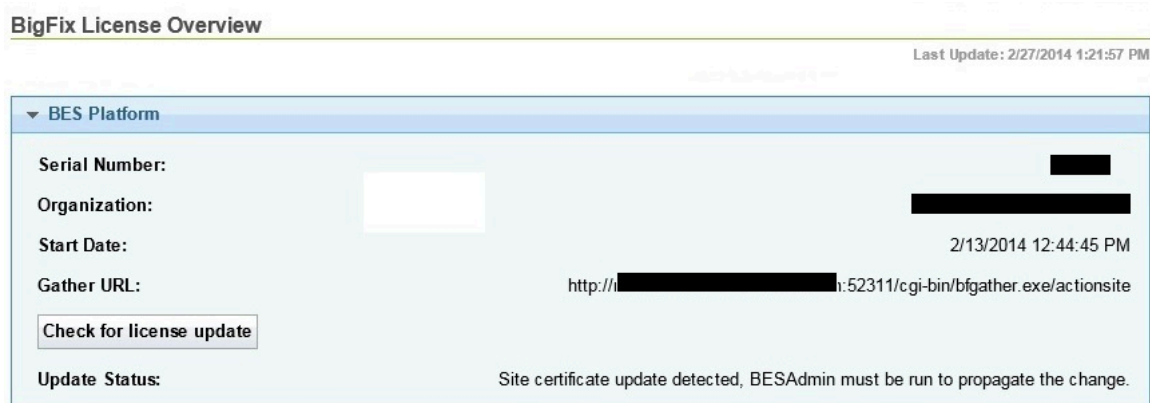



Note: This message might appear either because HCL needs to update the license or because you requested an update of your license. If you requested an update of your license, you receive a new `license.crt` file, that you must save on your server computer.

To distribute the updated license, resign the masthead and the objects in the database with both SHA-1 and SHA-256 signatures, run the Administration Tool (`./BESAdmin.sh` on Linux as super user).


If you are in an air-gapped environment the update of the license is not processed automatically. You can retrieve the license from the HCL site by using the AirgapTool utility. After importing it, you are notified from the License dashboard that a license update is ready to be distributed. You must run the Administration tool (`./BESAdmin.sh` on Linux) to distribute the updated license, and to resign the masthead and the database objects.


For more information about how to distribute the masthead on the clients see [Distributing the masthead from the Windows server to clients \(on page 85\)](#) and [Distributing the masthead from the Linux server to the clients \(on page 88\)](#).

Distributing the masthead from the Windows server to clients


From a BigFix Windows server, you can distribute a new masthead file with an updated license certificate, that extends your license, seat count, or entitlements to the clients, as follows:

1. Open the Administration Tool by selecting **Start > BigFix > BigFix Administration Tool**. After you log in, the installation Admin account distributes the masthead to the clients.

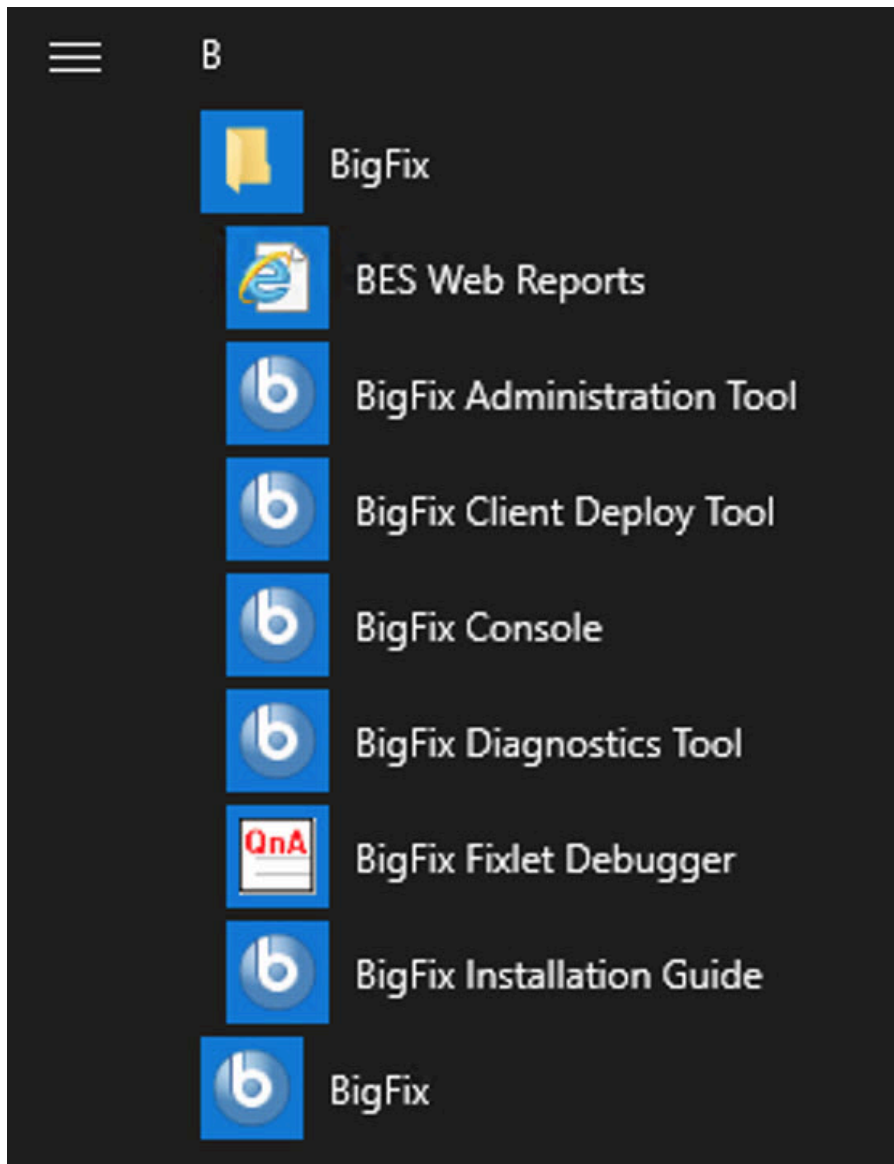


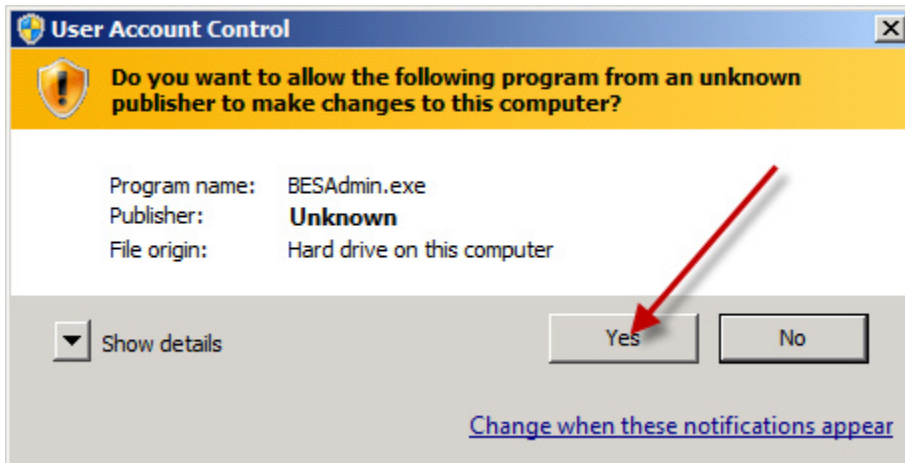


2. Choose your license.pvk file.

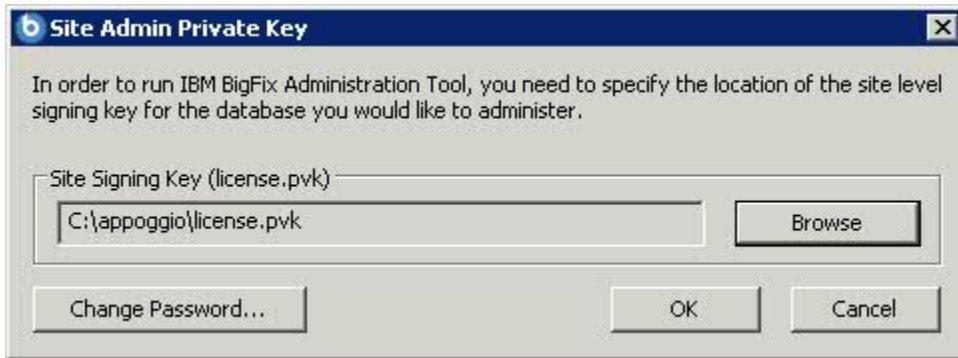

3. Enter your master (site level) password

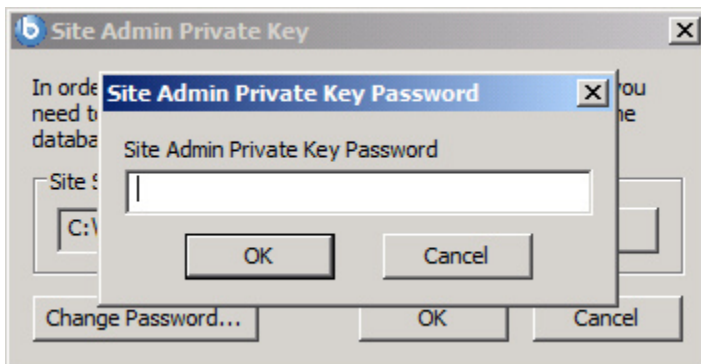

4. In **Masthead Management**, click **OK**.

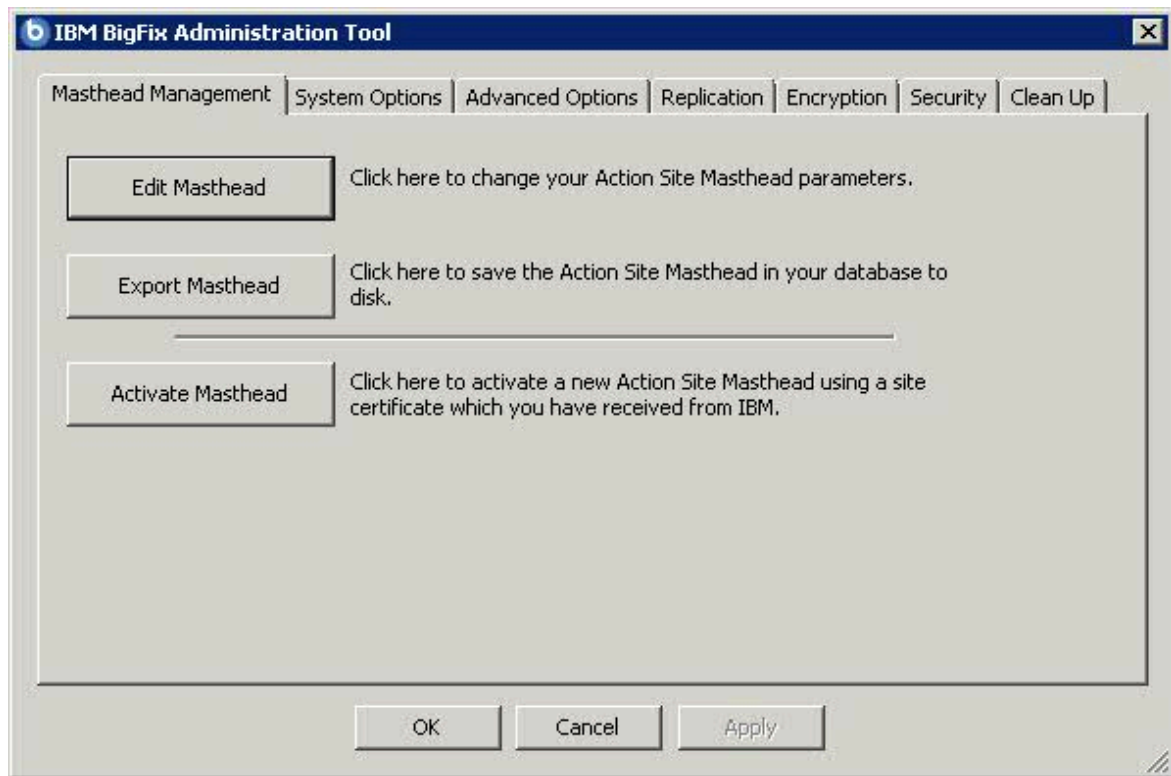

As soon as the clients receive the new masthead, they receive the updated license information.

Distributing the masthead from the Linux server to the clients

From a BigFix Linux server, you can distribute the updated license, resign the masthead and the database objects to the clients, by running the following command as super user:

```
./BESAdmin.sh -syncmastheadandlicense -sitePvkLocation=<path+license.pvk>  
-sitePvkPassword=<password>
```

Chapter 7. Before installing

Before running the installation make sure that you read the following topics and run the requested activities if needed.

Configuring a Local Firewall

If you have defined an active firewall on the computer where you are installing the BigFix server, you can decide to configure this firewall during the BigFix server installation in one of the following ways:

- During an interactive installation, the installation programs detects if a local firewall is active and you can specify if you want to configure it for the BigFix server.
- During a silent installation, you can set `CONF_FIREWALL=YES` in the response file to require the firewall configuration. For more information, see [Silent installation \(on page 196\)](#).

When you specify to configure the firewall, open the following two ports:

- Port `52311` for UDP and TCP/IP
- Port `8083` for Web Reports and TCP/IP

Modifying port numbers

By default, the server uses port **52311** to communicate with the clients, but you can choose any port number (although you should avoid the reserved ports between 1 to 1024 because of potential conflicts and difficulty managing network traffic).

Your choice of the server port number is factored into the generation of the masthead, which specifies URLs for the action, registration, reporting, and mirror servers. As a consequence, you must finalize your port number **before installation**.

Consoles use port **52311** to connect to the server.

Understanding the server components

The BigFix server responds to messages and requests from the relay, client, and console computers using a variety of components.

To better understand what the server does, read the descriptions of some of the components.

Client Registration Component

When the client is installed on a new computer, it registers itself with the client registration component of the server and the client is given a unique ID. If the computer IP address changes, the client automatically registers the new IP address with the client registration component.

Post Results Server Component

When a client detects that a Fixlet has become relevant, it reports to the Post Results server component using an HTTP POST operation. It identifies the relevant Fixlet together with the registered ID of the client computer. This information is passed on to the BigFix database through the FillDB service and then becomes viewable in the console. Other state changes are also periodically reported by the clients to the server directly or through relays.

Gather Server Component

This component watches for changes in Fixlet content for all the Fixlet sites to which you are subscribed. It downloads these changes to the server and makes them available to the GatherDB component.

FillDB Component

This component posts client results into the database.

GatherDB Component

This component gathers and stores Fixlet downloads from the Internet into the database.

Download Mirror Server Component

The Download Mirror Server component hosts Fixlet site data for the relays and clients. This component functions as a simplified download server for BigFix traffic.

Chapter 8. Installing on Windows systems

Now that you understand the terms and the administrative roles, you are ready to get authorized and install the programs.

Because BigFix is powerful, you might want to limit access to trusted, authorized personnel only. The product depends on a central repository of Fixlet actions called the **Action site**, which uses public/private key encryption to protect against spoofing and other unauthorized usage. To get started, you need authorization from HCL by getting a **License Authorization** file, which will have a name like `CompanyName.BESLicenseAuthorization`.



Note: If you run a fresh installation of BigFix V9.5.6 or later using the **License Authorization** file, be aware that limitations apply in managing Clients earlier than V9.0 and in using Relays earlier than V9.5.6. This is due to the introduction of two security enforcement services that are enabled, in this specific scenario, by default. You can change this behavior after the installation completes by changing the values assigned to `minimumSupportedClient` and `minumumSupportedRelay` as described in [BESAdmin Windows Command Line \(on page 299\)](#).

The Installer program collects further information about your deployment and then creates a file called the **action site masthead**. This file establishes a chain of authority from the BigFix root all the way down to the Console operators in your organization. The masthead combines configuration information (IP addresses, ports, and so on) and license information (how many Clients are authorized and for how long) together with a public key that is used to verify the digital signatures. To create and maintain the digital signature keys and masthead, you use the **BigFix Installer**, which you can download from HCL.

Step 1 - Downloading BigFix

Download BigFix from the HCL License & Delivery Portal (Flexnet).

You can download BigFix also from the support site at <http://support.bigfix.com/bes/install/downloadbes.html>.

To install the server component, download the following e-images from [HCL License & Delivery Portal](#):

Table 1. Software required for installing BigFix Server

Software Name	Image
HCL BigFix Platform Install V9.5 for Multiplatforms	BigFix_Pltfmr_Install_V95.zip

To extract the BigFix Windows server installation files, perform the following steps:

1. Copy the BigFix Server zip file `BigFix_Pltfmr_Install_V95.zip` to your Windows Server.
2. Expand the zip file using the following command:

```
unzip "BigFix_Pltfmr_Install_V95.zip"
```


You can find the `setup.exe` file to install the Windows Server in the `BigFix_Pltfmr_Install_V95` folder.

Performing an evaluation installation


When performing a fresh installation of BigFix Server Version 9.5 Patch 7 or later, you can either perform an evaluation installation or a production installation.

To install a BigFix server with an evaluation license, perform the following steps:


1. On the computer where you want to install the BigFix server, run the BigFix Installation Generator.

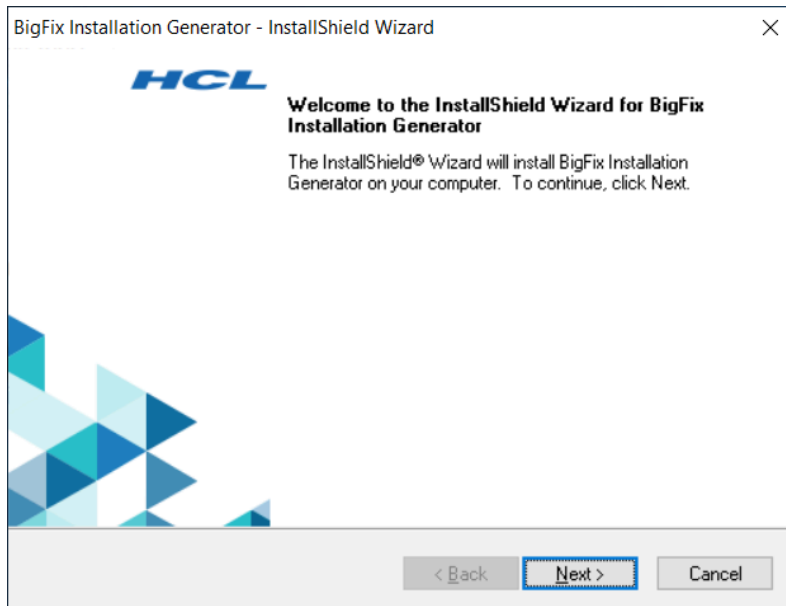


2. Select **Evaluation**.

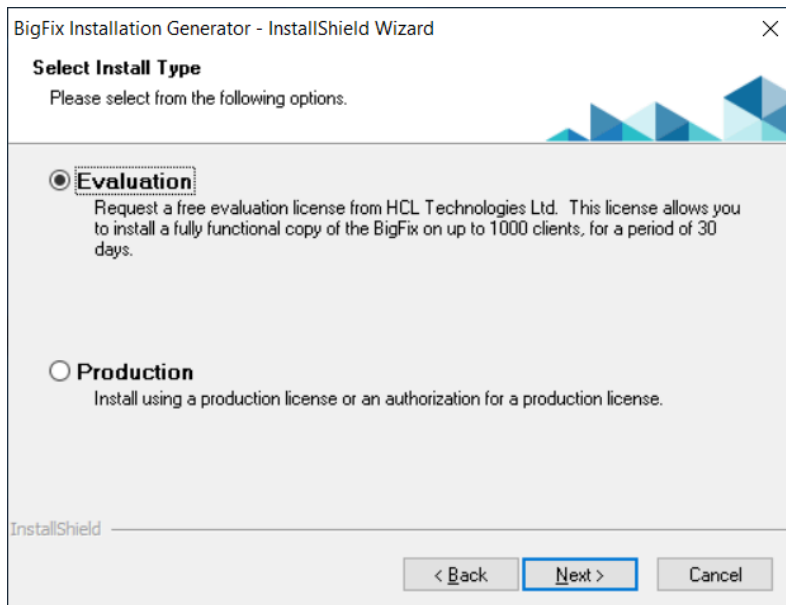


3. Accept the terms in the license agreement.

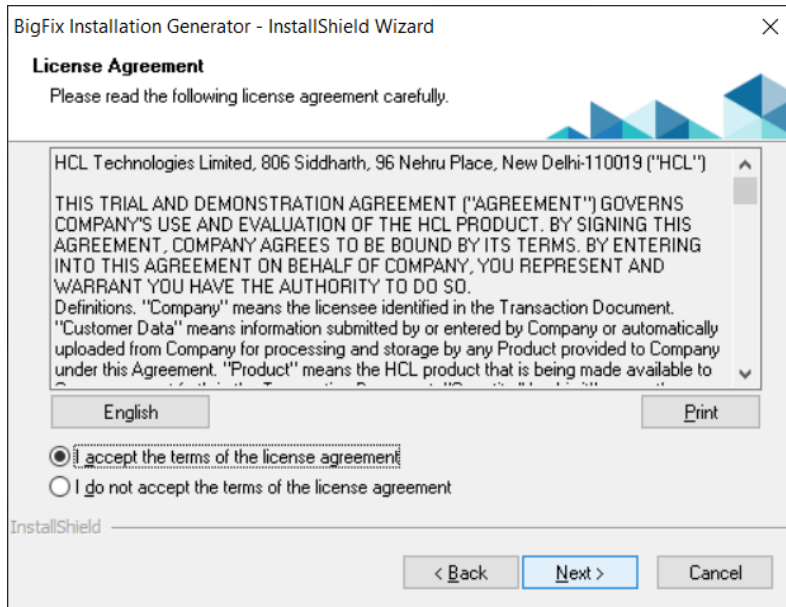

4. Select **Express** if you want to install BigFix to the default location.

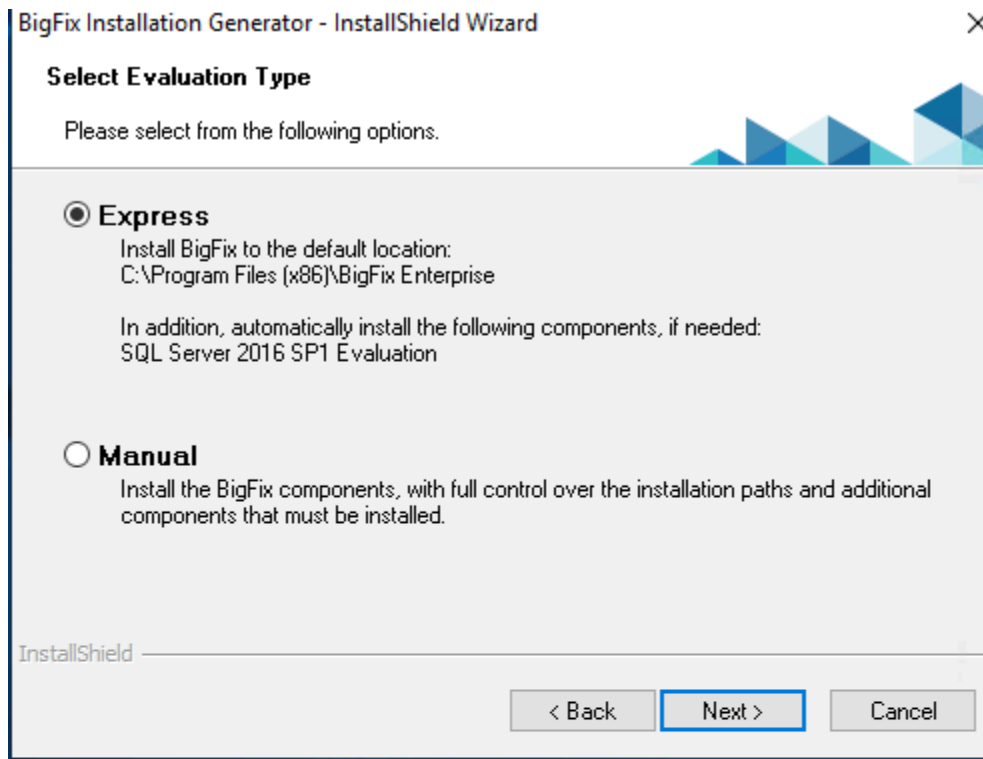

5. After choosing the **Express** option, specify the password for the current user.

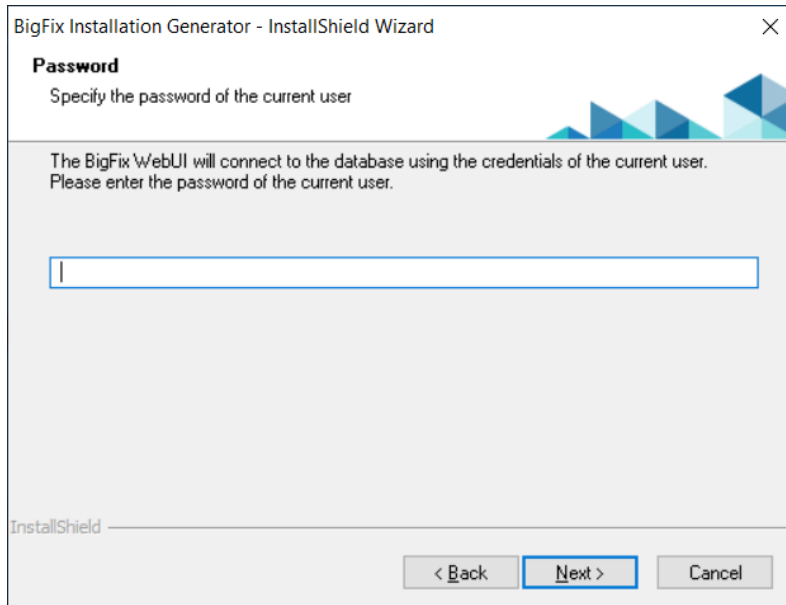

BigFix Installation Generator - InstallShield Wizard


Password
Specify the password of the current user

The BigFix WebUI will connect to the database using the credentials of the current user.
Please enter the password of the current user.

InstallShield

< Back Next > Cancel

6. Request an evaluation license certificate file. To obtain it, you must enter the following data like in the example below:

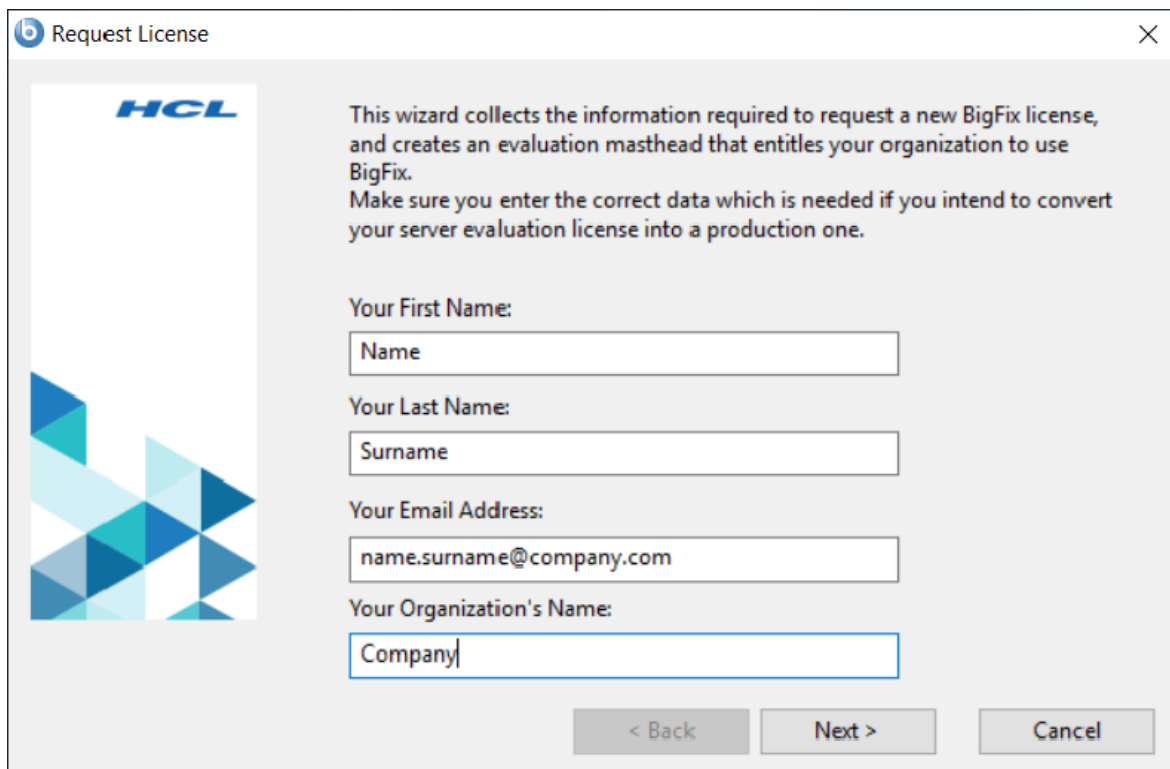

b Request License

HCL

This wizard collects the information required to request a new BigFix license, and creates an evaluation masthead that entitles your organization to use BigFix.
Make sure you enter the correct data which is needed if you intend to convert your server evaluation license into a production one.

Your First Name:


Your Last Name:

Your Email Address:

Your Organization's Name:


< Back Next > Cancel

7. Provide the domain name of the server and port on which you are going to install (isolated server), or leave the local domain name if you are installing BigFix on the local server.

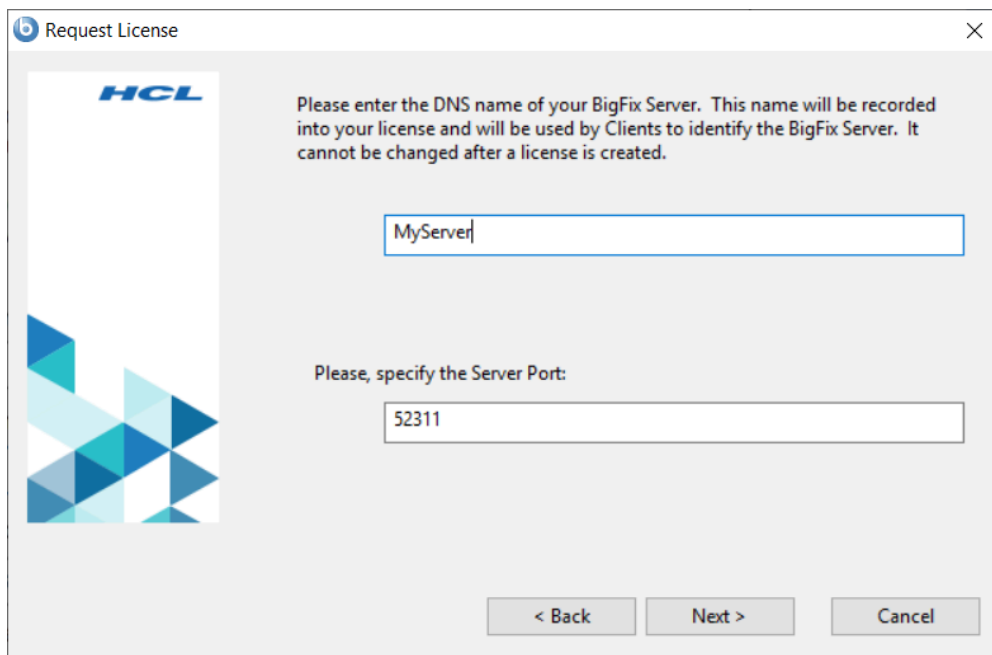


The dialog box is titled "Request License" and features the HCL logo on the left. The main text reads: "Please enter the DNS name of your BigFix Server. This name will be recorded into your license and will be used by Clients to identify the BigFix Server. It cannot be changed after a license is created." Below this is a text input field containing "MyServer". The next section says: "Please, specify the Server Port:" followed by a text input field containing "52311". At the bottom are three buttons: "< Back", "Next >", and "Cancel".

8. Create a public/private key pair and specify a password that will be used to encrypt the private key file.

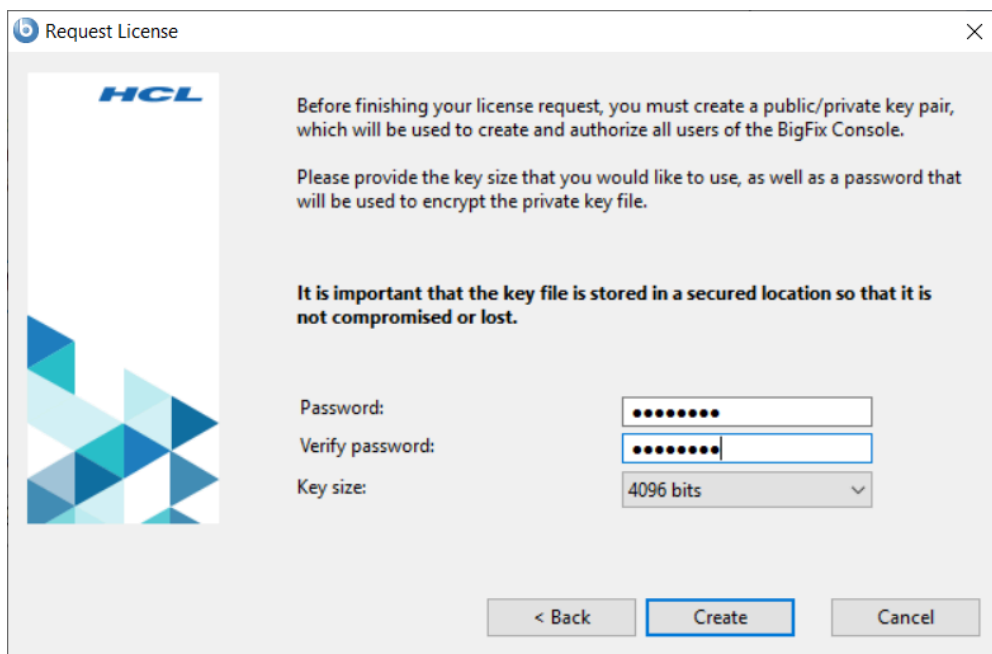


The dialog box is titled "Request License" and features the HCL logo on the left. The main text reads: "Before finishing your license request, you must create a public/private key pair, which will be used to create and authorize all users of the BigFix Console. Please provide the key size that you would like to use, as well as a password that will be used to encrypt the private key file." Below this is a bold warning: "It is important that the key file is stored in a secured location so that it is not compromised or lost." The form has three fields: "Password:" with a masked input field, "Verify password:" with a masked input field, and "Key size:" with a dropdown menu showing "4096 bits". At the bottom are three buttons: "< Back", "Create", and "Cancel".

9. Specify the folder where your private key and license certificate will be created.

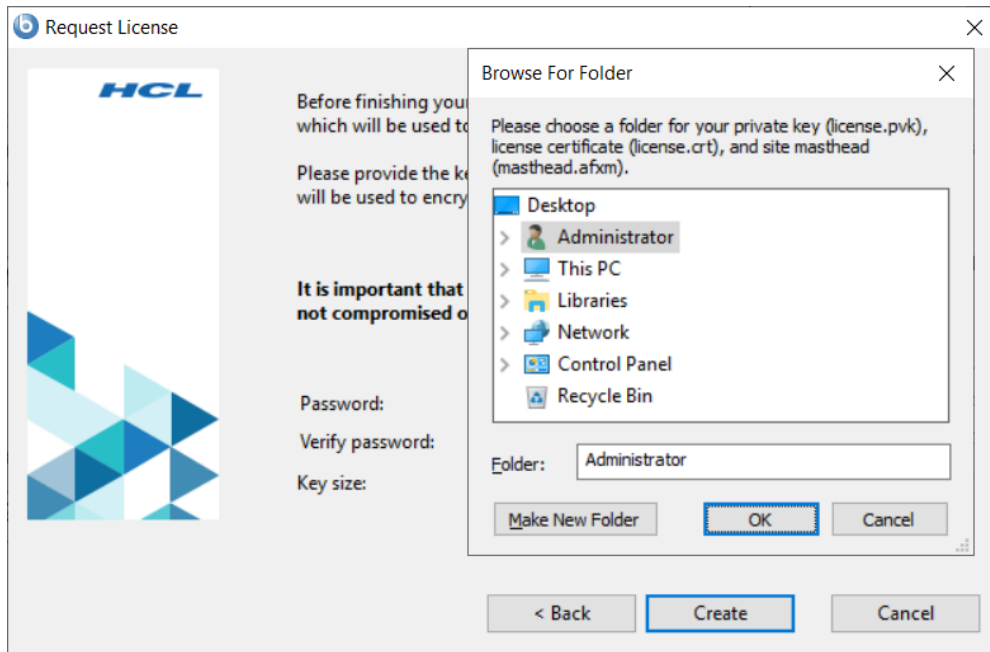


10. (Optional) Click **Set Proxy** if you use a proxy to connect to Internet.

11. Click **Request** to proceed with the request.

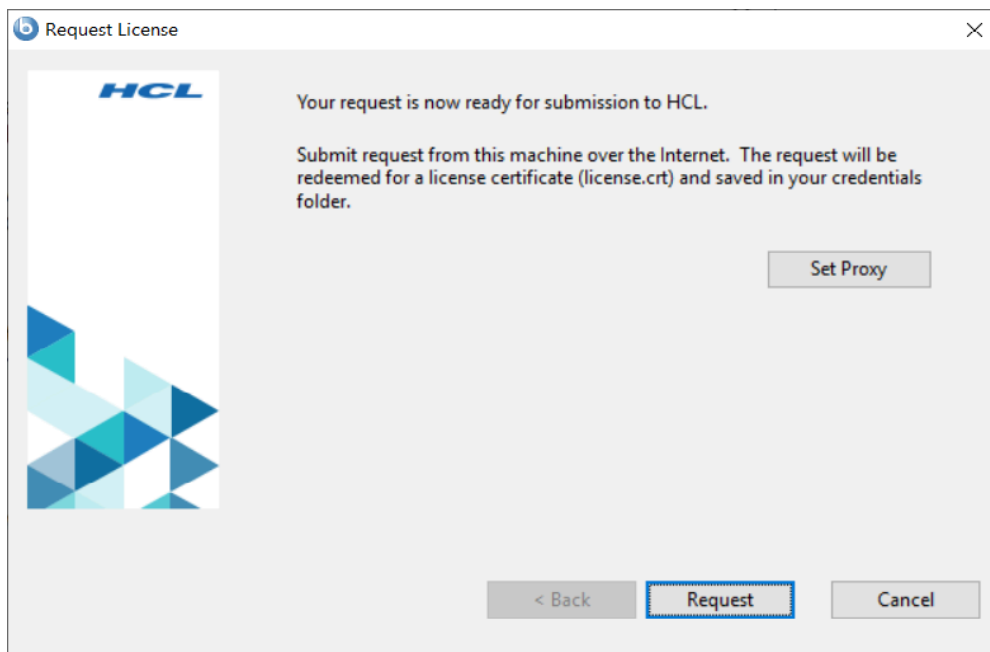


12. Click **Continue** to proceed with the evaluation installation on this local server.

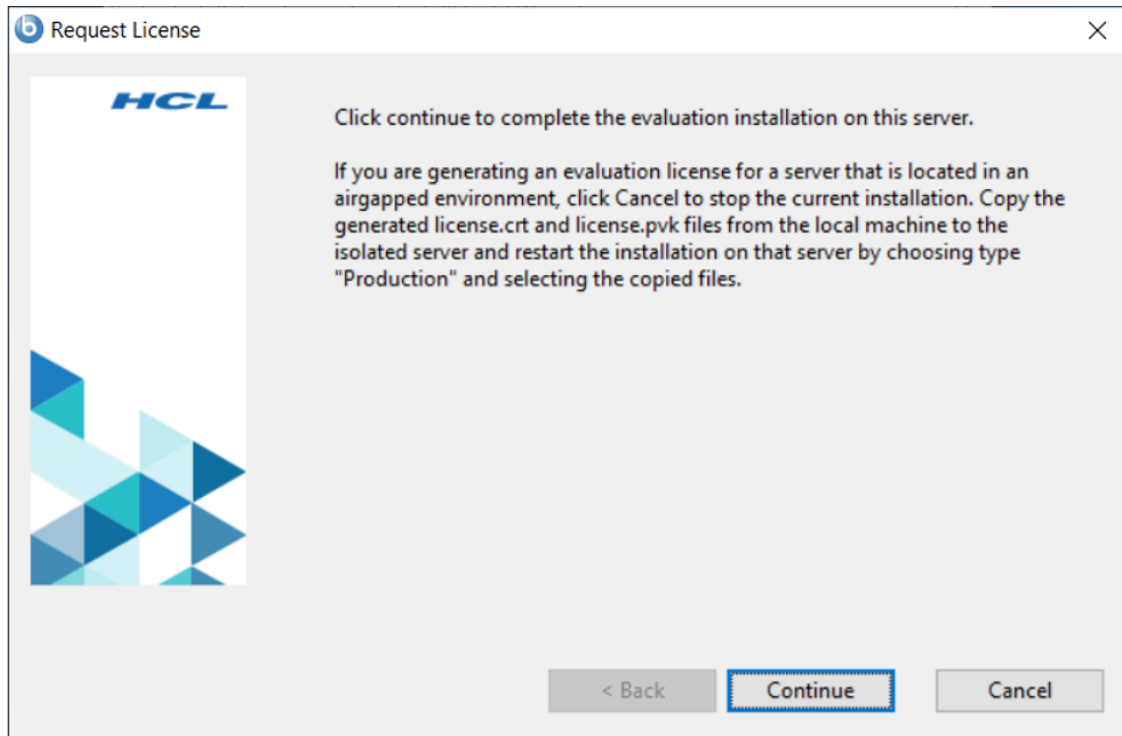

Note: If you want to perform the evaluation installation on an isolated server (server located in an airgapped environment), in this panel click **Cancel** and perform the following actions:

- a. Copy the license files, generated for the isolated server, from the current local machine to the isolated server.
- b. On the isolated server, launch again the BigFix Installation Generator.
- c. Perform the server installation by selecting:
 - **Production** as installation type
 - **I want to install with a production license I already have** as installation option.
- d. Provide the location of the license files generated for the isolated server.

13. Click **Finish** to close the BigFix Installation Generator - InstallShield Wizard.

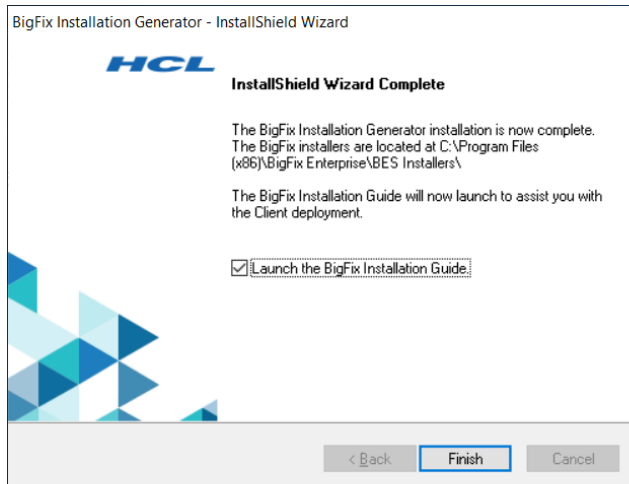

Step 2 - Requesting a license certificate and creating the masthead

Before you perform the steps below, you must have purchased a license and obtained a BigFix license authorization file (*.BESLicenseAuthorization) using your License Key Center account or, in the case of a Proof-of-Concept evaluation, that was provided to you by your HCL Technical Sales Representative.


When you have your license authorization file, you are ready to request a license certificate and then create a personalized **site masthead** that, in turn, allows you to install and use BigFix. The masthead includes URLs for the Server CGI programs and other site information in a signed MIME file. The masthead is central to accessing and authenticating your action site. To create the masthead and activate your site, follow these steps:

1. Run the BigFix installer `BigFix-BES-9.5.xxxx.exe`, where `9.5.xxxx` is the version of the installer). When prompted, choose **Production** installation and accept the Software License Agreement. On the welcome screen, click **Next**.




Note: If you choose the **Evaluation** installation, consider that this type of installation does not support the enhanced security option. For more information about this feature, see Security Configuration Scenarios.

2. After reading and accepting the License Agreement, select **I want to install with an BigFix license authorization file**, to create your Private Key and Masthead.

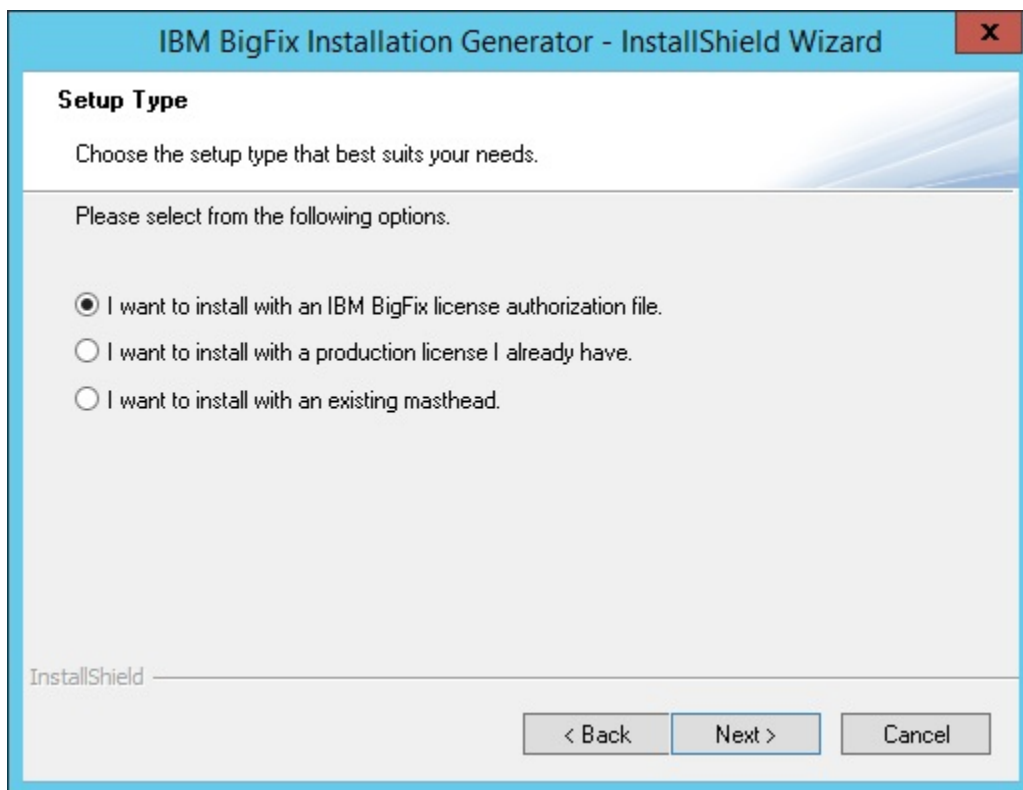

3. Enter the location of your license authorization file, which has a name like `CompanyName.BESLicenseAuthorization`

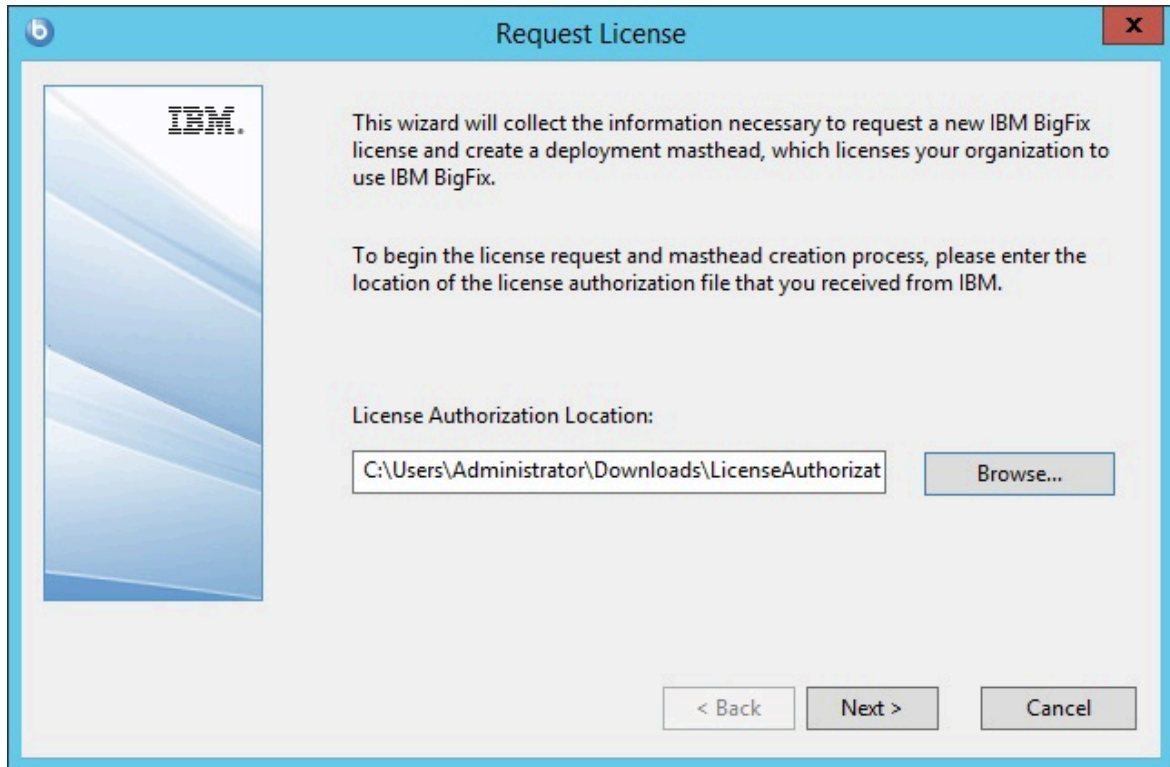


4. Specify a **DNS name** or **IP address** for your BigFix server and click **Next**. The name that you enter in this field is recorded in the license and used by clients to identify the BigFix server.



Note: Enter a DNS name, such as `bes.companyname.com`, because of its flexibility when changing server computers and doing advanced network configurations. This name is recorded into your license certificate and is used by clients to identify the BigFix server. After your license certificate is created, the DNS name cannot be changed. To change the DNS name, you must request a new license certificate, which requires a completely new installation.

5. Type a site credential **password** to allow you to create a site admin key for your deployment. Type your password twice (for verification), and specify a key size (from 2K to 4K bits) for encrypting the private key file. Make a backup copy of this password and store it in a secure location. Click **Create**.

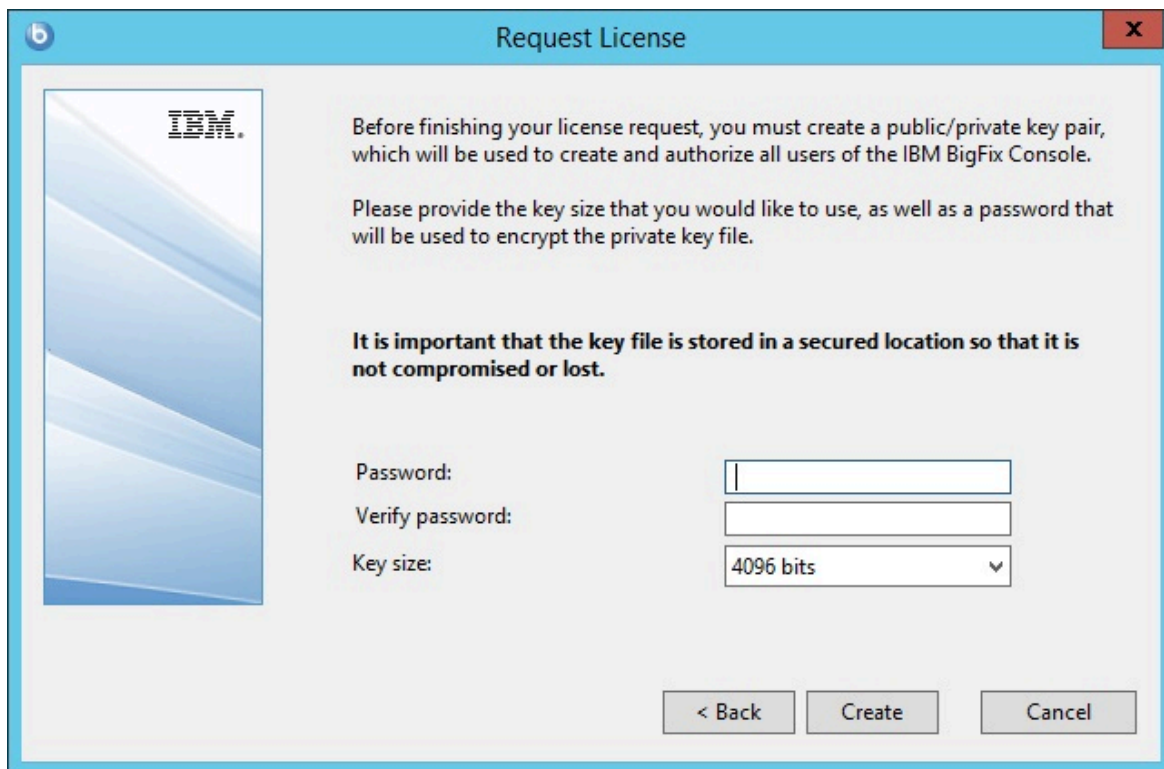

The image shows a Windows-style dialog box titled "Request License". On the left is a vertical panel with the IBM logo at the top and a blue abstract graphic below. The main area contains the following text:

Before finishing your license request, you must create a public/private key pair, which will be used to create and authorize all users of the IBM BigFix Console.

Please provide the key size that you would like to use, as well as a password that will be used to encrypt the private key file.

It is important that the key file is stored in a secured location so that it is not compromised or lost.

Below the text are three input fields:

- Password: [text box]
- Verify password: [text box]
- Key size: [dropdown menu showing "4096 bits"]

At the bottom right are three buttons: "< Back", "Create", and "Cancel".


In this way you generate a private/public key pair used to create and authorize all the BigFix users.

6. Save your private key (`license.pvk`) file from the **Browse for Folder** dialog in a folder with secure permissions or on a removable drive, such as a PGPDisk or a USB drive. Click **OK**.




Important: If you lose the private key file or the site credential password, a new license certificate needs to be created which requires a completely new installation. In addition, anyone with the private key file and password have full control over all computers with the BigFix clients installed, so ensure that you keep the private key file and password secured.

7. You are requested to send the request file to HCL for license verification. If you have internet connectivity, choose the option to submit your request over the internet. In this case, a request file is sent to HCL for license verification. This request consists of your original authorization file, your server DNS name and your public key, all packaged into a single file.

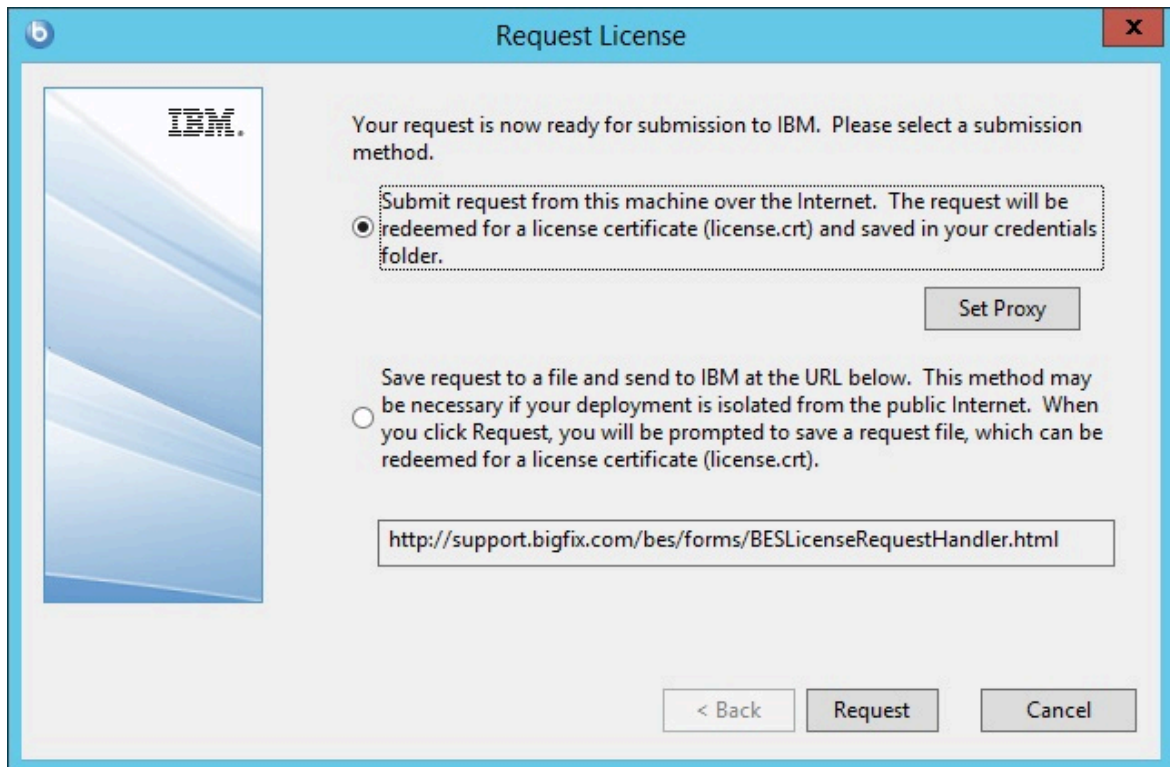

8. If you select to submit the request over the Internet and your enterprise uses a proxy to access the Internet, click **Set Proxy**. The **Proxy Settings** panel opens. In this panel you can configure the proxy connection.

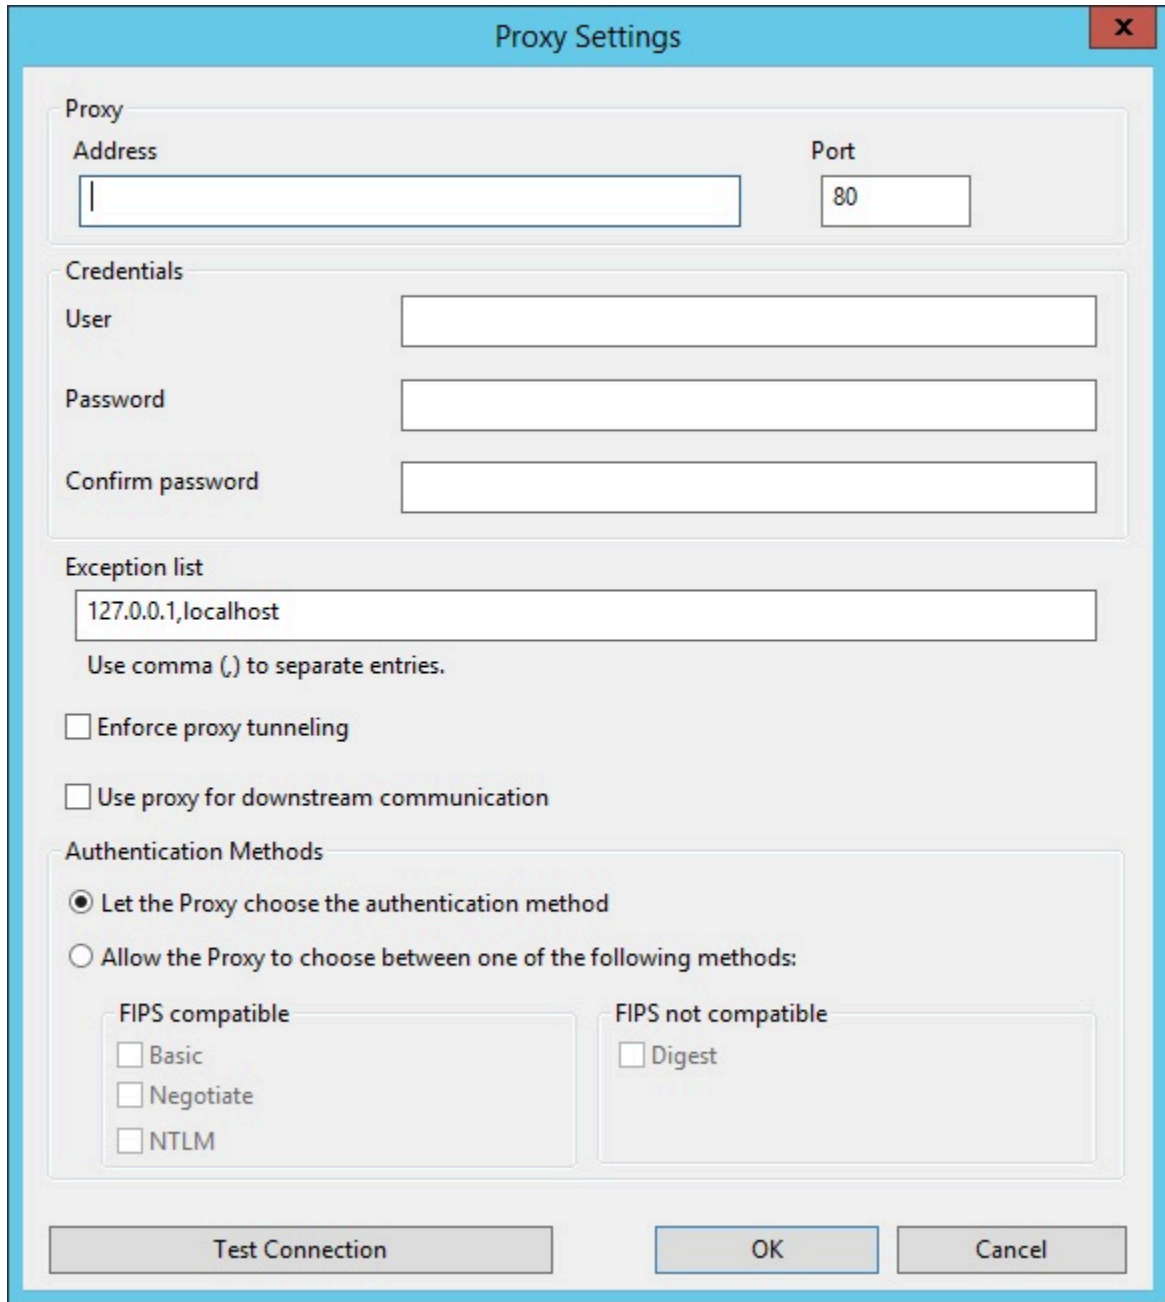The image shows a 'Proxy Settings' dialog box with a blue title bar and a red close button. It contains several sections: 'Proxy' with 'Address' and 'Port' fields; 'Credentials' with 'User', 'Password', and 'Confirm password' fields; 'Exception list' with a text field containing '127.0.0.1,localhost' and a note 'Use comma (,) to separate entries.'; and 'Authentication Methods' with radio buttons for 'Let the Proxy choose the authentication method' (selected) and 'Allow the Proxy to choose between one of the following methods:'. The latter has two sub-sections: 'FIPS compatible' with 'Basic', 'Negotiate', and 'NTLM' checkboxes, and 'FIPS not compatible' with a 'Digest' checkbox. At the bottom are 'Test Connection', 'OK', and 'Cancel' buttons.

Proxy Settings

Proxy

Address

Port

Credentials

User

Password

Confirm password

Exception list

Use comma (,) to separate entries.

☐ Enforce proxy tunneling

☐ Use proxy for downstream communication

Authentication Methods

☒ Let the Proxy choose the authentication method

☐ Allow the Proxy to choose between one of the following methods:

FIPS compatible

☐ Basic

☐ Negotiate

☐ NTLM

FIPS not compatible

☐ Digest

Test Connection OK Cancel

9. Specify:

- The hostname or IP Address and, optionally, the port number to communicate with the proxy machine.
- The credentials of the user defined on the proxy machine that must be used when establishing the connection.

- The comma-separated list of hostnames, subdomains, IP addresses that identify systems in the BigFix topology that must not be reached thru the proxy. By default, BigFix V9.5 prevents diverting internal communications towards the proxy. If you set a value in this field, you overwrite the default behavior. To ensure that internal communications are not directed to the proxy, add `localhost, 127.0.0.1, yourdomain.com, IP_Address` to the list of exceptions specified in this field.
- Whether or not the proxy is enforced to attempt tunneling. By default the proxy does not attempt tunneling.
- The authentication method to use when establishing the communication. You can either let the proxy choose the authentication method or you can impose to use specific authentication methods.



Note: If you want to enable FIPS mode, select an authentication method other than digest.

You can click **Test Connection** to verify if the connection with the proxy that you configured can be successfully established. For more information about the values and the syntax to use in these input fields, see [Setting a proxy connection on the server \(on page 427\)](#).

Click **OK** save the settings and return to the **Request License** panel.

10. Click **Request**. The Wizard retrieves your license certificate (`license.crt`) from the BigFix License server.

Alternatively, if you are on an airgap without internet connectivity, choose the option to save the request as a file named `request.BESLicenseRequest`. Copy the file to a machine with internet connectivity and submit your request to the URL of the BigFix website shown in the installer. The page provides you with a `license.crt` file. Copy the file back to the installation computer and import it into the installer.

11. From the **Request License** dialog, click **Create** to create the masthead file.
12. Enter the parameters of the masthead file that contains configuration and license information together with a public key that is used to verify digital signatures. This file is saved in your credential folder.

Advanced Masthead Parameters

The default values for these parameters should be suitable for most IBM BigFix deployments. For further information about the implications of these parameters, please contact a IBM BigFix support technician.

Server Port Number:

Gathering Interval:

Initial Action Lock: minutes

Action Lock Controller:

☐ Exempt the following site URL from action locking:

☐ Last fallback Relay for all clients (replacing Root Server)

☐ Require use of FIPS 140-2 compliant cryptography.

☒ Allow use of Unicode filenames in archives.

You can set the following options:

Server Port Number:

In general, you do not need to change this number. 52311 is the recommended port number, but you can choose a different port if that is more convenient for your particular network. Typically, you choose a port from the IANA range of private ports (49152 through 65535). You can use a reserved port number (ports 1-1024), but this might reduce the ability to monitor or restrict traffic correctly and it prevents you from using port numbers for specific applications. If you do decide to change this number *after* deploying the clients, BigFix will not work correctly. For additional information, see *Modifying port numbers*.



Note: Do not use port number 52314 for the network communication between the BigFix components because it is reserved for proxy agents.

Gathering Interval:

This option determines how long the clients wait without hearing from the server before they check whether new content is available. In general, whenever the server gathers new content, it attempts to notify the clients that the new content is available through a UDP connection, circumventing this delay. However, in situations where UDP is blocked by firewalls or where network address translation (NAT) remaps the IP address of the client from the servers perspective, a smaller interval becomes necessary to get a timely response from the clients. Higher gathering rates only slightly affect the performance of the server, because only the differences are gathered; a client does not gather information that it already has.

Initial Action Lock:

You can specify the initial lock state of all clients, if you want to lock a client automatically after installation. Locked clients report which Fixlet messages are relevant for them, but do not apply any actions. The default is to leave them unlocked and to lock specific clients later on. However, you might want to start with the clients locked and then unlock them on an individual basis to give you more control over newly-installed clients. Alternatively, you can set clients to be locked for a certain period of time (in minutes).

Action Lock Controller:

This parameter determines who can change the action lock state. The default is **Console**, which allows any console operator with management rights to change the lock state of any client in the network. If you want to

delegate control over locking to the end user, you can select **Client**, but this is not recommended.

Exempt the following site URL from action locking:

In rare cases, you might need to exempt a specific URL from any locking actions. Check this box and enter the exempt URL.



Note: You can specify only one site URL and it must begin with `http://`.

Last fallback Relay for all clients (replacing Root Server):

You might need to define a fallback relay for your clients when they do not connect to any relay specified in their settings. Select this check box and specify the fallback relay of your environment in one of the following formats:

- Hostname. For example, *myhostname*.
- Fully qualified domain name (FQDN). For example, *myhostname.mydomain.com*.
- IP address. For example, *10.10.10.10*.

If you do not select this check box and define a fallback relay, the root server of your environment is used.



Note: Before specifying a fallback relay, ensure that any client or relay reporting directly to the root server has the root server defined as a relay. This setting will not prevent endpoints from selecting the root server. Also set `_BESRelay_Register_Affiliation_AdvertisementList` on the BES Root Server to a group name that will not be set on any clients, such as `DoNotSelectMe`.

Require use of FIPS 140-2 compliant cryptography

Check this box to be compliant with the Federal Information Processing Standard in your network. This changes the masthead so that every BigFix component attempts to go into FIPS mode. By default, the client continues in non-FIPS mode if it fails to correctly enter FIPS, which might be a problem with certain legacy operating systems. Be aware that checking this box can add a few seconds to the client startup time. For more information see FIPS 140-2 cryptography in the BigFix environment in the Configuration Guide.



Note: Enabling FIPS mode might prevent the use of some authentication methods when connecting to a proxy. If you selected to use a proxy to access the Internet or to communicate with BigFix subcomponents, ensure that the proxy configuration is set up to use an authentication method other than digest.

Allow use of Unicode filenames in archives:

This setting specifies the codepage used to write filenames in the BigFix archives. Check this box to write filenames UTF-8 codepage. Do not check this box to write filenames using the local deployment codepage, for example Windows-1252 or Shift JIS. If you run a fresh install of BigFix V9.5, by default, the filenames are written in UTF-8.



Note: If you upgraded your BigFix environment to V9.5, by default, the filenames are written in the local deployment code page.

Click **OK** when you are finished.

13. Choose the folder in which to install the BigFix component installers. The BigFix Installation Guide wizard is launched to lead you through the installation of the BigFix components.



Note: This step creates the installers for the BigFix client, BigFix console, and BigFix server, but does not install the components.



Note: The private key (`license.pvk`) authorizes the creation and rotation of server signing keys, which are trusted by all agents. This key is *not* sent to HCL during the license certificate creation process, and must be carefully protected. Create also a backup copy of the credential password that you used to encrypt the private key file, and store it in a secure location. To reinstall the server on your workstation, you must reuse the stored BigFix credentials. If you lose the private key file or the site credential password, a new license certificate needs to be created which requires a completely new installation.

Installing the components

You have now created a private key, requested and received a certificate, used the certificate to create a masthead, and then generated the various installation components, including the **BigFix Installation Guide**.

When the components have been saved, the **BigFix Installation Guide** automatically launches. You can also run it at any time by selecting it from the Start Menu.

To install the three major components of BigFix (server, console, and client), follow these steps:

1. If it is not already running, launch the Installation Guide (**Start > Programs > BigFix > BigFix Installation Guide**).
2. A dialog box opens, prompting you to select a component to install. Click the links on the left, in order from top to bottom, to install the BigFix components. You can also Browse Install Folders. The component installers includes:

- Install Server
 - Install Console
 - Install Clients
 - Install WebUI
3. The BigFix server, console, clients and WebUI all have their own installers. Follow the instructions for each, as described in the following sections.

Managing the Server ID limit

The Server ID is the identifier of the BigFix server.

In a single instance server deployment, the Server ID is 00. If there are other servers in the deployment that are configured for DSA replication with the primary server, they will assume the following values: 01, 02, 03, etc..

With BigFix 9.5.10, the maximum number of Server IDs you can use is 32 (from 00 to 31). Consequently, the number of allowed DSA servers decreases from 256 to 32.

The following checks are run:

- In the server upgrade scenario, a pre-check is run to ensure that the DSA servers that are already configured are not more than 32, otherwise an error message to reduce the Server IDs is issued. To solve the problem, contact HCL Customer Support.
- When installing a new DSA server, an additional check ensures that the upper limit for the Server IDs does not exceed a given threshold, otherwise a warning is logged in `BESAdminDebugOut.txt`. The same check inhibits or prevents the new DSA server installation if the limit is reached.
- When you replicate the database using the Replication tab in the BigFix Admin tool, the BESAdmin command or the RESTAPI, if the Server ID is between 26 and 31, a warning is logged in the `BESAdminDebugOut.txt` and `BESRelay.log` respectively.

Installing the Windows primary server

The BigFix server is the heart of the system. It runs on a server-class computer on your network, which must have direct Internet access as well as direct access to all the client computers in your network.

Ensure that your server meets the requirements outlined in Detailed system requirements.



Important: Ensure that the user that logs in to install the BigFix server has `sysadmin` rights for the MSSQL Server to create the database and its tables.



Note: If you removed Microsoft SQL Server from your system where you plan to install BigFix, ensure that all the Microsoft SQL components are correctly deleted before running the installation.



Note: The version of Microsoft SQL Server installed with BigFix is SQL Server Evaluation, which is a fully-functional version for a limited time (180 days).

The default installation path for the BigFix components is `%PROGRAM FILES%\BigFix Enterprise\BES Server`. If you want to change this customizable path, remember that it must be made only by ASCII characters.




Note: On Windows the BigFix V9.5 server and Web Reports components support only 64 bit architecture. For information about the complete list of operating systems supported, see Detailed system requirements.

To install the server, follow these steps:

1. If you have not already done so, run the Installation Guide (**Start > Programs > BigFix > BigFix Installation Guide**). A new panel opens.



2. Click **Install Server**:

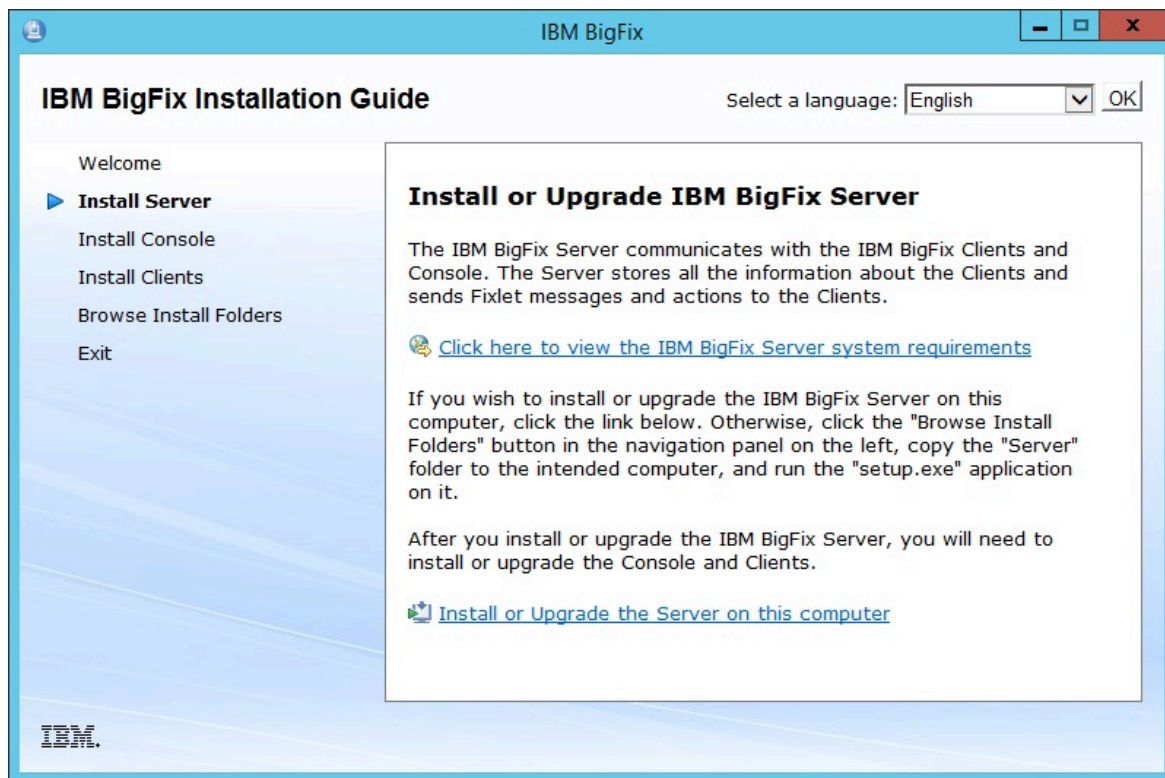


Click **Install the Server on this computer** to install the server locally.

If you want to install the server on a different computer run the following steps:

- a. Click **Browse Install Folders**.
 - b. Copy the Server folder to the target computer.
 - c. On the target computer double-click `setup.exe` to launch the installer.
3. On the welcome page, click **Next**.
 4. Select the features that you want to install and click **Next**.
 5. After reading the **License Agreement**, click **Yes** to accept it and continue.
 6. A dialog displays a list of the Server components about to be installed. In general, accept the default components and click **Next**.
 7. A dialog prompts you to choose a **Single or Master Database** or a **Replicated Database**. Click the first button to create a **Master** database for later replication or if you only need a **Single** database in your deployment. Click the second button to create a **Replica** of an existing Master. If this is your initial installation, click the first button. Click **Next**.

8. A dialog prompts you to choose if you want to **Use Local Database** or **Use Remote Database**. If you want to use another computer to host the BigFix Database, it must have a SQL Server already installed. The most common choice is to use the local database. If you are installing BigFix with a remote database, see [Installing a server with remote database \(on page 127\)](#).
9. The installer prompts you for a destination for the Server components. The default location is `%PROGRAM FILES%\BigFix Enterprise\BES Server`, but you can specify a different location by clicking the **Browse** button. If you want to change this customizable path, remember that it must be made only by ASCII characters. When you have chosen the destination, click **Next**.
10. The Server Properties dialog prompts you to enter a location for the Server web root folder (if different from the default). This is where downloaded files for the Clients will be stored. The default URL is also available for editing, if you want to change it.

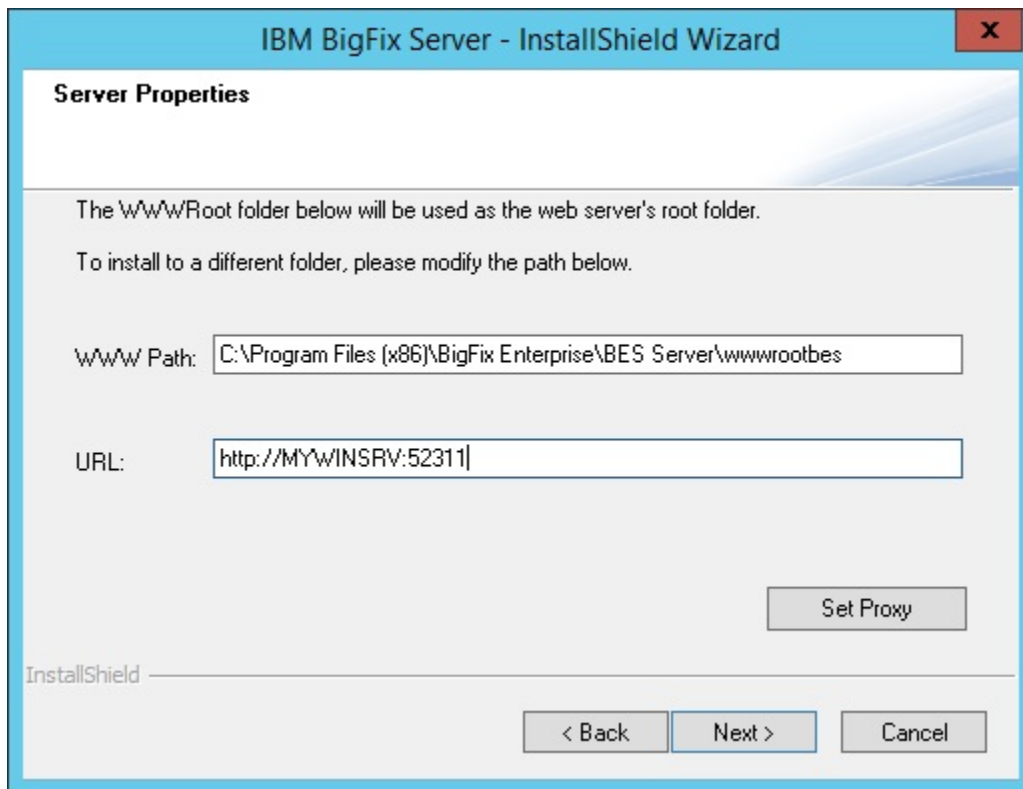



Note: No other application can be listening on the BigFix port or errors will occur. Do not use port number 52314 for the network communication between the BigFix components because it is reserved for proxy agents.

11. In the Server Properties dialog, click **Set Proxy** if a proxy must be used to communicate over the internet to external content sites or to BigFix subnetworks. The **Proxy Settings** panel opens. In this panel you can configure the proxy connection.

Proxy Settings

Proxy

Address Port

Credentials

User

Password

Confirm password

Exception list

Use comma (,) to separate entries.

☐ Enforce proxy tunneling

☐ Use proxy for downstream communication

Authentication Methods

☒ Let the Proxy choose the authentication method

☐ Allow the Proxy to choose between one of the following methods:

FIPS compatible

☐ Basic

☐ Negotiate

☐ NTLM

FIPS not compatible

☐ Digest

12. Specify:

- The host name or IP Address and, optionally, the port number to communicate with the proxy machine.
- The credentials of the user defined on the proxy machine that must be used when establishing the connection.
- The comma-separated list of host names, subdomains, IP addresses that identify systems in the BigFix topology that must not be reached thru the proxy. By default, BigFix V9.5 prevents diverting internal communications towards the proxy. If you set a value in this field, you overwrite the default behavior. To ensure that internal communications are not directed to the proxy, add `localhost`, `127.0.0.1`, `yourdomain.com`, `IP_Address` to the list of exceptions specified in this field.
- Whether or not the proxy is enforced to attempt tunneling. By default the proxy does not attempt tunneling.
- The authentication method to use when establishing the communication. You can either let the proxy choose the authentication method or you can impose to use specific authentication methods.



Note: If you plan to enable FIPS mode, ensure that the proxy configuration is set up to use an authentication method other than digest.

Click **Test Connection** to verify if the connection with the proxy that you configured can be successfully established.

For more information about the values and the syntax to use in these input fields, see [Setting a proxy connection on the server \(on page 427\)](#).

Click **OK** to proceed with the next step.



Note: The proxy configuration specified at this step is saved in the server configuration file `BESServer.config` and it is used also at runtime.

13. The Web Reports Properties dialog prompts you to enter:

- A location for the Web Reports web root folder (`WWWRoot`), if different from the default.
- The port number to use. The default value is:
 - 8080 if you are installing BigFix Version 9.5 earlier than Patch 2 (9.5.2). In this case, during the installation, the Web Reports component is configured to use the HTTP protocol.
 - 8083 if you are installing BigFix Version 9.5 Patch 2 (9.5.2) or later. In this case, during the installation, the Web Reports component is configured to use the HTTPS protocol.

In both cases, if you want, you can modify the Web reports configuration, after the installation completes successfully.

- The user installing the Web Reports component. You can choose to create the user during the installation or to use an already existing user. The default user is *LocalSystem*.
14. The Server installer opens a window displaying the selected installation parameters of the components to be installed. Click **Next** to continue the installation.
 15. The program prompts you to locate your `License.pvk` file. Click the **Browse** button to locate the file. Enter your password to initialize the database and click **OK** to continue.
 16. After the database has been initialized you are prompted to enter your initial username and password for the BigFix console. This is the account used to log in to the console the first time. It is a fully privileged master operator account.
 17. The BigFix server installation is now complete. Ensure that the box labeled Run the BigFix Diagnostic Tool is unchecked and then click **Finish** to exit the wizard.



Note:

If you select to run the diagnostic tools at this stage, some steps are likely to fail (for example, you have not installed a client yet). However, the services and web reports should be running correctly.


18. Follow the instruction listed in Installing the client manually on Windows systems to install the BigFix Client locally on the same Windows system where you installed the Server.
19. On the Windows desktop select **Start > Run the BigFix Diagnostic Tool**. The BigFix Diagnostic Tool tabs show the results of the verification run in your environment. For more information about this tool, see [Running the BigFix Diagnostics tool \(on page 134\)](#).

Installing a server with local database


When performing a fresh installation of BigFix Server Version 9.5 Patch 7, you can either perform an evaluation installation or a production installation.

To install a BigFix server with a production license, perform the following steps:


1. On the computer where you want to install the BigFix server, run the BigFix Server - InstallShield Wizard.
2. Select the features that you want to install.

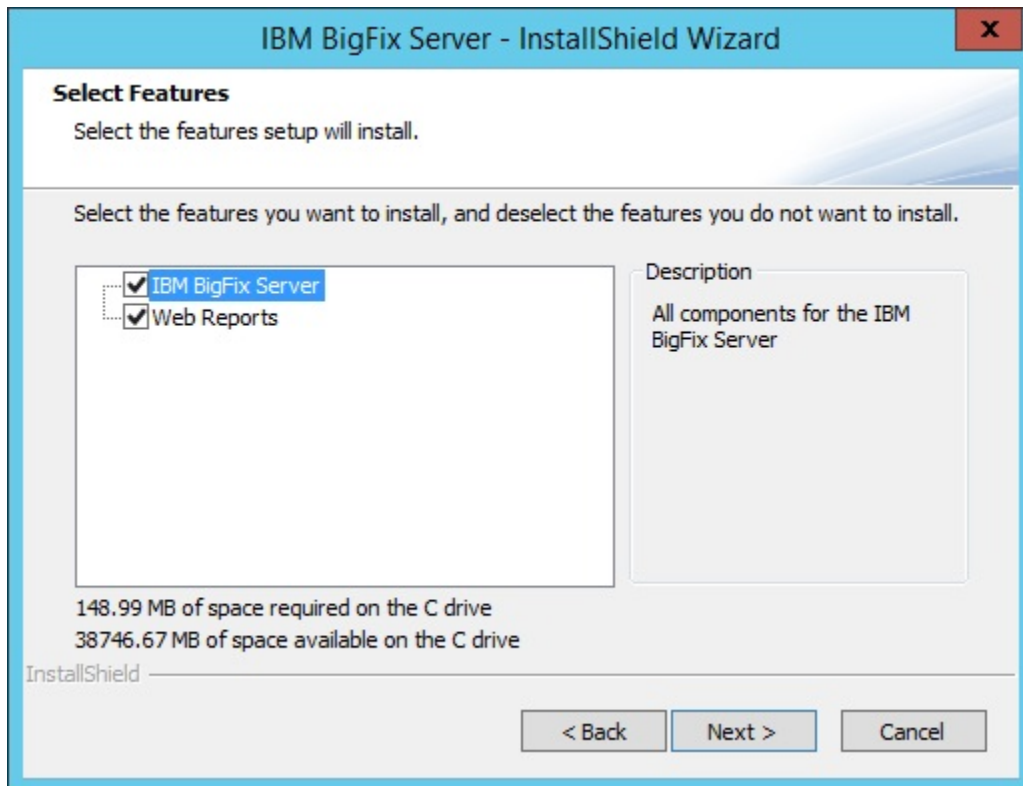


3. During the server installation, select **Single or Master Database** as database replication.

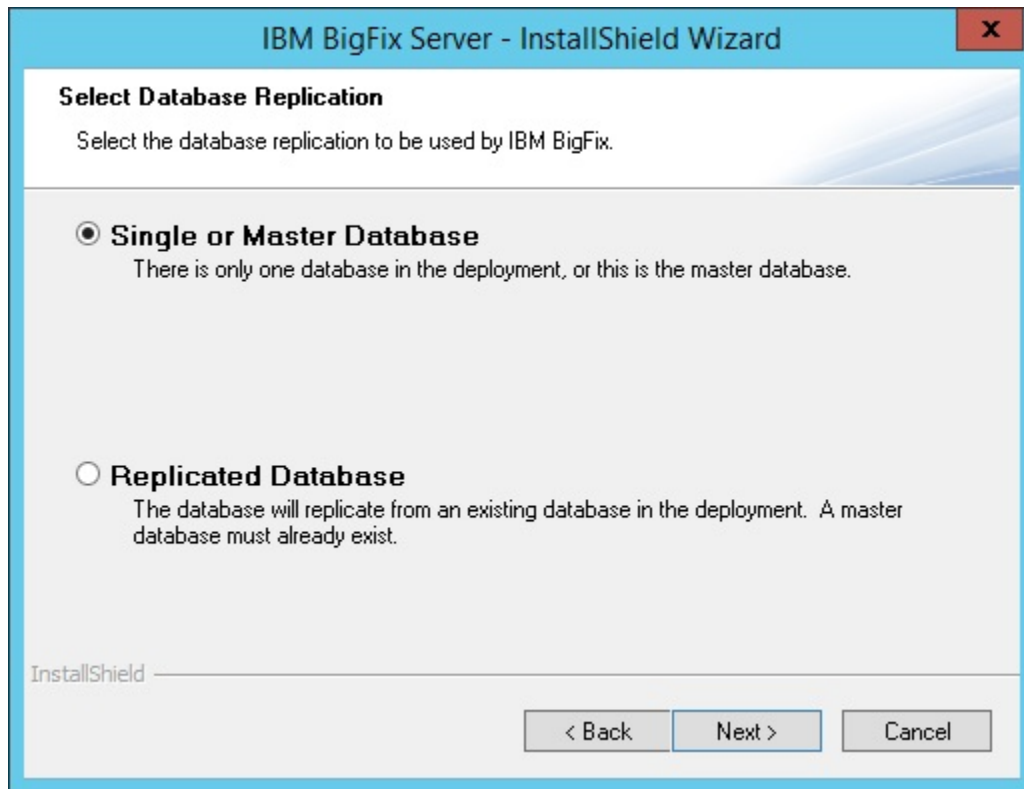

4. Select **Use Local Database** as the type of database.

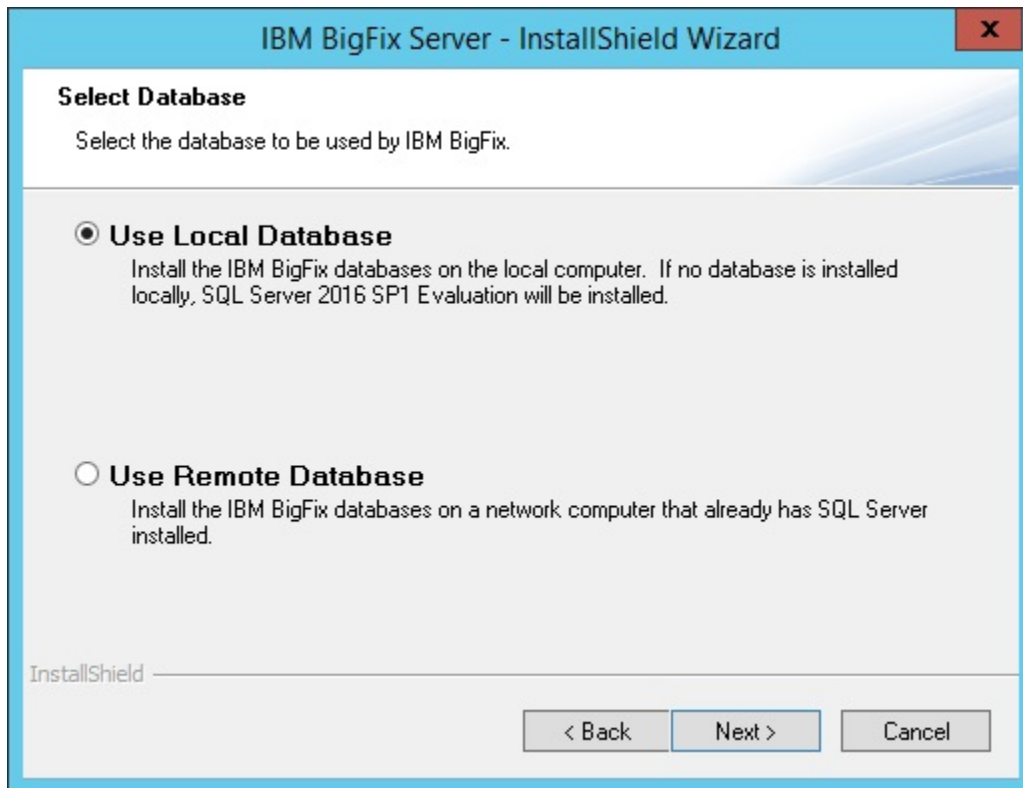


5. If no database engine is detected, an evaluation version of Microsoft SQL Server 2016 SP1 will be installed. The evaluation version is valid for 180 days.

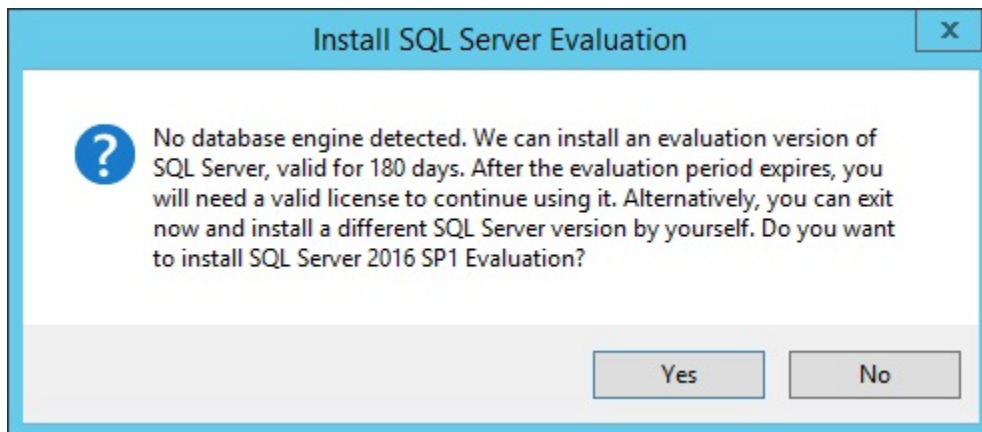


Click **Yes** if you want to proceed with the evaluation version of Microsoft SQL Server 2016 SP1 installation.

6. The set up shows you the destination folder where it installs:

- a. Microsoft SQL Server 2016 SP1 Evaluation.
 - b. BigFix Server.
 - c. The Web server wwwroot folder.
 - d. The Web Reports wwwroot folder.
7. Specify the type of user that will run the Web Reports services, either a custom user or the LocalSystem user.

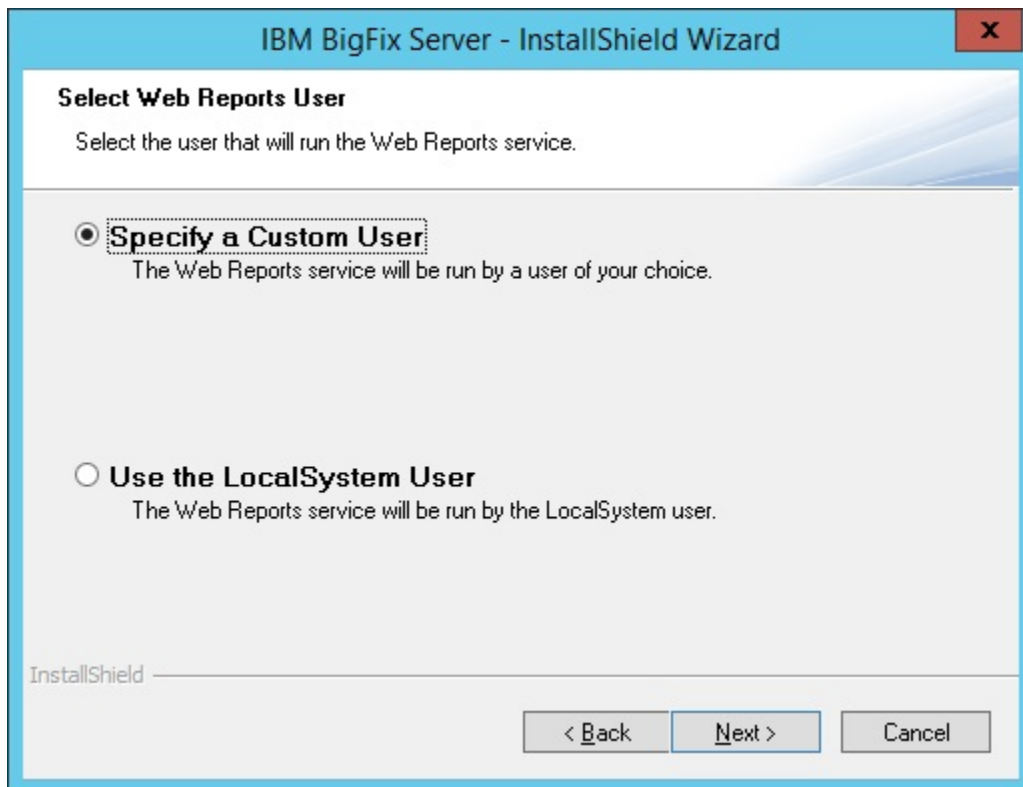

8. If you choose to specify a custom user, you can enter the credentials of an existing Windows user, or enter the information needed to create a new user during the installation:

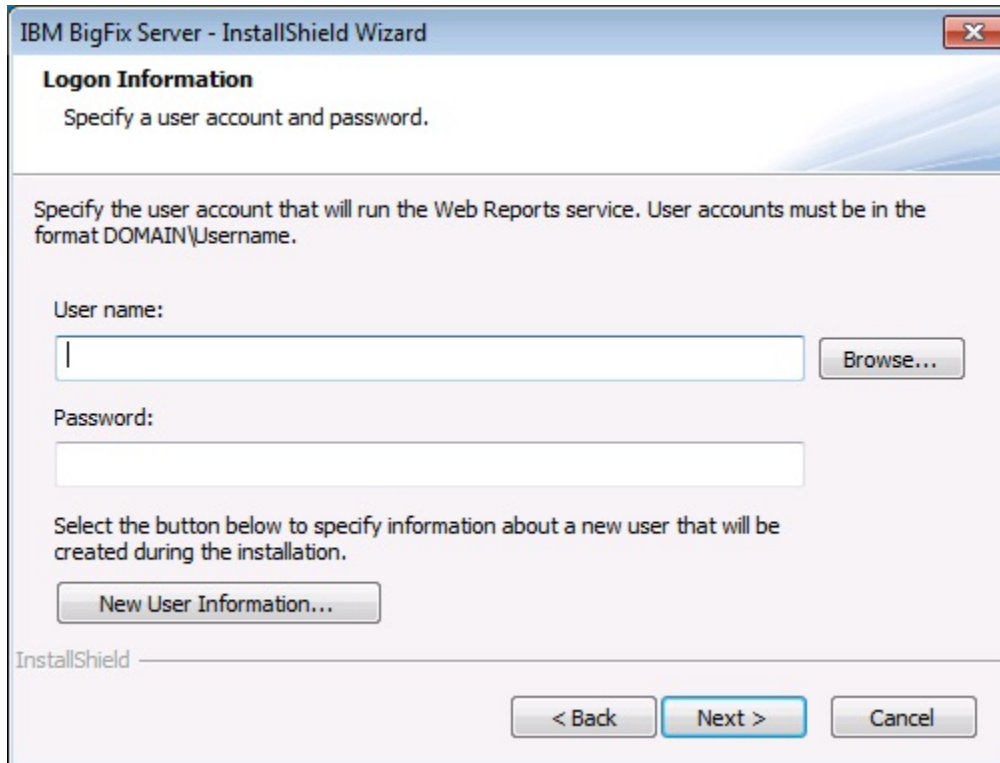


The image shows a Windows-style dialog box titled "IBM BigFix Server - InstallShield Wizard". The main heading is "Logon Information" with the instruction "Specify a user account and password." Below this, a sub-instruction reads: "Specify the user account that will run the Web Reports service. User accounts must be in the format DOMAIN\Username." There are two input fields: "User name:" followed by a text box and a "Browse..." button, and "Password:" followed by a password box. Below the password box, text says: "Select the button below to specify information about a new user that will be created during the installation." with a "New User Information..." button. At the bottom, the "InstallShield" logo is on the left, and three buttons "< Back", "Next >", and "Cancel" are on the right.

9. Review all the installation information displayed and click **Next**.
10. The set up displays the installation progress.

**Note:**

SQL Server 2016 SP1 requires .NET Framework 4.6.2. If BigFix Installation Generator must install SQL Server 2016 SP1, and .NET 4.6.2 is not installed yet, then it will be installed with it.

In this case, the following dialog might seem to hang for several minutes when performing the `Install_DotNet46_Cpu64_Action`:

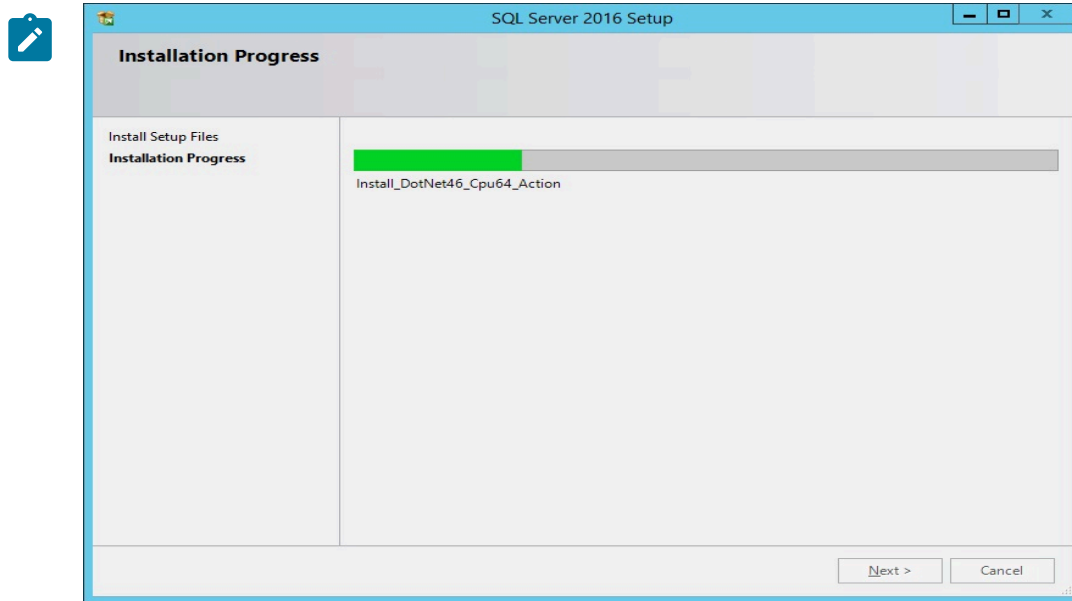

If .NET Framework 4.6.2 is installed with SQL Server, it is normal for this installation step to take about 15 minutes.

If you want to speed up the installation, you can install .NET 4.6.2 prior to launching the BigFix Installation Generator. You can download the .NET installer from:

<https://www.microsoft.com/en-us/download/details.aspx?id=53344>

Troubleshooting the server installation

When performing a production installation of BigFix Server Version 9.5 Patch 7 with a local database, you might receive the following error message:

The installation of SQL Server 2016 SP1 Evaluation failed, and has not been properly set up. Setup will now exit.

If the SQL Server installation fails, ensure that you locate and view the following file:

`%programfiles%\Microsoft SQL Server\130\Setup Bootstrap\Log
\Summary.txt`

If the summary text file reports, for the features Database Engine Services and SQL Client Connectivity SDK, the following details:

Component error code: **1706**

Error description: **An installation package for the product Microsoft SQL Server 2012 Native Client cannot be found. Try the installation again using a valid copy of the installation package sqlncli.msi.**

Perform these steps:

1. Uninstall the SQL Server Native Client **2012** and any components of SQL Server **2016** which were installed.
2. Restart the server.
3. Try running the server installation again.

Installing a server with remote database

Before installing a BigFix server with a remote database, ensure that:

- You install the BigFix Server as a user with SA privileges.
- The SQL Server Browser is running.
- The Windows Authentication or the SQL Server Authentication is enabled.

Creating a new database user

After creating a database instance on the machine where the Microsoft SQL Server is installed, if you do not want to use the SA user for the database connection, you must create a new user with the `sysadmin` server role.

To create a new user for a specific database instance, for example `BIGFIX`, perform the following steps:


1. Start the Microsoft SQL Server Management Studio.
2. In the Connect to Server panel, specify the following parameters:

Server Type


Database Engine

Server Name


<DB_HOSTNAME>\<INSTANCE_NAME> If the server host name is MYWINSRV, and the instance name is BIGFIX, the server name is: MYWINSRV\BIGFIX.

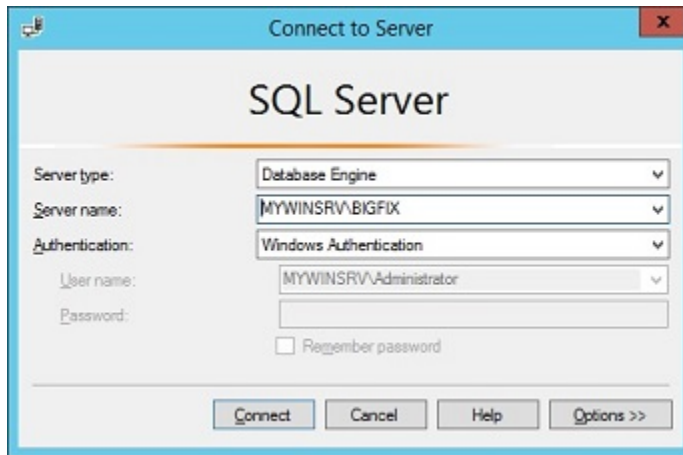

3. From the portfolio, select **Security -> Login -> New Login**.
4. In the **General** tab, specify the User Name and the credential for SQL Server Authentication and click **OK**.
5. In the **Server Roles** tab, select **sysadmin** and click **OK**.

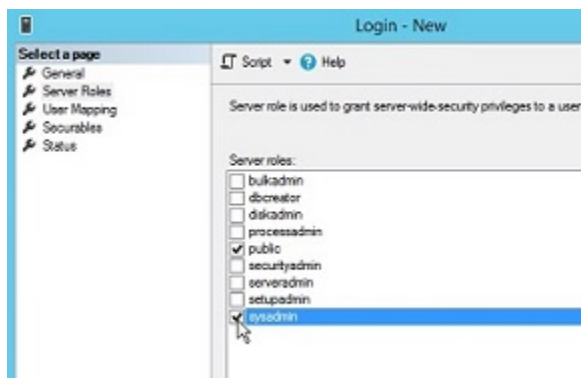


6. In the **Status** tab, ensure that the following selections are displayed and click **OK**.

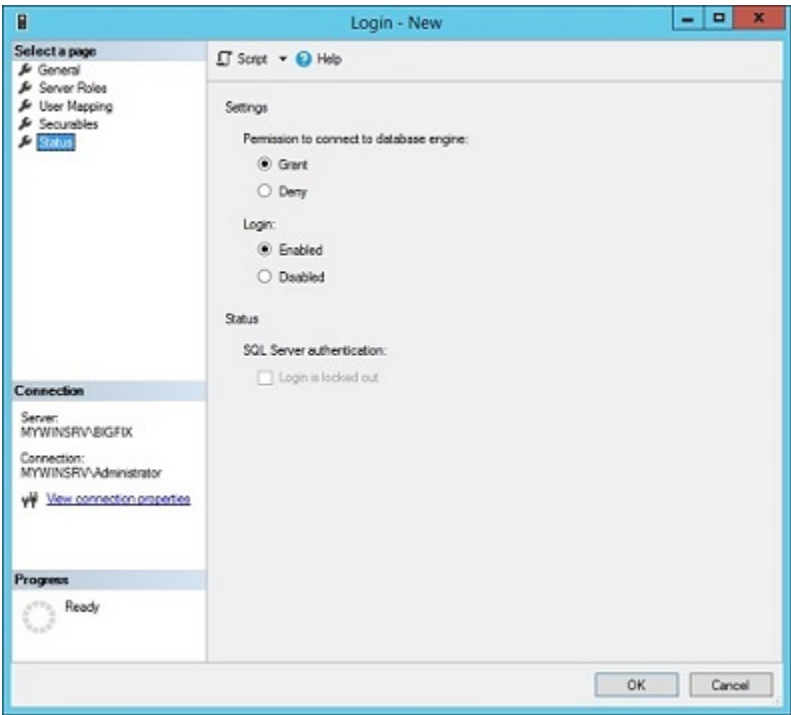

Starting the SQL Server Browser

On the computer where the Microsoft SQL Server is installed, ensure that the SQL Server Browser is running by performing the following steps:


1. Start the **SQL Server Configuration Manager**.
2. Select **SQL Server Services** and start the SQL Server Browser if it is not running:

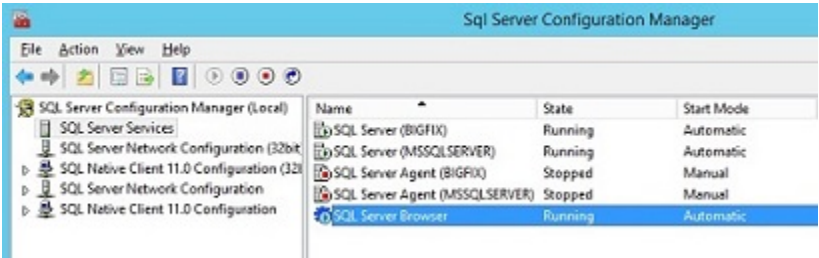

Enabling the SQL Server Authentication Mode

On the computer where the Microsoft SQL Server is installed, ensure that the SQL Server Authentication Mode is enabled by performing the following steps:

1. Start the Microsoft SQL Server Management Studio.
2. Select the database instance.
3. Select **Properties > Security**.

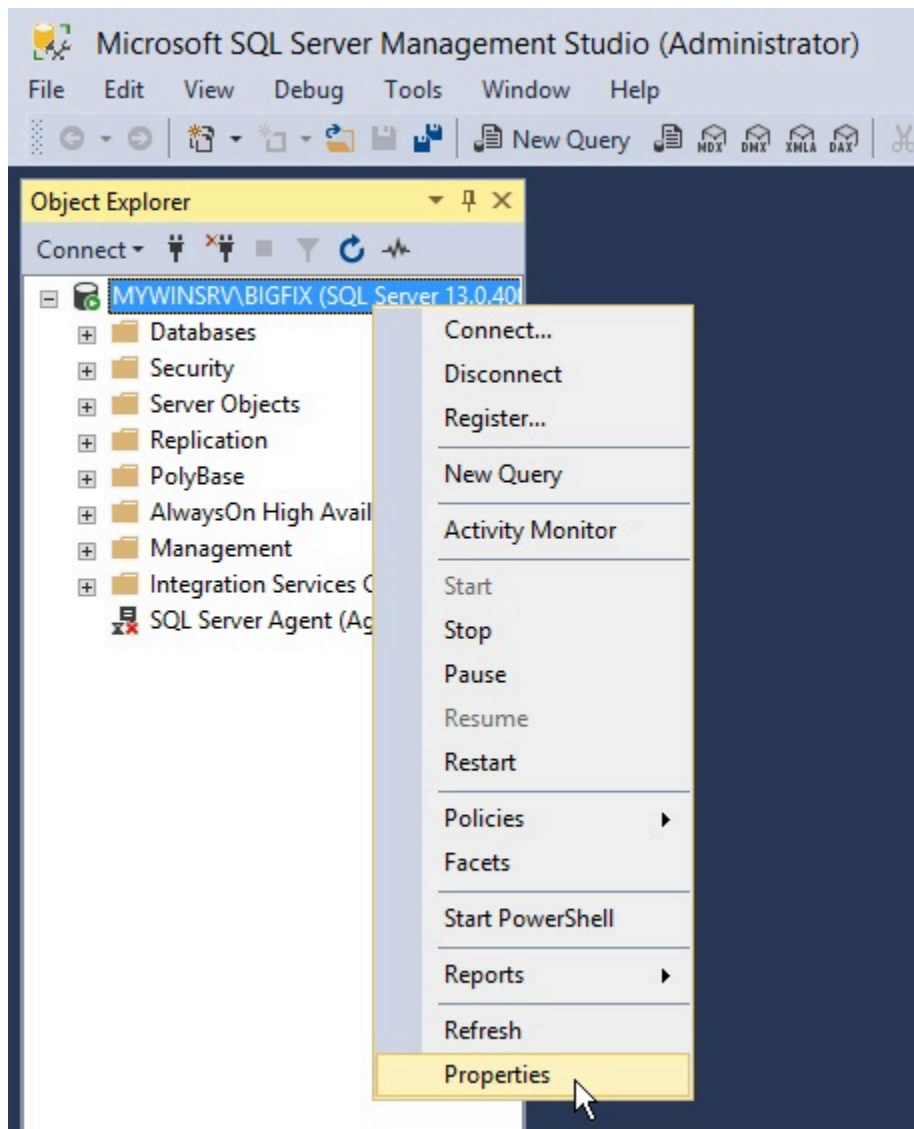


4. Verify that **SQL Server and Windows Authentication mode** is selected.


Installing a server with remote database SQL authentication

To install a BigFix server with a remote database, perform the following steps:

1. On the computer where you want to install the BigFix server, run the installation.
2. During the server installation, select **Single or Master Database** as database replication.

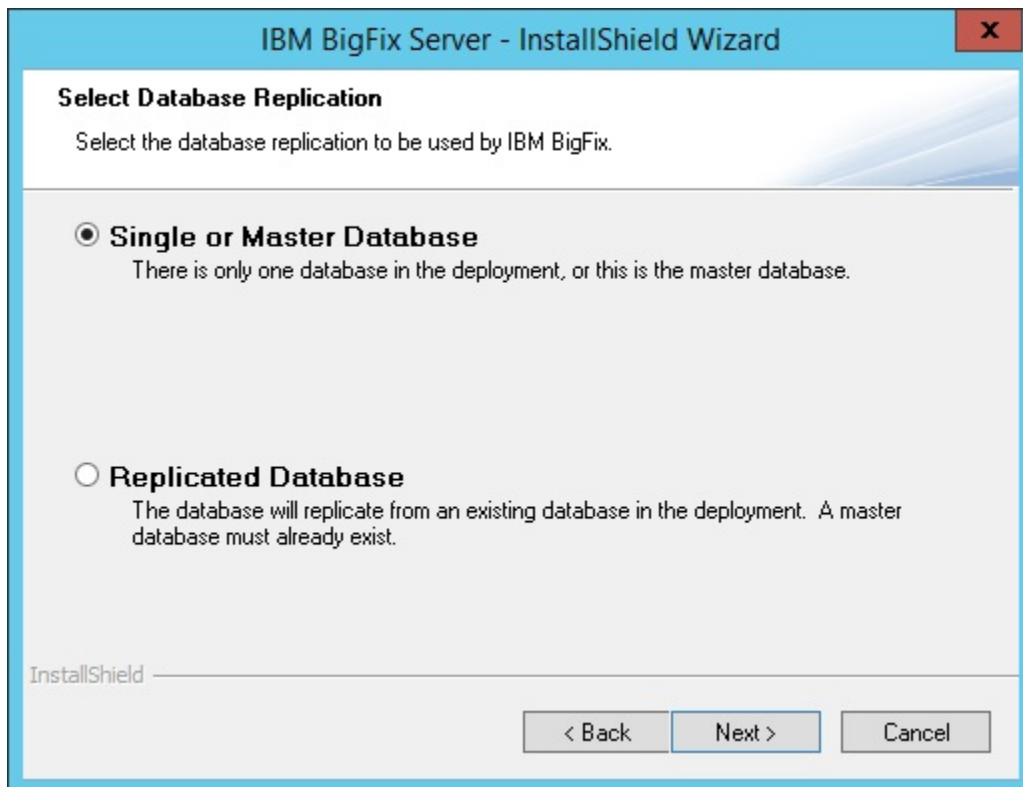

3. Select **Use Remote Database** as the type of database.

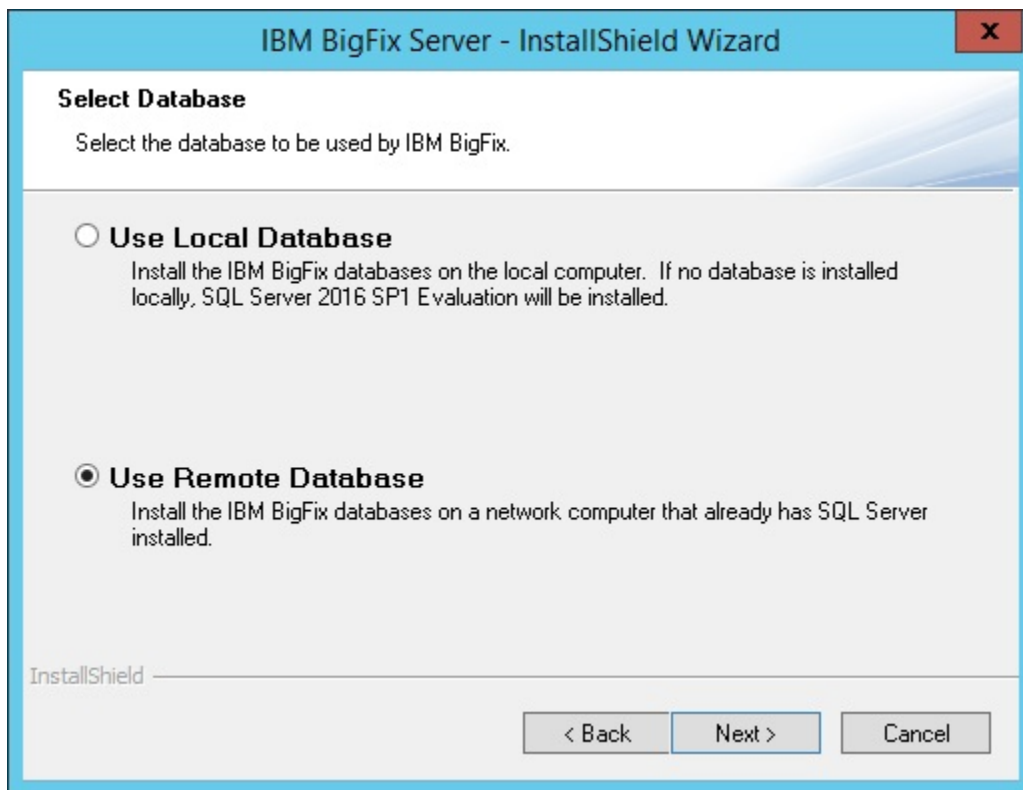

4. In the Database Server window, click **Browse** and select the database server instance you want to use.



Note:

During the installation on Windows Servers, when the installer must connect to the remote SQL Server database engine, the computer might display a message related to the Computer Browser Service:

Computer Browser Error with Windows Authentication

To correct this issue, enable the file and printer sharing option by following these steps:

- a. Go to **Control Panel > Network and Sharing Center**.
- b. Click Change advanced sharing settings.
- c. Click the down arrow next to the network you want to enable file and printer sharing for.



d. Select **Turn on file and printer sharing**.

e. Save the changes.

5. Select the authentication method. If you select **SQL Server Authentication using the login ID and password below**, provide the credentials of the user with SA privileges.



Note: These credentials are stored in clear text in the Windows registry but they get obfuscated after the first time the service using these credentials is started again.

The screenshot shows the 'Database Server' configuration window of the IBM BigFix Server - InstallShield Wizard. The window has a blue title bar with the text 'IBM BigFix Server - InstallShield Wizard' and a red close button. The main content area is white with a blue header bar containing the text 'Database Server'. Below the header, there is a subtitle 'Select database server and authentication method.' and a larger subtitle 'Select the server to use to create the new database. The login used MUST BE THE 'SA' ACCOUNT or have identical privileges.'.

The 'Database Server:' section contains a dropdown menu with the text 'MYREMOTEWINSRV\BIGFIX' and a 'Browse...' button to its right.

The 'Connect using:' section has two radio buttons: 'Windows authentication' (unselected) and 'SQL Server authentication using the Login ID and password below' (selected).

Below the radio buttons, there are two text input fields: 'Login ID:' with the text 'sa' and 'Password:' which is empty.

At the bottom of the window, there is a 'Back' button, a 'Next >' button, and a 'Cancel' button.

The database is created on the remote computer where the Microsoft SQL Server is installed. On the computer where the BigFix Server is installed, the registry is updated with the database authentication credentials.



Note: If you choose to connect to a remote SQL Server database using the Windows authentication, ensure that you:

- Specify a Windows domain user that can access both the local and the remote computer.
- Specify a Windows domain user that has sysadmin privileges on the database engine, at least during this installation and during the following upgrade.

Moreover, if you choose the Windows authentication, the user chosen to access the remote database will run the BigFix Server services and also the Web Reports server service (if present on the same computer).

Running the BigFix Diagnostics tool

The BigFix Diagnostics tool verifies that the server components are working correctly.


It identifies components that are incorrectly configured or non-functional and displays the results. To run the diagnostics, follow these steps:

1. If you have just installed the Server, the Diagnostics Tool should already be running. Otherwise, log on to the Server as an administrator and launch the program.

Start > Programs > BigFix > BigFix Diagnostics Tool.

The program analyzes the server components and creates a report.

2. For more in-depth information, click the **Full Interface**. The BigFix Diagnostic control panel is displayed. This window has tabs corresponding to the categories of server diagnostics, including **Services** and **Web Reports**.

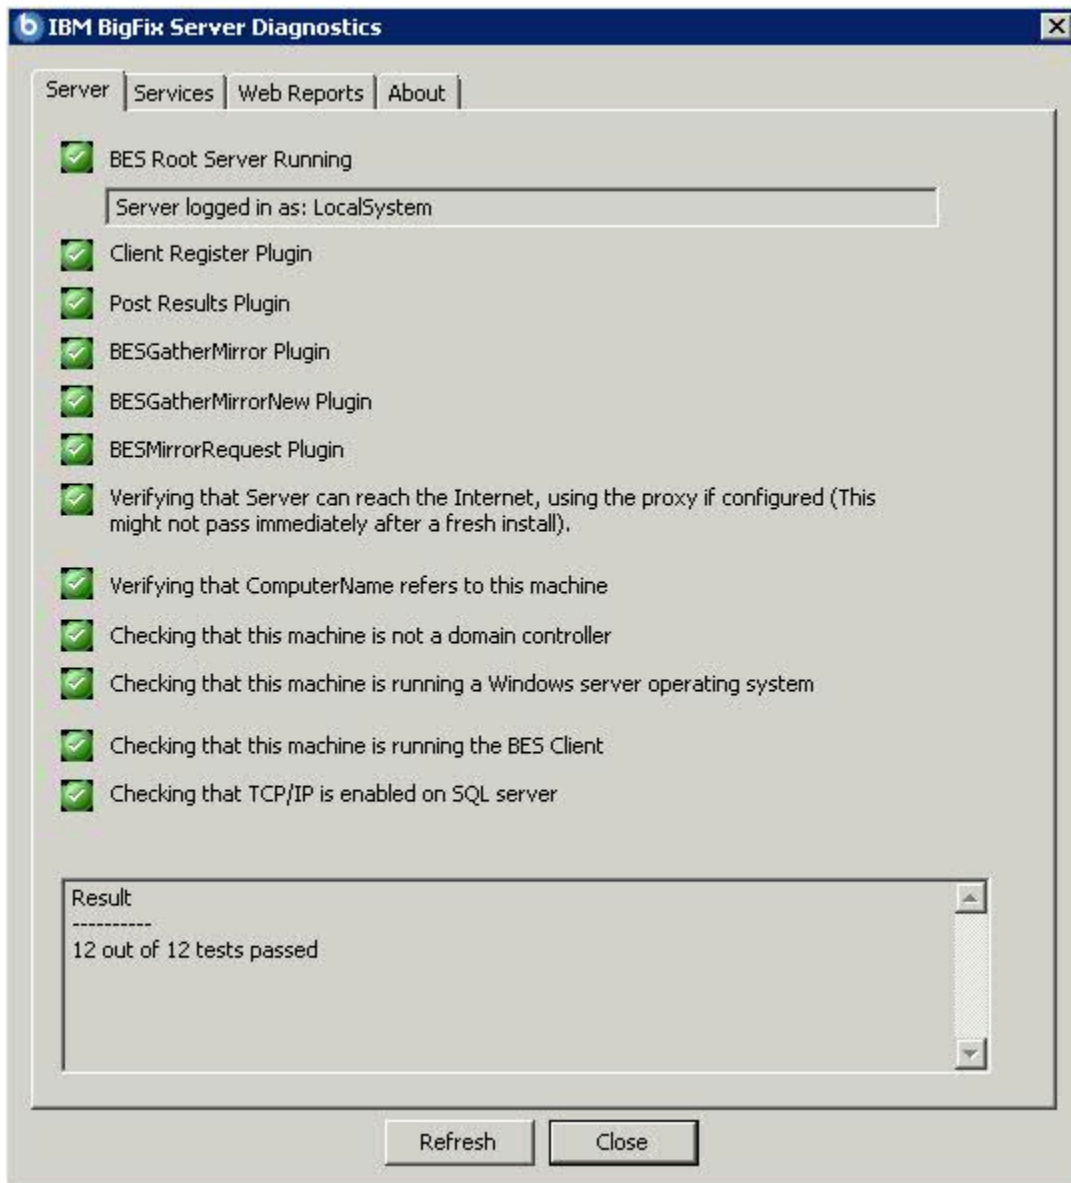

Note: If the message Verifying that the BESGather service can reach the Internet is displayed after a fresh install and you have a proxy, ensure that you configured it as described in [Setting up a proxy connection \(on page 420\)](#).

If you have not yet installed the client, a warning light is shown. It becomes green as soon as you install the client.

3. In the **Services** tab check if the database and gathering services are correctly installed and running.



If a red light is glowing next to an item, it indicates a failure of that component. You must address the stated problem before you can be sure that the Server is functioning correctly. Similarly, there is a tab to diagnose the **Web Reports** server.

4. To find out more information, click the question mark button to the right of any item. These buttons link to knowledge-base articles at the BigFix Support Site.
5. If all the buttons are glowing green, click **Close** to exit the Diagnostic.



Note: If the Server computer is a member of a domain, but you are logged in as a local user, the Diagnostics Tool will sometimes erroneously report that permissions are incorrect. If you see that your permissions tests are incorrectly failing, you can safely ignore the diagnostics warnings.

Installing the Client on Windows

For more details about how to install the Clients, see section [Installing the clients \(on page 227\)](#).

Installing the console

The BigFix console lets the operator monitor and fix problems on all managed computers across the network.

It can be installed on any computer that can make a network connection via HTTPS port 52311 to the server. Except in testing or evaluation environments, do not run the console on the server computer itself due to the performance and security implications of having the publisher key credentials on a computer that is running a database or web server.

To install the console, follow these steps:


1. Run the Installation Guide (**Start > Programs > BigFix > BigFix Installation Guide**). Click **Install BigFix Components**.
2. From the next panel, click **Install Console**.
3. When prompted, enter the installation location for the console. The default location is `%PROGRAM FILES%\BigFix Enterprise\BES Console`. To choose another destination, click **Browse** and navigate to the desired location. Click **Next** to continue.
4. After the files are installed, click **Finish** to complete the installation. You can now choose to launch the console, or continue to the next section to install the clients.

For more details about using the console program, see the BigFix Console Users Guide.

Installing a stand-alone Web Reports server


By default, the Web Reports component is installed along with the BigFix server.

However, you can choose not to install this component by deselecting the related check box in the following dialog:

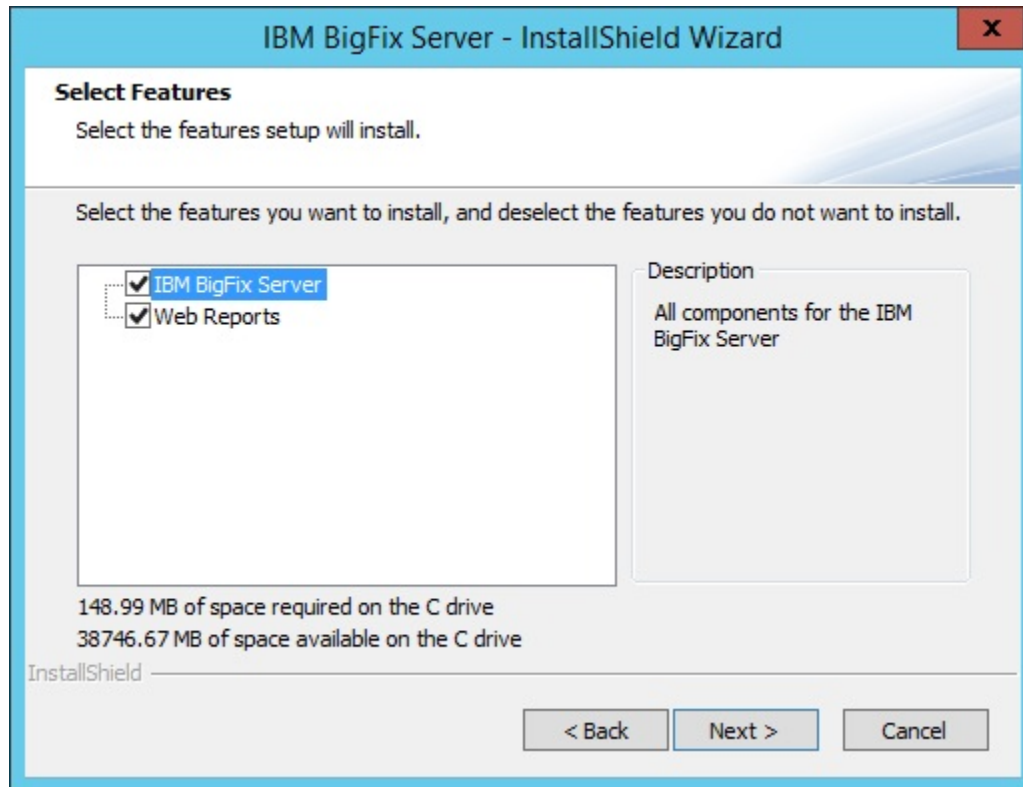


You can install it later only on a different system by running the following steps:


1. Copy the **BESInstallers\Server** directory from your BigFix server to the system where you want to install the stand-alone Web Reports server.
2. From the Server directory, run the setup.exe program to start the server installer.
3. Select to install only the Web Reports component in this dialog:

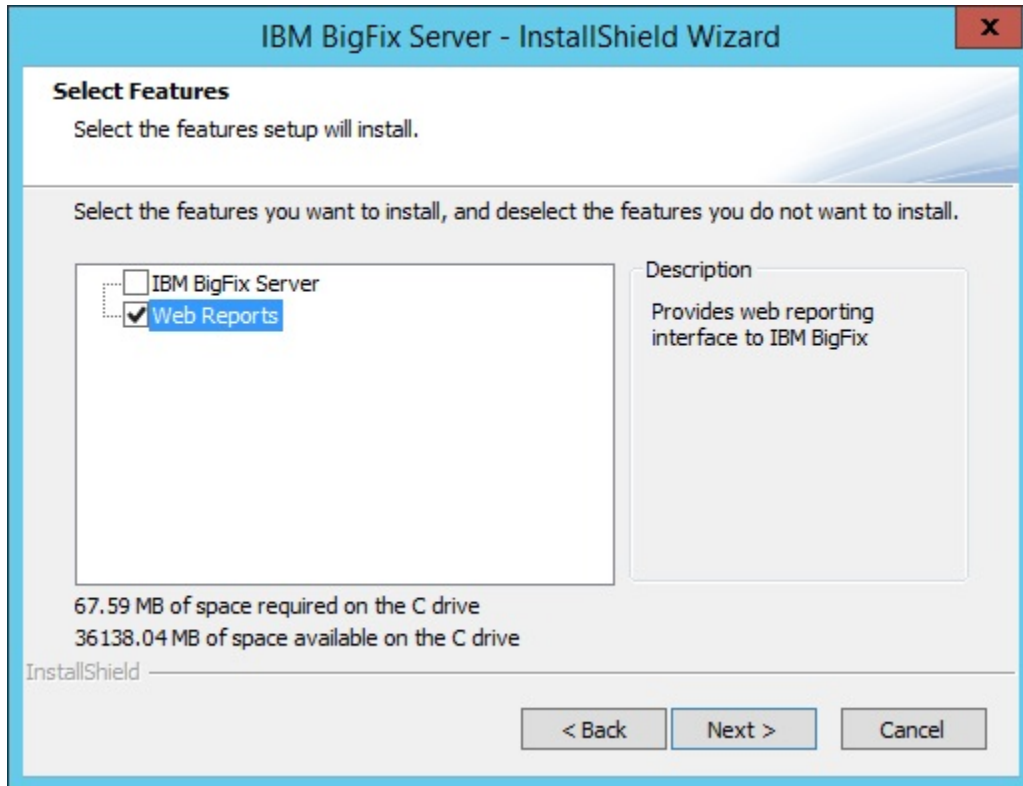

4. Complete by choosing the database options that applies to your configuration. If you select **Use Remote Database**, complete the following configuration steps:
 - a. On the **Database Server** window select the desired authentication method. If you choose Windows authentication, you must later on modify the Web Reports service logon to use a Windows authenticated user logon.
 - b. On the **Select Features** dialog, ensure that only the **Web Reports** check box is selected.
 - c. Choose the appropriate **Destination Location**.
 - d. Choose where the Web Reports server will have its root directory and click **Next**.
5. Starting from V9.5.3, you can specify the type of user that will run the Web Reports services in this dialog:

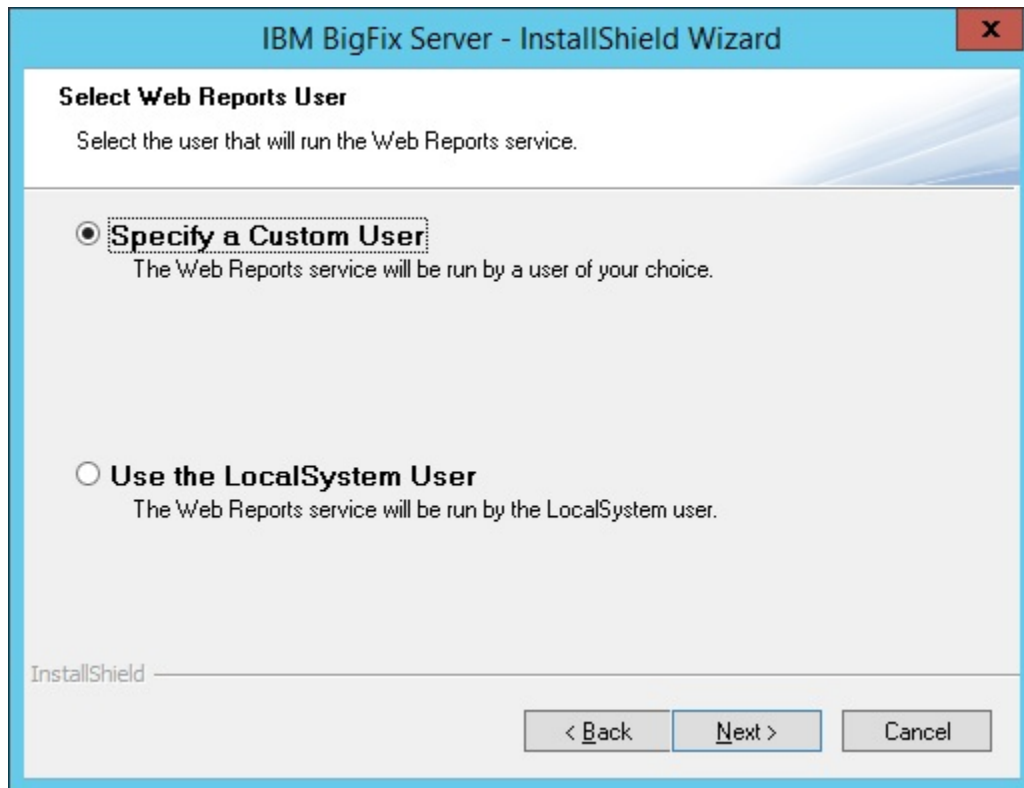


- a. If you choose to specify the LocalSystem User, you continue with step 7 and review the installation parameters. If you choose to specify a custom user, you see the following dialog:

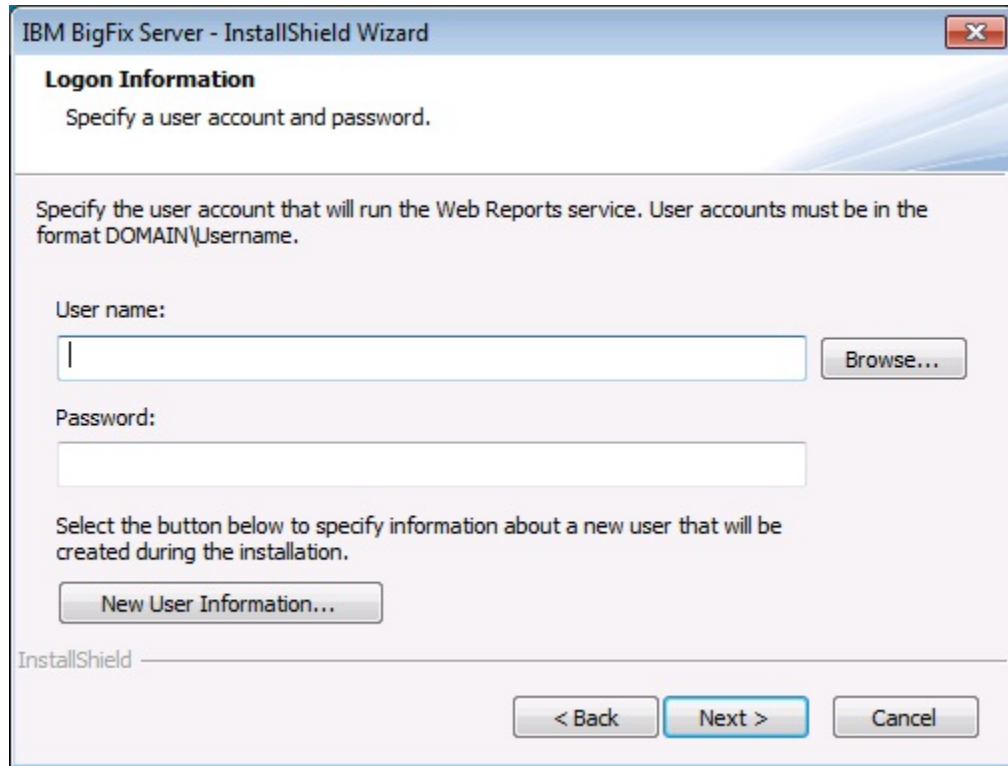

The image shows a Windows-style dialog box titled "IBM BigFix Server - InstallShield Wizard". The main heading is "Logon Information" with the instruction "Specify a user account and password." Below this, a text box explains: "Specify the user account that will run the Web Reports service. User accounts must be in the format DOMAIN\Username." There are two input fields: "User name:" and "Password:". The "User name:" field has a "Browse..." button to its right. Below the password field, a text box says: "Select the button below to specify information about a new user that will be created during the installation." Below this is a button labeled "New User Information...". At the bottom of the dialog, there are three buttons: "< Back", "Next >" (which is highlighted with a blue border), and "Cancel". The "InstallShield" logo is visible in the bottom left corner.

where you can specify an existing local user. This user does not need to have any particular rights or to belong to a group with particular rights to be used as a Web Reports installation user. Enter manually the user name and password or click the Browse button to select the user. If you want to create a new user, click **New User Information**, and enter the required information in this dialog:

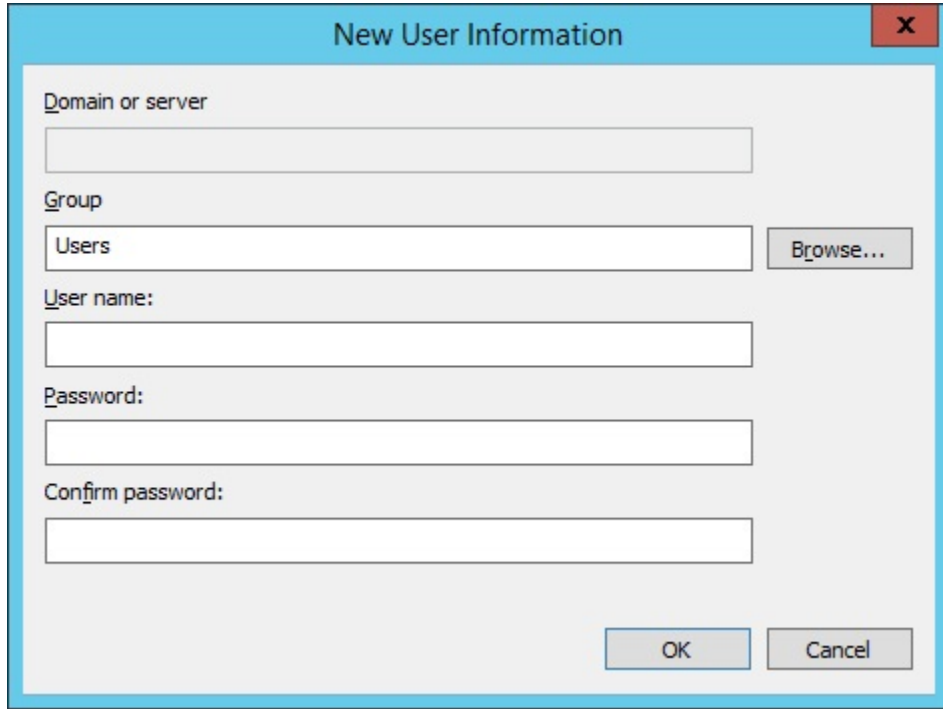A screenshot of a Windows-style dialog box titled "New User Information". The dialog has a blue title bar with a red close button (X) in the top right corner. The main area is light gray and contains several input fields and buttons. The fields are labeled: "Domain or server" (empty), "Group" (containing "Users"), "User name:" (empty), "Password:" (empty), and "Confirm password:" (empty). To the right of the "Group" field is a "Browse..." button. At the bottom right of the dialog are "OK" and "Cancel" buttons.

Note: If you are upgrading from earlier versions, the Web Reports service user remains the same as before the upgrade.

6. Review the installation parameters and click **Next** to trigger the installation.
7. Specify the database login for the server components and authentication method and click **Next**.
8. Configure a data source to specify the BigFix server from where the data are collected. To create or modify a data source, see the procedure in [Datasource Settings](#).



Note: If you run a fresh installation of Web Reports V9.5.2 or later, the HTTPS configuration is automatically enabled on port 8083. After the installation completes successfully, you can switch to the HTTP configuration by changing the value of the `_WebReports_HTTPServer_UseSSLFlag` setting to 0. For more information, see Customizing HTTPS on Web Reports.

Installing the WebUI

Use this procedure to install the WebUI on BigFix Version 9.5.11 or later.

Prerequisites: Before running this procedure, ensure that you installed the BigFix client.



Note: You can install the WebUI component either locally on your BigFix server or on a different client computer of your environment. Only one WebUI installation is supported in your BigFix environment.




Note: You can install the WebUI component on Windows Server 2016 or Windows Server 2019.



Note: To install the WebUI component on a different computer, you can use the Fixlet named **Install BigFix WebUI Service (Version 9.5.x)**. For more details, see [Installation Procedure](#).


To manually install the BigFix WebUI component, perform the following steps:

1. If you are installing the WebUI component on a remote client computer of your environment and not on your BigFix server, ensure that you copy from the server to the remote client computer:
 - The **setup.exe** file located in the **BigFix Enterprise\BES Installers\WebUI** server directory.
 - The certificates that you have generated for the client computer where you will install the WebUI by running the `BESAdmin.exe /createwebuicredentials` command on the server. For more details about the command, see [BESAdmin Windows Command Line \(on page 299\)](#).
2. Run the **setup.exe** file located in the **BigFix Enterprise\BES Installers\WebUI** directory to launch the InstallShield Wizard for the BigFix WebUI.
3. If you are installing the WebUI component on the same computer where you installed your BigFix server (local WebUI), you will see the following dialog. Otherwise, if you are installing a remote WebUI, skip this step and move to step 4.

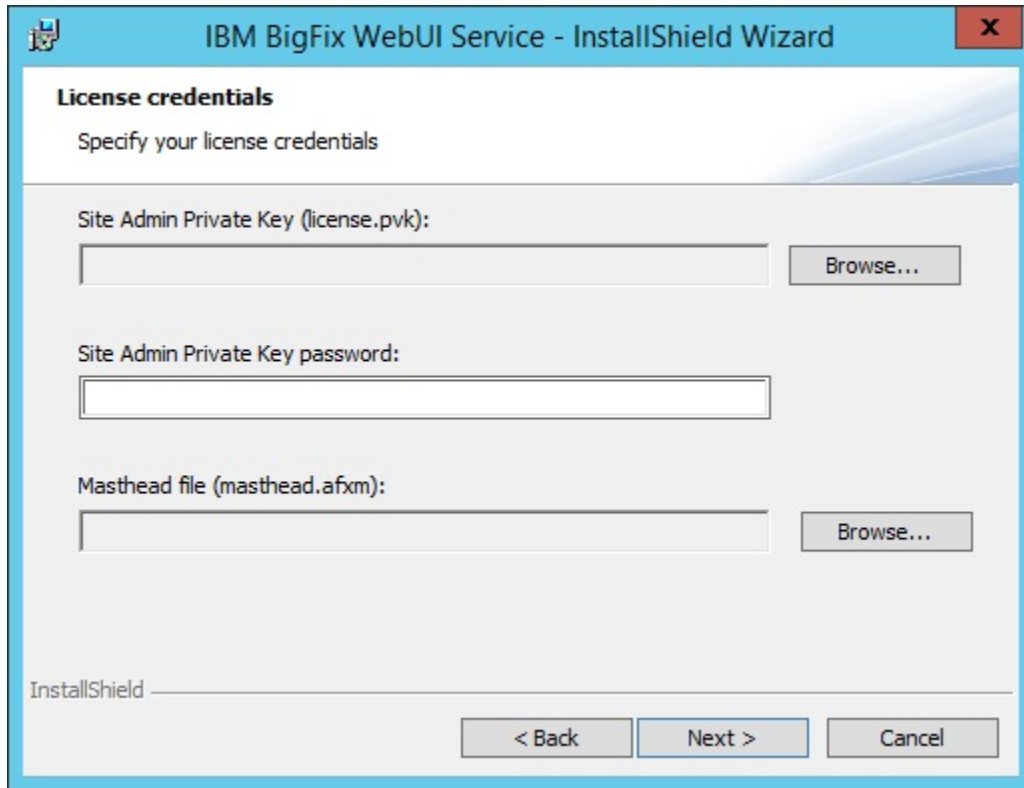

The image shows a Windows dialog box titled "IBM BigFix WebUI Service - InstallShield Wizard". The dialog has a blue header bar with the title and a close button (X). Below the header, the text "License credentials" is displayed in bold, followed by the instruction "Specify your license credentials". The main area contains three input fields: "Site Admin Private Key (license.pvk):" with a text box and a "Browse..." button; "Site Admin Private Key password:" with a text box; and "Masthead file (masthead.afxm):" with a text box and a "Browse..." button. At the bottom, there is a "Back" button, a "Next >" button, and a "Cancel" button. The "InstallShield" logo is visible in the bottom left corner.

- Provide the location of the license.pvk file and the corresponding password. Specify the location of your masthead file. Click Next, skip the next step and move to step 5.
4. If you are installing the WebUI component on a computer where the BigFix server is not installed (remote WebUI), you will see the following dialog.

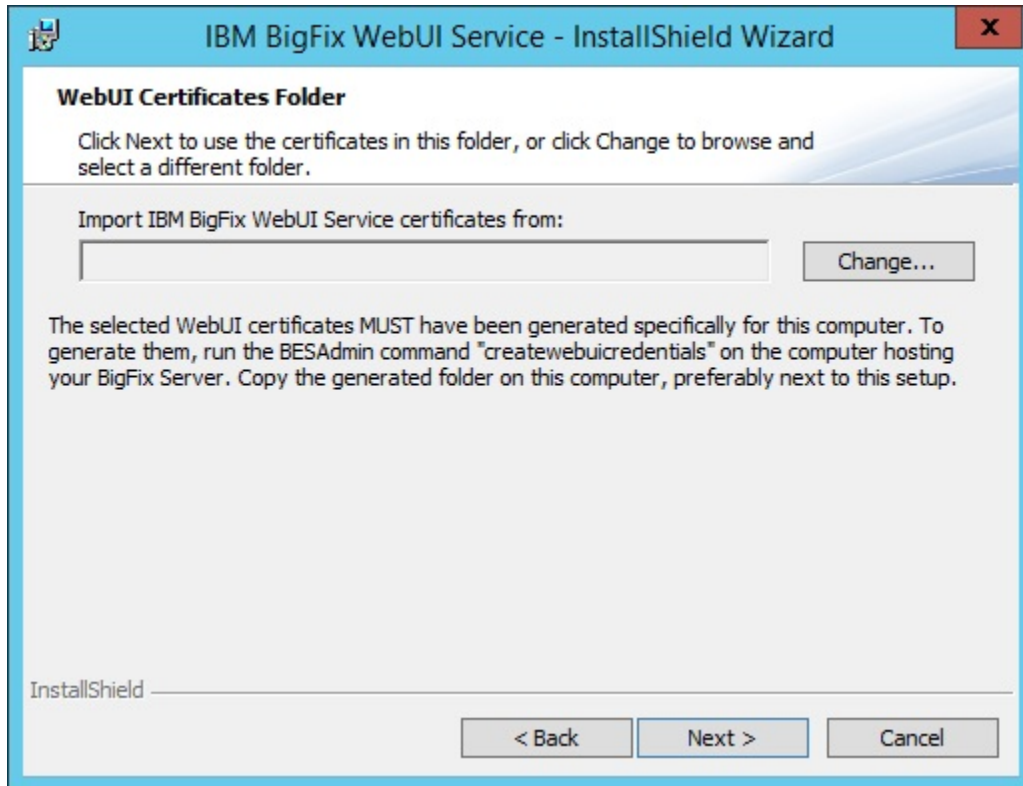


If you have a folder named **cert_hostname** in the same directory where the **setup.exe** file of the WebUI component is located, this folder will be the default directory used by the installer. Otherwise, browse and select the folder containing the following files:

- ca.crt
- auth_cert.crt
- auth_key.key




Note: The certificates must have been generated for the computer where you are installing the WebUI. To generate the certificates, run the `BESAdmin.exe / createwebuicredentials` command. For more details about the command, see [BESAdmin Windows Command Line \(on page 299\)](#).

5. Browse and select the WebUI installation folder, if different from the default folder.

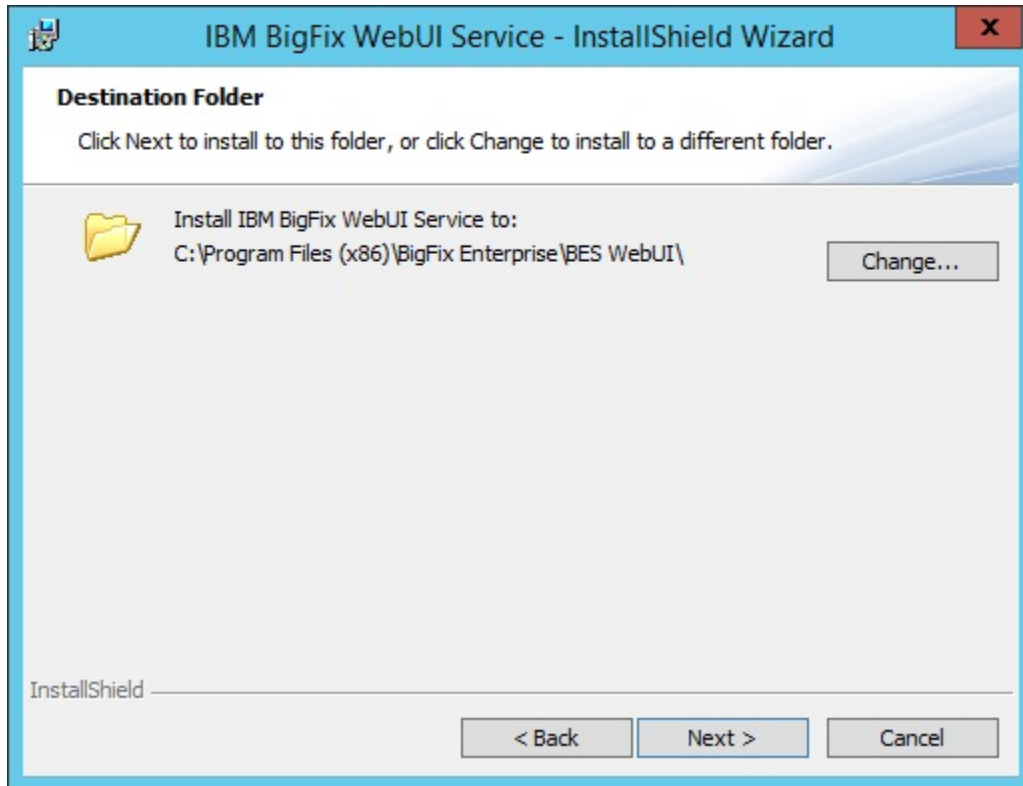

6. Specify the BigFix database server and the related authentication method. You can connect to the database by using either the Windows authentication or the SQL Server authentication. For the WebUI to function properly, you must specify a user with sysadmin privileges.

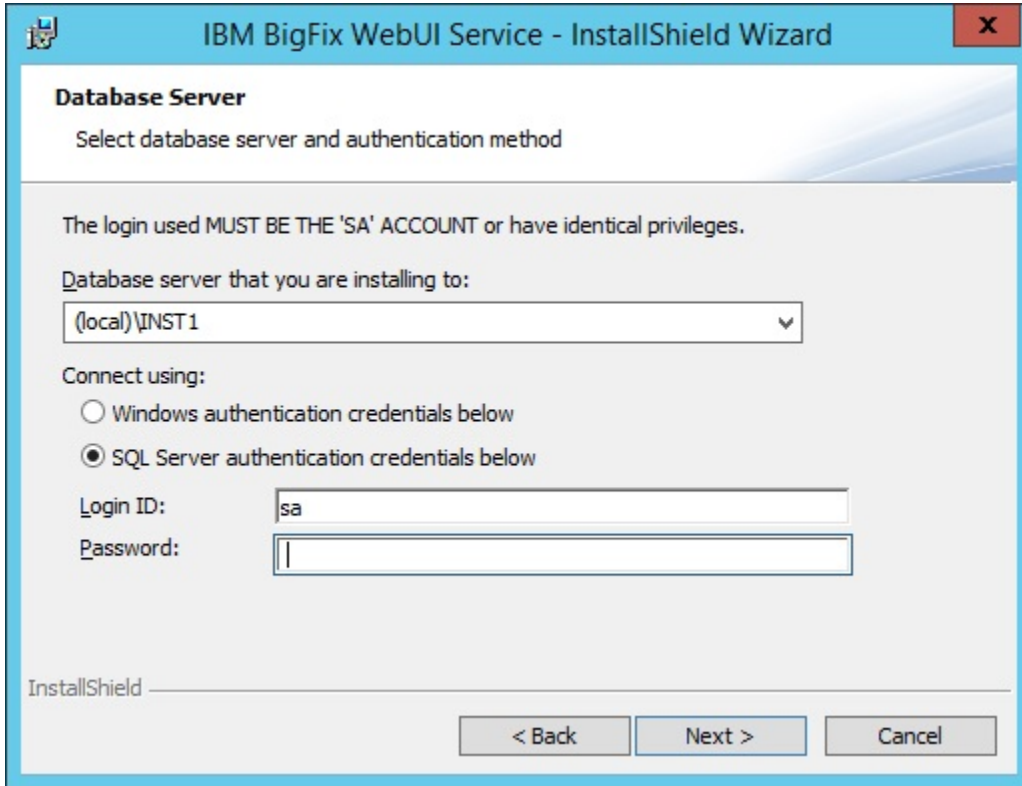

The screenshot shows the 'Database Server' step of the 'IBM BigFix WebUI Service - InstallShield Wizard'. The window has a blue title bar with the IBM logo and a close button. The main content area is white with a blue header bar. The header bar contains the text 'Database Server' and 'Select database server and authentication method'. Below this, a note states: 'The login used MUST BE THE 'SA' ACCOUNT or have identical privileges.' The 'Database server that you are installing to:' is set to '(local)\INST1'. Under 'Connect using:', the 'SQL Server authentication credentials below' option is selected. The 'Login ID:' field contains 'sa' and the 'Password:' field is empty. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'InstallShield' logo is visible in the bottom left corner.

IBM BigFix WebUI Service - InstallShield Wizard

Database Server
Select database server and authentication method

The login used MUST BE THE 'SA' ACCOUNT or have identical privileges.

Database server that you are installing to:
(local)\INST1


Connect using:
☐ Windows authentication credentials below
☒ SQL Server authentication credentials below

Login ID: sa
Password:

InstallShield

< Back Next > Cancel

7. Click **Install** to proceed with the BigFix WebUI installation.

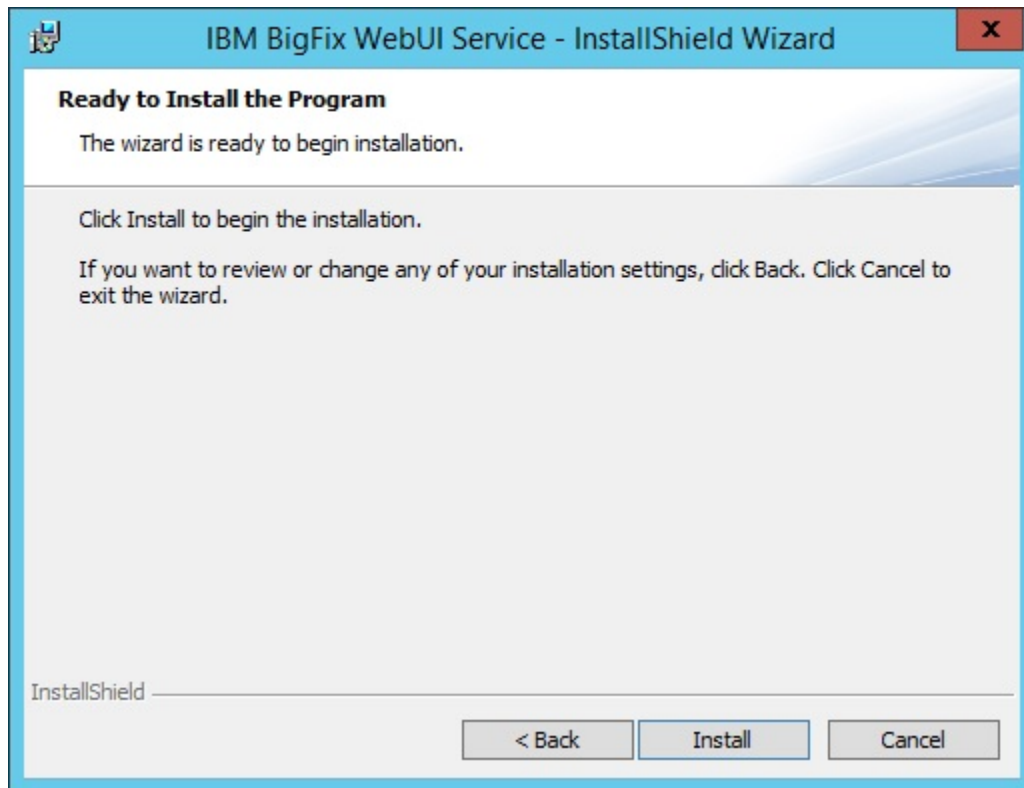


8. The installation process might take several minutes. When the installation completes, click **Finish** to exit the wizard.

Removing the Product Components on Windows systems

You can have one or more BigFix components installed on a local system and you can decide to remove one or all of them at the same time.

To uninstall one or more BigFix components installed on a local Windows system, run the following steps:

1. Visit [BigFix Enterprise Suite Download Center](#).
2. Open the release page associated with the version you are using and download the **BESRemove.exe** utility (listed under the **Utilities** section).
3. Double-click **BESRemove.exe** to run the utility.

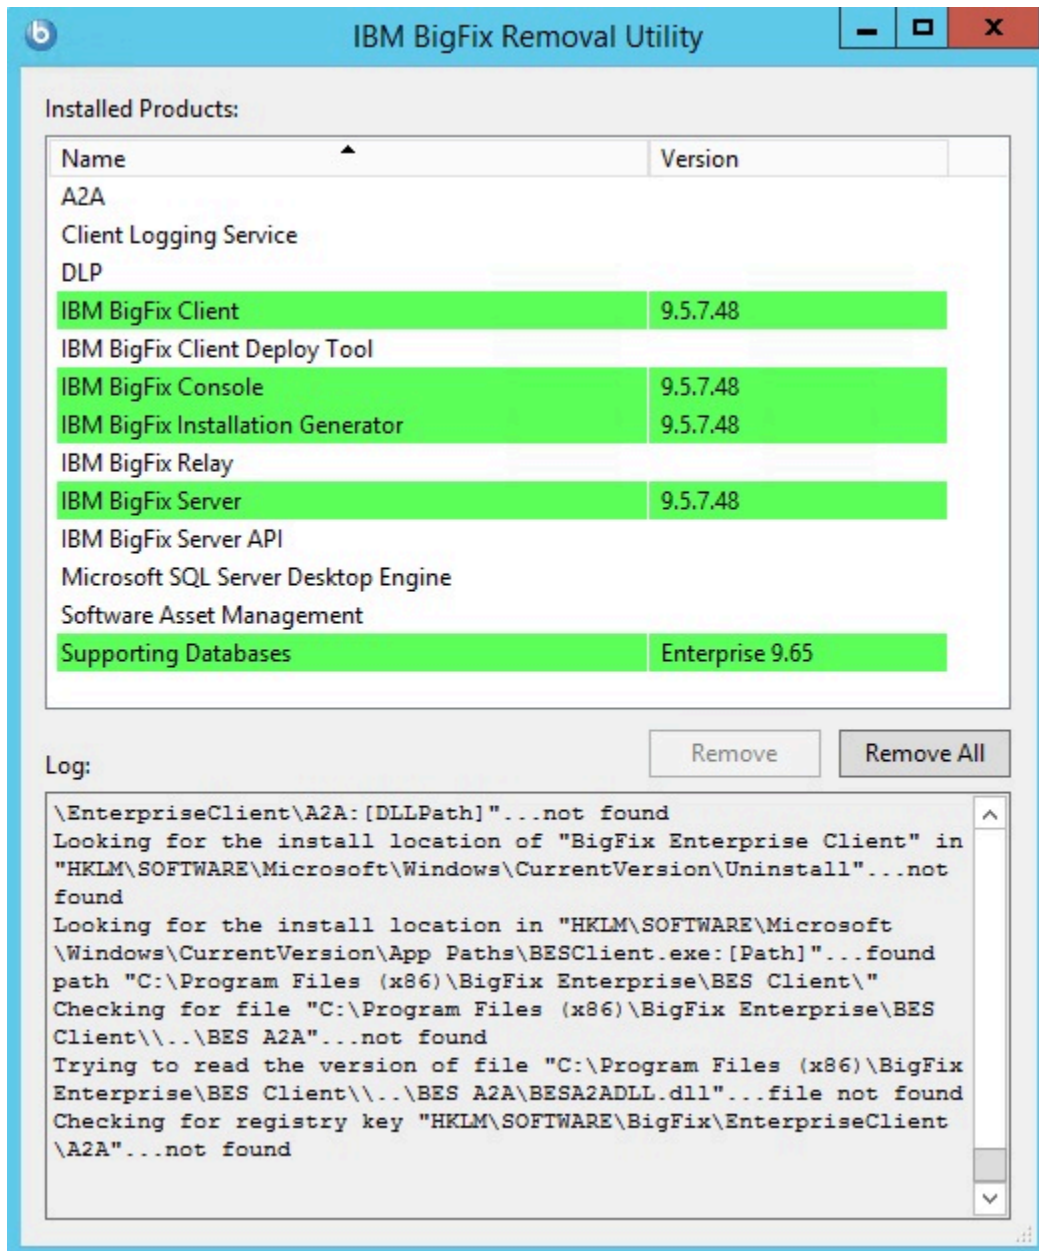

4. Select the components that you want to uninstall and then click **Remove**, or click **Remove All** to remove from the system all the BigFix components installed.

DSA on Windows

Installing Additional Windows Servers (DSA)

Before proceeding with this section, determine your authentication method and complete the appropriate steps in [Authenticating Additional Servers \(on page 153\)](#).

For each additional server that you want to add to your deployment, make sure it can communicate with the other servers, and then follow these steps:

1. Download the BigFix Server installer having the same version as the one installed on the master server.
2. Copy the `license.pvk` and `masthead.afxm` files from the master server to each computer where you intend to install an additional DSA Server.
3. Each DSA Server must have **its own** SQL Server database engine, either local or remote. Ensure that each server uses the same SQL Server version. Do not use the same database engine to store the databases of two different DSA servers. Each DSA Server must be able to access its own database engine and also the database engines of the other DSA Servers.
4. Use the same authentication method to access all the SQL Server database engines, either *Windows authentication* or *SQL Server authentication*. If you chose the Windows authentication method, use the same domain user to access all your database engines. If you chose the SQL Server authentication method, use the same user name and password. Ensure that your database user has sysadmin privileges on all database engines.
5. If you are extracting the server installer from the Installation Generator, select **Production Deployment**, and **I want to install with an existing masthead**. Specify the `masthead.afxm` file from the master server.
6. On the dialog of the server installer, choose a combination of components that includes the BigFix Server. Do not install the WebUI component on the secondary DSA servers.
7. On the **Select Database Replication** dialog of the server installer, select **Replicated Database**.
8. On the **Select Database** dialog, select **Local Database** to host the server's own database locally (typical for most applications). When choosing this option, the user that is installing the server will be used to access the server's own database through Windows authentication.



Note: You can also select a remote database hosted on a different computer. In this case ensure that the computer you are installing BigFix on can resolve the hostname of the remote server where the database resides. For additional information see [Installing a server with remote database \(on page 127\)](#).

9. Proceed through the installation dialogs until the **Database Connection** dialog. Enter the hostname or IP address of the computer hosting the database of your primary server, and the credentials of an account with db_owner permissions on the BFEnterprise database.

10. The BigFix Administration Tool displays a pop-up dialog containing an error message in red, which describes a failed connection to the database that the server is trying to replicate from. Ignore this error message and click **OK**.
11. If you select the check box **Run the BigFix Diagnostic Tool** on the last installation dialog, after you click **Finish**, the BigFix Server Diagnostics displays a pop-up dialog containing several test failures. Ignore this dialog and click **Close**.
12. On the master server, run the resign security data command by using the BigFix Administration tool.

```
.\BESAdmin.exe /resignsecuritydata
```


For additional information on the command, see [BESAdmin Windows Command Line \(on page 299\)](#).

13. Verify that the other servers have been replicated.

Post installation steps

1. Depending on the authentication method used to access the SQL Server database engine:

- If you are using Windows Authentication, ensure that the user running the Filldb service on all DSA servers of your environment is the same Windows domain user. This user must have access to all database engines used by your DSA servers. If needed, change the Log On settings of the Filldb service on all your DSA servers accordingly and then restart the service.
- If you are using SQL Authentication, stop the Filldb service on all your DSA servers, open the registry key `HKLM\Software\Wow6432Node\BigFix\Enterprise Server\Filldb` and add the following string values to all your DSA servers:

```
ReplicationDatabase = BFEnterprise  
ReplicationUser = <login name>  
ReplicationPassword = <password>
```

and restart the Filldb service.

2. On the newly-installed server, run the BigFix Administration Tool and select the **Replication** tab to see the current list of servers and their replication periods. Select the newly-installed server from the pull-down menu, and verify in the list below that it is successfully connected to the primary server. Then select the primary server in the server drop-down, and verify that it is correctly connected to the new server. You might need to wait for the next replication period before both servers show a successful connection.



Note: The initial replication can take several minutes to hours, depending on the size of your database. Wait for the replication to complete before taking



any actions from a console connected to the secondary DSA server. Moreover, the replication process might get interrupted. If you experience this problem, you can discuss it with your HCL Software Support.

3. The replication server window shows you the server configuration for your current deployment. By default, your newly-installed server is configured to replicate directly from the primary server's database every 5 minutes. This time interval can be changed to a bigger value.

Authenticating Additional Servers

Multiple servers can provide a higher level of service for your BigFix installation.

If you choose to add Disaster Server Architecture (DSA) to your installation, you will be able to recover from network and systems failures automatically while continuing to provide local service. To take advantage of this function, you must have one or more additional servers with a capability at least equal to your primary server. Because of the extra expense and installation involved, you should carefully think through your needs before committing to DSA.

You must first decide how you want your servers to communicate with each other. There are three inter-server authentication options: the first two are flavors of NT and the third is SQL. Because it is more secure, NT Authentication is recommended. You cannot mix and match; all servers must use the same authorization.

Using NT Authentication with domain users and user groups

With this method, each server uses the specified domain user or a member of the specified user group to access all the other servers in the deployment.

To authenticate your servers using domain users and user groups, follow these steps:

1. Create a service account user or user group in your domain. For a user group, add authorized domain users to your servers. You might need to have domain administration privileges to do this.
2. On the Master Server, use SQL Server Management Studio to create a login for the domain service account user or user group, with a default database of **BFEnterprise**,

and give this login System Admin (sa) authority or the DBO (DataBase Owner) role on the BFEnterprise and master databases.

3. On the Master Server, change the **LogOn** settings for the FillDB, BES Root, and Web Reports services to the domain user or member of the user group created in step 2, and restart the services.



Note: After you complete the installation of the BigFix server and begin to use Product sites, you might install additional components such as the **BES Server Plugin Service** and **BES NMAP Unmanaged Asset Importer**. Both these services have their **LogOn** settings set for the NT user for Remote Database access.

Using NT Authentication with domain computer groups

With this method, each server is added to a specified domain computer group and each server accepts logins from members of that domain group.

To authenticate your servers using domain computer groups, follow these steps:

1. Create a Global Security Group in your domain containing your chosen servers. You might need to have domain administration privileges to do this.
2. After creating the group, each server must be rebooted to update its domain credentials.
3. On the Master Server, use SQL Server Management Studio to create a login for the domain group, with a default database of BFEnterprise, and give this login System Admin (sa) authority or the DBO (DataBase Owner) role on the BFEnterprise and master databases.

Using SQL Authentication

With this method, each server is given a login name and password, and is configured to accept the login names and passwords of all other servers in the deployment.

The password for this account typed in clear text is obfuscated under the HKLM branch of the registry on each server, after the restart of the FillDB service.

To authenticate your servers using SQL authentication, follow these steps:

1. Choose a single login name (for example, `besserverlogin`), and a single password to be used by all servers in your deployment for inter-server authentication.
2. On the Master server, use SQL Server Management Studio to create a SQL Server login with this name. Choose SQL Server Authentication as the authentication option and specify the password. Change the default database to `BFEnterprise` and assign the `sysadmin` server role to the new user, or map it to the role of `db_owner` on the `BFEnterprise` and master databases.
3. On the master server, add the following string values under the `HKLM\Software\Wow6432Node\BigFix\Enterprise Server\FillDB` key:

```
ReplicationUser = <login name>
ReplicationPassword = <password>
ReplicationPort = <SQL_port>
```

4. Restart the `FillDB` service.

**Note:**

This choice must be made on a deployment-wide basis; you cannot mix domain-authenticated servers with SQL-authenticated servers.

`ReplicationUser`, `ReplicationPassword`, and `ReplicationPort` must be uniquely defined in all the server registries of your DSA environment.

All BigFix servers in your deployment must be running the same version of SQL server.

Uninstalling a Windows replication server

To uninstall a replication server, call the database-stored procedure **`delete_replication_server`**, which removes the specified ID from the replication set.

Be careful not to delete the wrong server, or you might lock yourself out. The details of this procedure are beyond the scope of this guide, but basically you must log in to the database with SQL Server Management Studio. You can call the procedure with something like:

```
call dbo.delete_replication_server(n)
```

where *n* is the identifier of the server to delete.

The steps involved in completely deleting the server are beyond the scope of this guide, but the full procedure is available in [How to remove a secondary DSA server from BigFix Administration Tool](#).

Chapter 9. Installing on Linux systems

After understanding the terms and the administrative roles, you are ready to actually get authorized and install the programs.

Because BigFix is powerful, you might want to limit access to trusted, authorized personnel only. The program depends on a central repository of Fixlet actions called the **Action site**, which uses public/private key encryption to protect against spoofing and other unauthorized usage. To get started, you need authorization from HCL by getting a **License Authorization** file, which will have a name like `CompanyName.BESLicenseAuthorization`.



Note: If you run a fresh installation of BigFix V9.5.6 or later using the **License Authorization** file, be aware that limitations apply in managing Clients earlier than V9.0 and in using Relays earlier than V9.5.6. This is due to the introduction of two security enforcement services that are enabled, in this specific scenario, by default. You can change this behavior after the installation completes by changing the values assigned to `minimumSupportedClient` and `minumumSupportedRelay` as described in [BESAdmin Linux Command Line \(on page 321\)](#).

The installation program collects further information about your deployment and then creates a file called the **action site masthead**. This file establishes a chain of authority from the BigFix root all the way down to the Console operators in your organization. The masthead combines configuration information (IP addresses, ports, and so on) and license information (how many Clients are authorized and for how long) together with a public key used to verify the digital signatures.

Installing and configuring DB2

Depending on which version of DB2 you want to install, you install DB2 either before installing the BigFix server or at the same time:

- **DB2 V10.5 Enterprise Server Edition / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition:** if you want to install the Enterprise Server Edition you must install this version of DB2 before installing the BigFix server.



Note: Starting from Patch 14, the DB2 Standard Edition V11.5 GA is also supported. For more details, see [BigFix Server - Support for DB2 11.5 GA](#).



Note: Starting from Patch 17, the DB2 Standard Edition V11.5.4 / V11.5.5 / V11.5.6 / V11.5.7 / V11.5.8 / 11.5.9 are also supported.

Install it on the local workstation where you want to install the BigFix server or on a remote workstation. For information about how to install and verify DB2 server installation on Red Hat Enterprise Linux server 64-bit, see [DB2 servers and IBM data server clients](#). Before installing the BigFix server, ensure that the DB2 V10.5 Enterprise Server Edition / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition was installed and started as follows:

- If DB2 V10.5 Enterprise Server Edition / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition is installed locally:

1. Ensure that the DB2 instance is up and running and that the DB2 administrative server is started. If you configured DB2 to use the default user names, run the following commands:

```
su - db2inst1
db2start
exit
```

2. You can also verify that the DB2 instance is running by checking that the db2sysc process is active using the following command:

```
ps -ef | grep db2sysc
```

- If DB2 V10.5 Enterprise Server Edition / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 Standard Edition is installed remotely:

1. Install a DB2 V10.5 / V11.5 GA / 11.5.4 / 11.5.5 / 11.5.6 / 11.5.7 / 11.5.8 / 11.5.9 client on the workstation from where you run the BigFix server installation. The actual product you need to install is IBM Data Server Client and its product identifier is "db2client". The port of the remote DB2 database (default 50000) must be reachable by the workstation where the installation is running. No additional DB2 configurations (such as the catalog of the remote database) are required.

**Note:**

To use a remote database for BigFix, ensure you provide the following information in the installation procedure:

- a. The remote DB2 node
- b. The DB2 port number
- c. The user name of the local DB2 instance owner for the remote DB2 client and the remote DB2 server.



Important: The DB2 instance names used to install the BES Root Server cannot contain the following special characters:

blanks, tabs (`\t`), returns (`\n`) and `; & | " ' < > .`

For the DB2 password rules, see [Database requirements \(on page 64\)](#).

To install the DB2 client you can run the installation wizard or the silent installation with a response file. For additional details, see [Installation methods for IBM data server clients](#).

2. On the remote DB2, ensure that the DB2 instance is up and running and that the DB2 administrative server is started. If you configured DB2 to use the default user names, run the following commands:


```
su - db2inst1
db2start
exit
```

- **DB2 V10.5 Workgroup Server Edition:** This is the DB2 version included in the BigFix installation package. Depending on the BigFix installation package you download, you can install this version of DB2 either before installing the BigFix server by following the previous steps or together with the BigFix server installation after downloading it. You download it to the local workstation where you want to install the BigFix server. During the BigFix server installation, you must provide the following information:

DB2 Setup Location

The path where you downloaded the DB2. The default is `../wser/db2setup`.

DB2 Administrative User Password

For the DB2 password rules, see [Database requirements \(on page 64\)](#).

All the steps to configure DB2 are then performed by the BigFix server installation program.



Note: To successfully install the BigFix server on Linux systems, ensure that you unset the DB2 registry variable DB2_COMPATIBILITY_VECTOR. This variable should be set to null.

For information about database requirements, see [Installation requirements for DB2 database products](#) and [Database requirements \(on page 64\)](#).

Downloading BigFix

Download BigFix from HCL License & Delivery Portal (Flexnet).

You can download BigFix also from the support site at <http://support.bigfix.com/bes/install/downloadbes.html>.

To install the server component, download the following e-images from [HCL License & Delivery Portal](#):

Table 2. Parts required for installing BigFix Server

Software Name	Image
BigFix Platform Install V9.5 for Multiplatform Multilingual	<code>BigFix_Platform_Install_V95.zip</code>
BigFix Platform Install V9.5 for Linux and DB2 Multilingual	<code>BigFix_Platform_Install_V95_Lnx_DB2.tar</code>

To extract the BigFix Linux Server installation files, perform the following steps:

1. Copy the BigFix Server compressed zip file `BigFix_Platform_Install_V95.zip` on your Linux Server.
2. Expand the compressed zip file using the following command:

```
unzip "BigFix_Platform_Install_V95.zip"
```

3. From the `linux_server` folder, expand the `ServerInstaller_9.5.xxx-rhe6.x86_64.tgz` file on your Red Hat Enterprise Linux Server by using the following command:

```
tar -zxvf ServerInstaller_9.5.xxx-rhe6.x86_64.tgz
```

You can find the `install.sh` file to install the Linux Server in the `ServerInstaller_9.5.xxx-rhe6.x86_64` folder.

To extract the BigFix Linux Server installation files together with DB2, perform the following steps:

1. Copy the tar file `BigFix_Platform_Install_V95_Lnx_DB2.tar` on your Linux Server.
2. Expand the compressed file using the following command:

```
tar -zxvf BigFix_Platform_Install_V95_Lnx_DB2.tar
```

- When you expand the `BigFix_Platform_Install_V95_Lnx_DB2.tar` image, you have the DB2 image, `v10.5fp3_linuxx64_server_r.tar.gz` in the `BigFix-9.5.xxx-Linux-DB2` folder, on your computer. To install the Linux server and the DB2 server, run the `install.sh` command from the `ServerInstaller_9.5.xxx-rhe6.x86_64` folder.



Note: Do not expand the `v10.5fp3_linuxx64_server_r.tar.gz` file, because the `install.sh` command searches for the DB2 archive `*.gz`.

Performing an evaluation installation on Linux

To install a BigFix server with an evaluation license on Linux, perform the following steps:

- On the computer where you want to install the BigFix server, from the shell where you extract the contents of the `.tgz` server installer, enter the following command:

```
./install.sh
```

- To install the Evaluation version, enter `1`:

```
Select the type of installation
[1]  Evaluation: Request a free evaluation license from HCL.
This license allows you to install a fully functional copy of the
    BigFix on up to 1000 clients,
for a period of 30 days.
[2]  Production: Install using a production license or an
    authorization for a production license.
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

- After reading the License Agreement, enter `1` to accept it and continue.
- Enter your First Name, Last Name, Email address and Organization's Name to create the digital signature.
- Enter the name with which your server is registered to the DNS. It will be used by the BigFix clients to identify the BigFix server. It cannot be changed after a license is created.

6. Enter the server identification port to use for all communication by the BigFix components or press <Enter> to accept the default value which is 52311.
7. Enter the Web Reports server HTTPS port number or press <Enter> to accept the default value which is 8083.
8. Enter the WebUI HTTPS port number or press <Enter> to accept the default value which is 443.
9. Enter the WebUI HTTP redirect port number or press <Enter> to accept the default value which is 80.
10. To configure the firewall, enter 1:

```
The firewall of the operating system is active on the local server.
To enable the communication using the specified ports you can:
[1]  Configure the firewall now
[2]  Configure the firewall later
Choose one of the options above or press <Enter> to accept the default
value: [2]
```

11. With DB2 already installed

- Enter the name of the local DB2 instance that you want to use or press <Enter> to accept the default value which is `db2inst1`
- Enter the user name of the local DB2 instance owner that you want to use or press <Enter> to accept the default value which is `db2inst1`

Without DB2 already installed

- To install DB2, press <Enter> to accept the default value which is `1`:

```
The installer does not detect if DB2 is installed on the system.
Specify which option corresponds to your installation:
[1]  DB2 is not installed, install it.
[2]  DB2 is installed, use the installed instance.
[3]  Exit from the installation.
Choose one of the options above or press <Enter> to accept the
default value: [1]
```

DB2 is installed with the following default settings:

```

DB2 instance owner: db2inst1
DB2 fenced user: db2fenc1
DB2 administration server user: dasusr1
DB2 communication port: 50000
DB2 installation directory: /opt/ibm/db2/V10.5

```

- If you want to use different values for these settings, specify them in the installation response file or CLI options. Otherwise, press <Enter> to accept the default value:

```
[1] Proceed to install DB2.
```

- If one or more DB2 prerequisite packages were not installed, you can ignore the warning messages and proceed with the installation (not recommended) or install the missing packages using the YUM repository, if configured (recommended)
- Enter the location of the DB2 setup file or press <Enter> to accept the default value which is `../server/db2setup`

12. Enter the password of the DB2 administrative user. This password will also be used to log in to the BigFix database and to digitally sign all actions taken from the BigFix console.

13. Choose the key size that you want to use or press <Enter> to accept the default value which is 2:

```

Key size level
Provide the key size that you want to use:
[1] 'Min' level (2048 bits)
[2] 'Max' level (4096 bits)
Choose one of the options above or press <Enter> to accept the default
value: [2]

```

14. Choose a folder for your private key (`license.pvk`), the license certificate (`license.crt`), and the site masthead (`masthead.afxm`) or press <Enter> to accept the default value which is `./license`.

15. Choose if you want to use the proxy to access the internet or press <Enter> to accept the default value which is 2:

```
Proxy usage
[1] Use the proxy to access the internet
[2] Do not use the proxy
Choose one of the options above or press <Enter> to accept the default
value: [2]
```

16. Choose the value of the encoding that will be used for the content (FXF Encoding) or press <Enter> to accept the default value which is:

```
[8] Western European languages ( Latin 1 ) - [1252]
```

17. Specify the DB2 port number or press <Enter> to accept the default value which is 50000.

After performing these steps, the evaluation license was generated successfully. If you chose to generate a response file named `response.txt`, verify its content after the installation.

Installation Command Options

You can run the Production or Evaluation installation in interactive or silent mode.

The full command to run any type of installation is the following:

```
./install.sh [ -f <input_response_file> ] [ -g <output_response_file> ]
[ -upgrade ]
[ -reuseDb ] [ -opt <key_name1>=<key_value1> ] [ -opt
<key_name2>=<key_value2> ] ...
```

where:

-f <input_response_file>

Specifies the full path and file name of the response file to use.

-g <output_response_file>

Generates a response file.

-upgrade

Runs the script to upgrade all the components.

-reuseDb

Allows you to use an existing database. If during the disaster recovery the installation program finds `BFENT` or `BESREPOR` databases, it uses them.

-opt <key_name>=<key_value>

Allows you to override at runtime a value assigned to a key in the response file.

Installing the components

Installing the Server

Before running the installation, to ensure you have all the prerequisites, see [Server requirements \(on page 59\)](#).



Note: The installation program installs all prerequisites using Yum. For information about how to configure Yum and Yum repositories see [Configuring Yum and Yum Repositories](#).

To install the BigFix Server in your production environment, perform the following steps:

1. From the shell where you extract the server package, move to the installation directory, `ServerInstaller_9.5.xxx-rhe6.x86_64` and enter the following command:

```
./install.sh
```

If you want to generate a response file for future unattended installations, add the `-g` option followed by the path where to store the response file, as follows:

```
./install.sh -g response.txt
```

2. To install the Production, enter 2:

```
Select the type of installation
[1]  Evaluation: Request a free evaluation license from HCL.
This license allows you to install a fully functional copy of the
    BigFix on up to 1000 clients,
for a period of 30 days.
[2]  Production: Install using a production license or an
    authorization for a production license.
Choose one of the options above or press <Enter> to accept the default
value: [1]
```



Note: If you enter 1 to run the evaluation installation, consider that this type of installation does not support the enhanced security option. For more information about this feature, see Security Configuration Scenarios.

3. After reading the License Agreement, enter 1 to accept it and continue.

4. Select 1 if you want to install all the components:

```
Select the BigFix features that you want to install:
[1]  All components (server, client, Web Reports and WebUI)
[2]  Server and client only
[3]  Web Reports only
[4]  WebUI and client only
[5]  Server, WebUI and client only
[6]  Web Reports, WebUI and client only
[7]  Server, Web Reports and client only
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

5. Enter 1 to create a single database or a Master database for later replication. Enter 2 if you want to create a replica of an existing master database. For additional information, see .


```

Select the database replication:
[1] Single or master database
[2] Replicated database
Choose one of the options above or press <Enter> to accept the
default value: [1]

```

6. To use a local database, enter 1:

```

Select the database:
[1] Use a local database
[2] Use a remote database
Choose one of the options above or press <Enter> to accept the
default value: [1]

```

The local database name of BigFix server is `BFENT`. The local database name of Web Reports is `BESREPOR`.



Note: To use a remote DB2 client node for BigFix, see [Installing and configuring DB2 \(on page 157\)](#).

7. Enter the location where the downloaded files for the Clients are stored:

```

Choose the server's root folder:
Specify the location for the server's root folder or
press <Enter> to accept the default value: /var/opt/BESServer

```

8. Enter the location where Web Reports stores its files:

```

Choose the Web Reports server's root folder:
Specify the location for the Web Reports server's root folder or
press <Enter> to accept the default
value: /var/opt/BESWebReportsServer

```

9. Enter the Web Reports HTTPS port number:

Choose the Web Reports server's port number:

Specify the port number or press <Enter> to accept the default value:

8083

If you are installing BigFix Version 9.5, the default value is 8083. If you are upgrading to BigFix Version 9.5, the default value is 80.

10. Enter the WebUI HTTPS port number:

Specify the port number or press <Enter> to accept the default value:

443

11. Enter the WebUI HTTP redirect port number:

Specify the port number or press <Enter> to accept the default value:

80

12. Specify the name of the local DB2 instance used by BigFix, or accept the default name:

Local DB2 instance name

The DB2 instance used by the BigFix requires specific configuration for performance optimization.

It is therefore suggested that you use a dedicated DB2 instance.

Specify the name of the local DB2 instance that you want to use or press <Enter>

to accept the default value: db2inst1



Note: The DB2 instance to be used is always the instance local to the system where you are installing the server. If you are performing an installation with a remote database, you must use the DB2 instance specified on the DB2 client and not the one specified on the remote DB2 server.

13. Enter the user name for the DB2 local administrative user. The default is `db2inst1`.

DB2 local administrative user

Specify the user name of the local DB2 instance owner that you want to use or press <Enter>

to accept the default value: db2inst1

14. Enter the DB2 local administrative user password.

DB2 local administrative user password:

Specify the password of the local DB2 administrative user:

15. Enter 1 to apply an optimized configuration to the DB2 instance or 2 to skip the configuration.

DB2 instance configuration

The specified DB2 instance can be configured to optimize the BigFix performance.

Be aware that the configuration settings will be applied to all databases that belong to the selected DB2 instance.

[1] Configure the specified DB2 instance.

[2] Skip the DB2 instance configuration.

Choose one of the options above or press <Enter> to accept the default value: [1]

16. Enter the name of the BigFix administrative user.

Create the initial administrative user:

Specify the Username for the new user or press <Enter> to accept the default value: IEMAdmin

17. Enter the password of the BigFix administrative user.

Create the initial administrative user:

Specify the password for the new user:

18. If the local firewall is running, the installation program allows you to configure it automatically.

Firewall configuration

The firewall of the operating system is active on the local server.

To enable the communication using the specified ports you can:

- [1] Configure the firewall now
- [2] Configure the firewall later

Choose one of the options above or press <Enter> to accept the default value: [2]



Note: If you run the installation on a RHEL 7 system, you might be using **firewalld** instead of **iptables** for managing the firewall. In this case you have to configure the firewall rules manually as a post-installation step.

19. To run the installation using a BES license authorization file, enter 1.

Choose the setup type that best suits your needs:

- [1] I want to install with a BES license authorization file
- [2] I want to install with a production license that I already have
- [3] I want to install with an existing masthead

Choose one of the options above or press <Enter> to accept the default value: [1]



Note: If you already ran a first installation, or part of it, you can specify option 2 or 3, to install with an existing production license (`license.crt`, `license.pvk`) or an existing masthead (`masthead.afxm`).

20. Specify if you want to connect to the internet through a proxy.

Proxy usage

- [1] Use the proxy to access the internet
- [2] Do not use the proxy

Choose one of the options above or press <Enter> to accept the default value: [2]



Note: If you chose to use a proxy, before moving to the next step, perform the steps described in [Configuring the proxy \(on page 179\)](#).

21. If you chose to install with a BES license authorization file, specify its location:

```
License Authorization Location
Enter the location of the license authorization file that you
received
from HCL or press <Enter> to accept the default:
./license/LicenseAuthorization.BESLicenseAuthorization
```

22. Specify the DNS name or IP address of the computer where you are installing the server. This name is saved in your license and will be used by clients to identify the BigFix server. It cannot be changed after a license is created.

```
This name is recorded into your license and will be used by Clients to
identify the HCL BigFix Server.
It cannot be changed after a license is created. Enter the DNS name of
your HCL BigFix server or press <Enter>
to accept the default value: 'HOSTNAME'
```

23. If you chose to install with a BES license authorization file, specify the password to be used to encrypt the Site Admin Private Key file that will be generated.

```
Site admin private key password:
Specify the related site admin private key password:
```

24. Specify the size in bits of the key to be used to encrypt the HTTPS traffic.

```
Key Size Level
Provide the key size that you want to use:
[1] 'Min' Level (2048 bits)
[2] 'Max' Level (4096 bits)
Choose one of the options above or press <Enter> to accept the
default: [2]
```

25. Choose the folder where the installation will save the generated files: `license.crt`, `license.pvk` and `masthead.afxm`.

```
Choose License Folder:
Specify a folder for your private key (license.pvk), license
certificate
(license.crt), and site masthead (masthead.afxm) or press <Enter> to
accept
the default: ./license
```

26. Decide how to send your activation request to HCL. If your computer is connected to the Internet, you can submit it now by entering `1`.

```
Request license
Your request is now ready for submission to HCL.
[1] Submit the request from this machine over the Internet. The
request is redeemed for a license certificate
(license.crt) and then saved in your credential folder.
[2] Save request to a file and send it to HCL at the URL:
'http://support.bigfix.com/bes/forms/BESLicenseRequestHandler.html'.
This method might be necessary if your deployment is isolated from the
public Internet.
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

If you choose `1`, move to the next installation step.

If you choose `2`, see [Submitting the license request \(on page 176\)](#).

27. If you chose to install with a production license that you already had, specify the following:
- The location of the license certificate file.
 - The location of the Site Admin Private Key file.
 - The Site Admin Private Key password.
28. Specify the encoding used to store the content:

Specify the value of the encoding that will be used for the content
(FXF Encoding)

[1]	Thai	- [874]
[2]	Japanese	- [932]
[3]	Chinese (simplified)	- [936]
[4]	Korean	- [949]
[5]	Chinese (traditional)	- [950]
[6]	Central European languages (Latin 2)	- [1250]
[7]	Cyrillic	- [1251]
[8]	Western European languages (Latin 1)	- [1252]
[9]	Greek	- [1253]
[10]	Turkish	- [1254]
[11]	Hebrew	- [1255]
[12]	Arabic	- [1256]
[13]	Baltic	- [1257]
[14]	Vietnamese	- [1258]
- Choose one of the options above or press <Enter> to accept the default value: [8]

29. Choose 1 to accept the default masthead values or 2 to customize them:

Advanced masthead parameters

The masthead will be created using the following defaults:

Server port number: 52311

Use of FIPS 140-2 compliant cryptography: Disabled

Gather interval: One Day

Initial action lock: Unlocked

Action lock controller: Console

Action lock exemptions: Disabled

Unicode filenames in archives: Enabled

The above default values are suitable for most of BigFix deployments.

- [1] Use default values
- [2] Use custom values

```
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

If you decide to use custom values, see [Customizing the masthead parameters \(on page 182\)](#).

30. **Case 1:** If you chose to install using a BES license authorization file, the following messages confirm that your license request was successfully processed:

```
Info: The license authorization file was successfully processed.
Info: The license authorization file can be used only once.
It was renamed
  to ./license/LicenseAuthorization.BESLicenseAuthorization.used_201808
01
to indicate that it has already been used.
Info: If you want to run the installation again, start from the
just-generated
./license/license.crt and ./license/license.pvk
```

Case 2 If you chose to install with a production license that you already had, specify the folder where the license files will be saved.

```
Choose the license folder:
Specify a folder for your site masthead (masthead.afxm) or press
<Enter> to accept the default value:
./license
```

Case 3 If you chose to install with an existing masthead file, specify the following:

- a. The location of the Site Admin Private Key file.
- b. The Site Admin Private Key password.
- c. The location of the deployment masthead file.

31. Specify whether the Web Reports service will be run by the root user or not.

```
Use root user for Web Reports
If you specify true, Web Reports service will run with root
privileges.
```



```
[1]  True
[2]  False
Choose one of the options above or press <Enter> to accept the default
value: [2]
```

32. If you chose to run the Web Reports service with a user different from root, specify the name of an existing user.

```
Web Reports non-root user name
Specify the name of the non-root user for Web Reports (the user must
already exists).
```

33. Enter the port number for the DB2 connection to create the DB2 instance:

```
DB2 Connection:
Specify the DB2 Port Number or press <Enter> to accept the default:
50000
```

The BigFix Server installation is now complete. You can now install the BigFix Console on a Windows™ system and log in with the account you created during the installation of the server. The default BigFix administrative user is `IEMAdmin`.

You can find the installation log `BESinstall.log` and the `BESAdmin` command line traces `BESAdminDebugOut.txt` in the `/var/log` folder.

Submitting the license request

How to submit a license request.

To install a production copy of BigFix, you must first purchase a license from HCL.

During the installation you can choose different types of setup depending on the license input file you have:

```
I want to install with a BES license authorization file
  I want to install with a Production license that I already have
  I want to install with an existing masthead
```

BES license authorization file

After you purchase a license from HCL you receive a BigFix license authorization file. You must use this file the first time you run a production installation.

The sales agent will want to know how many clients you intend to install. Based on this, the agent creates, signs, and emails you a **License Authorization** file, which will have a name like `CompanyName.BESLicenseAuthorization`.

If you run this installation and do not have access to the Internet, a temporary request (`beslicense.request`) is generated to request a production license (`license.crt`) from the BigFix License Server and a `license.pvk` private key file. You can leave the installation in pending status until you receive the production license.

Copy the request named `request.BESLicenseRequest` on to a machine with access to Internet, visit the BigFix website, post your request, and download your certificate. After you downloaded the certificate, copy it to the machine on which you are installing the server and continue the installation. If you exited the installation, to install the server you must run the installation using the option that requires an existing **Production license** file.



Note: The DNS/IP address that you choose becomes a permanent part of your deployment and must never change. For flexibility, it is strongly recommended that you use a DNS name instead of a static IP address.

The installation program collects further information about your deployment and then creates the digital signature key `license.pvk` and a file called the action site masthead. This file combines configuration information (IP addresses, ports, and so on.) and license information (how many Clients are authorized and for how long) together with a public key that is used to verify the digital signatures.

Production license

Use this option if you have already the production license `license.crt` and the private key file on the machine on which you are installing the server, but did not complete the server installation.

An existing masthead

Use this type of installation to reinstall the BigFix server or a DSA server. The input file needed to run this installation is the action site masthead file that was generated during the first installation. The action site masthead has the extension `.afxm` and acts as a configuration file with parameters such as the BigFix server IP address or server name, port number, and locking behavior. It contains information necessary for the digital signature security scheme that BigFix uses (the masthead contains the public key information), and the licensing information that allows BigFix users to run BigFix with a specified number of users for a specified length of time. The BigFix Server installer requires the masthead file be in the server installation folder.

Decide how to send your activation request to HCL. If your computer is not connected to the Internet or cannot reach the HCL license servers, you must select option 2. If you chose 2, a request file named `request.BESLicenseRequest` is generated.

To submit the request file to HCL, use the following Web site: <http://support.bigfix.com/bes/forms/BESLicenseRequestHandler.html>

You can, then, continue the installation by importing the certificate file that you received (`license.crt`) or exit from the installation and rerun it at a later time.

Import License Certificate

- [1] Continue with the installation importing the certificate (`license.crt`).
- [2] Exit from the installation, I will import the certificate at a later time.

If you exit the installation, you can rerun `./install.sh` later and repeat all the steps specifying that you want to use the generated license with option 2:

Choose the setup type that best suits your needs:

- [1] I want to install with a BES license authorization file
- [2] I want to install with a Production license that I already have
- [3] I want to install with an existing masthead

From this point on, you can proceed with the normal installation procedure.

Configuring the proxy

This procedure explains how to set up a proxy connection when installing the BigFix server.

If you need to set up a proxy connection after the server installation, see [Setting a proxy connection on the server \(on page 427\)](#).

1. Specify if you want to connect to the internet through a proxy.

Proxy usage

- [1] Use the proxy to access the internet
- [2] Do not use the proxy

Choose one of the options above or press <Enter> to accept the default value: [2]

2. Enter the proxy hostname or IP address.

Proxy hostname

Specify the hostname or the IP address of the Server that acts as a proxy:

3. Specify, if required, the port number of your proxy.

Proxy port

Specify the port of the proxy or press <Enter> if this parameter is not required:

4. You can accept the default proxy settings or, alternatively, you can assign different values.

Advanced proxy parameters

The proxy will be configured using the following defaults:

Proxy user: none

Proxy password: none

Proxy tunneling capability: let proxy decide

Authentication method: all methods allowed by the proxy

Proxy exception list: localhost,127.0.0.1

Use the proxy for downstream notification: false

[1] Use the default values

[2] Set advanced proxy parameters

Choose one of the options above or press <Enter> to accept the default value: [1]

**Note:**

- If you want to enable FIPS mode, ensure that the proxy configuration is set up to use an authentication method other than `digest`, `negotiate` or `ntlm`.
- If you specify to use the `negotiate` authentication method on a server or relay, different authentication methods might be used.
- The proxy configuration specified at installation time is saved in the server configuration file `BESServer.config` and it is used also at runtime.

5. Specify the user name used to connect to the proxy, if required, or leave it empty. If you specify a user name, you will also be prompted to enter its password.

Proxy user

Specify the proxy username or press <Enter> if no user is required:

6. Specify the authentication method to be used for your proxy.

Proxy authentication method

The proxy authentication method can be one of the values listed below or a combination of them separated

by a comma.

Warning: If you want to enable FIPS compliant cryptography consider that digest, ntlm, and negotiate are not compatible with FIPS.

basic

digest

ntlm

negotiate

Specify the proxy authentication method or press <Enter> if all methods allowed by the proxy can be used :

7. Specify, if required, a proxy exception list.

Proxy exception list

Note: If the exception list field is kept empty, the communication to "localhost" and "127.0.0.1" will not pass through the proxy by default. If you specify something in the exception list field, ensure that you add also these two values, otherwise the proxy will be used to reach them.

Specify the exception list using comma (,) to separate entries or press <Enter> to keep it empty:

8. Specify if you want to enforce the proxy tunneling capability.

Proxy tunneling capability

Choose one of the following options:

[1] Enforce proxy tunneling

[2] Let proxy decide

Choose one of the options above or press <Enter> to accept the default value: [2]

9. Specify if you want to use the proxy also for downstream notifications.

```

Enable the use of the proxy for downstream notification.
If you specify true, the proxy is used by the BES server also for
communicating with the relay.

[1]  True
[2]  False

Choose one of the options above or press <Enter> to accept the default
value: [2]

```

10. Optionally, you can test if the connection to the proxy can be successfully established.

```

Test the connection using the proxy
If you want to enable FIPS 140-2 compliant cryptography, select "Test
the connection using FIPS".
Warning: There are some proxy authentication methods that are not
compatible with FIPS.

[1]  Test the connection
[2]  Test the connection using FIPS
[3]  Do not test the connection

Choose one of the options above or press <Enter> to accept the default
value: [1]

```

Customizing the masthead parameters

At the following installation step, choose 2 to customize the masthead parameters.

```

Advanced masthead parameters

The masthead will be created using the following defaults:

Server port number: 52311
Use of FIPS 140-2 compliant cryptography: Disabled
Gather interval: One Day
Initial action lock: Unlocked
Action lock controller: Console
Action lock exemptions: Disabled
Unicode filenames in archives: Enabled

```

```
The above default values are suitable for most of BigFix deployments.
[1] Use default values
[2] Use custom values
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

You can change the following masthead parameters:

Server port number

Specify the number of the server port. The default value is: 52311.

```
Server port number
Specify the server port or press <Enter> to accept the default:
52311
```



Note: Do not use port number 52314 for the network communication between the BigFix components because it is reserved for proxy agents.

Enable use of FIPS 140-2 compliant cryptography

Use this setting to specify whether or not to be compliant with the Federal Information Processing Standard in your network. Enter 1 to enable it, 2 to disable it. The default value is 2.

```
Enable the use of FIPS 140-2 compliant cryptography
[1] Use of FIPS enabled
[2] Use of FIPS disabled
Choose one of the options above or press <Enter> to accept the d
efault value: [2]
```



Note: Enabling FIPS mode prevents the use of some authentication methods when connecting to a proxy. If you chose to use a proxy to access the Internet or to communicate with subcomponents,



ensure that you selected an authentication method other than `digest`, `negotiate` or `ntlm`.

Gathering interval

This option determines how long the clients wait without hearing from the server before checking whether new content is available. The default waiting time is one day (option 6).

```
Gathering interval
Specify the time interval that you want to use. The default value
is suitable for most of the BigFix deployments.
[1] Fifteen minutes
[2] Half an hour
[3] One hour
[4] Eight hours
[5] Half day
[6] One day
[7] Two days
[8] One week
[9] Two weeks
[10] One month
[11] Two months
Choose one of the options above or press <Enter> to accept the d
efault value: [6]
```

Initial action lock

You can specify the initial lock state of all clients, if you want to lock a client automatically after installation. Locked clients report which Fixlet messages are relevant for them, but do not apply any actions. The default is to leave them unlocked (option 3) and to lock specific clients later on, as required.

```
Initial action lock
[1] Locked
```

```
[2] Lock duration
[3] Unlocked
Choose one of the options above or press <Enter> to accept the default value: [3]
```

Action lock controller

This parameter determines who can change the action lock state. By default, it is the Console (option 1).

```
Action lock controller
[1] Console
[2] Client
[3] Nobody
Choose one of the options above or press <Enter> to accept the default value: [1]
```

Enable lock exemptions

In rare cases, you might need to exempt a specific URL from any locking actions. This setting allows you to enable or disable this function. The default choice is to leave it disabled (option 2).

```
Enable lock exemptions
[1] Lock exemption enabled (fairly unusual)
[2] Lock exemption disabled
Choose one of the options above or press <Enter> to accept the default value: [2]
```

Enable the use of Unicode file names in archives

This setting specifies the codepage used to write file names in the BigFix archives. The default choice is to use Unicode (option 1).

```
Enable the use of Unicode filenames in archives
[1] The use of Unicode filenames in archives is enabled.
[2] The use of Unicode filenames in archives is disabled.
```

```
Choose one of the options above or press <Enter> to accept the default value: [1]
```

After this step, the `masthead.afxm` file is created with the specified parameters.

Installing Web Reports Standalone

If you run a fresh install of Web Reports V9.5.2 or later, the HTTPS configuration is automatically enabled on port 8083.

After the installation completes successfully, you can switch to the HTTP configuration by changing the value of the `_WebReports_HTTPServer_UseSSLFlag` setting to 0. For more information, see [Customizing HTTPS on Web Reports](#).

To install the BigFix Web Reports in your production environment, perform the following steps:

1. From the shell where you extract the server package, move to the installation directory, `ServerInstaller_9.5.xxx-rhe6.x86_64` and enter the following command:

```
./install.sh
```

2. Install the Production type by entering 2, because the Evaluation type does not allow to install the components separately:

```
Select the type of installation
[1]  Evaluation: Request a free evaluation license from HCL Corp.
This license allows you to install a fully functional copy of the
Endpoint Manager on up to 30 clients, for a period of 30 days.
[2]  Production: Install using a production license or an
      authorization
      for a production license.
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

3. After reading the License Agreement, enter 1 to accept it and continue.



Note: If you have already installed the BigFix server, the License Agreement is not displayed.

4. Select 3 if you want to install the Web Reports component only:

```
Select the BigFix features that you want to install:
[1] All components (server, client, Web Reports and WebUI)
[2] Server and client only
[3] Web Reports only
[4] WebUI and client only
[5] Server, WebUI and client only
[6] Web Reports, WebUI and client only
[7] Server, Web Reports and client only
Choose one of the options above or press <Enter> to accept the default
value: [1]
```

5. To use a local database, enter 1:

```
Select the database:
[1] Use a local database
[2] Use a remote database
Choose one of the options above or press <Enter> to accept the
default: [1]
```

The local database name is BESREPOR.



Note:

To use a remote database for BigFix Web Reports, you must perform the following steps:

- a. Install the Web Reports DB2® server on the remote workstation.
- b. Install a DB2® client on the workstation from where you run the BigFix Server installation
- c. Connect the DB2® server to the DB2® client installed on the workstation from where you run the installation, that is, the port of the



DB2® database (default 50000) must be reachable by the workstation where the installation is running.

- d. Provide the following information in the installation procedure:
 - i. The remote DB2 node
 - ii. The DB2 port number
 - iii. The user name of the local DB2 instance owner for the remote DB2 client and the remote DB2 server.



Important: Before entering the user names of the DB2 instance owners ensure that the related DB2 instances are up and running. The DB2 instance names used to install the BES Root Server cannot contain the following special characters: blanks, tabs `\t`, returns `\n` and `;` `&` `|` `"` `'` `<` `>`

6. Enter the location where the Web Reports server stores its files:

Choose the WebReports server's root folder:
Specify the location for the WebReports server's root folder or press `<Enter>` to accept the default: `/var/opt/BESWebReportsServer`

7. Enter the Web Reports server port number:

- If you are installing BigFix Version 9.5.2, the default value is 8083 and the HTTPS configuration is automatically enabled:

Choose the WebReports server's port number:
Specify the port number or press `<Enter>` to accept the default:
`8083`

- If you are installing BigFix Version 9.5, the default value is 8080:

Choose the WebReports server's port number:
Specify the port number or press `<Enter>` to accept the default:
`8080`

8. If you are installing BigFix V9.5 or later, you can specify a name of the DB2 instance used by BigFix different from the name of the DB2 user.

DB2 instance name

The DB2 instance used by the BigFix requires specific configuration for performance optimization. It is therefore suggested that you use a dedicated DB2 instance.

Specify the name of the DB2 instance that you want to use or press <Enter>

to accept the default value: db2inst1

9. Enter the user name for the DB2® Local Administrative user. The default is db2inst1.

DB2 local administrative user

Specify the user name of the local DB2 instance owner that you want to use

or press <Enter> to accept the default value: db2inst1

10. Enter the DB2® Local Administrative user password.

DB2 local administrative user password:

Specify the password of the local DB2 administrative user:

Enter the password again for verification:

11. Enter 1 to configure the specified DB2 instance.

DB2 instance configuration

The specified DB2 instance can be configured to optimize the BigFix performance.

Be aware that the configuration settings will be applied to all databases that belong to the selected DB2 instance.

[1] Configure the specified DB2 instance.

[2] Skip the DB2 instance configuration.

Choose one of the options above or press <Enter> to accept the default value: [1]

12. If the local firewall is running, enter 2 to perform the configuration later:.

Firewall configuration

The firewall of the operating system is active on the local server.

To enable the communication using the specified ports you can:

- [1] Configure the firewall now
- [2] Configure the firewall later

Choose one of the options above or press <Enter> to accept the default value: [2]

13. Specify the masthead file (default is `/etc/opt/BESSEServer/actionsite.afxm`):

Deployment masthead

Specify the masthead file (`masthead.afxm` or `actionsite.afxm`) for your deployment

or press <Enter> to accept the default

value: `/etc/opt/BESSEServer/actionsite.afxm`

14. Specify the DNS name or IP address of the machine on which to install Web Reports.

This name is saved in your license and will be used by clients to identify the BigFix server. It cannot be changed after a license is created.

WebReports server DNS name

Enter the DNS name of your BigFix WebReports server

or press <Enter> to accept the default: 'hostname'

15. Starting from V9.5.3, you can specify the user name you want to use to install the Web Reports component. You can choose either the root user, as in versions earlier than V9.5.3, or another existing user.

Use root user for WebReports

If you specify true, WebReports service will run with root privileges.

- [1] True
- [2] False

Choose one of the options above or press <Enter> to accept the default value: [2]

If you choose option 2, you can specify a non-root user. This user does not need to have any particular rights or to belong to a group with particular rights to be used as a Web Reports installation user:

```
WebReports non-root user name
Specify the name of the non-root user for WebReports (the user must
already exists).
```



Note: If you are upgrading from an earlier version, the Web Reports service user remains the same as before the upgrade.

16. Enter the port number for the DB2 connection to create the DB2 instance:

```
#####
DB2 Connection:
Specify the DB2 Port Number or press <Enter> to accept the default:
50000
```

The installation runs:

```
Info: Creating the database for the WebReports Component, please wait ...
Info: The database for the WebReports component was created successfully.
Info: The rpm './repos/BESWebReportsServer-9.5.94-rhel.x86_64.rpm' was
installed
successfully.
Info: Configuring the database for the WebReports component, please
wait ...
Info: The database for the WebReports component was configured
successfully.
Info: A WebReports administrator was created successfully.
Info: The service 'BESWebReportsServer' started successfully.
The installation of 'BigFix' completed successfully.
```

The BigFix Web Reports installation is now complete.

You can see installation errors in the `BESinstall.log` and the `BESAdmin` command line traces in the `BESAdminDebugOut.txt` files under the `/var/log` directory.

Installing the WebUI Standalone

This procedure can be run starting from BigFix Version 9.5.11.



Note: You can install the WebUI component on Red Hat Linux 8 (64-bit).

Install the WebUI on just one computer per deployment. If you want to add the WebUI to a computer where the BigFix client is already installed, you can only do it by running the Fixlet named **Install HCL BigFix WebUI Service**. The BigFix server installer can be used to install the WebUI only if the target machine has no BigFix client. If you want to use it to install the WebUI on a remote computer, you must first generate the WebUI authentication certificates for that computer. Log in to the computer where you installed the BigFix server and run the `BESAdmin.sh -createwebuicredentials` command. For more details about the command, see [BESAdmin Linux Command Line \(on page 321\)](#). Copy the generated certificates folder to the remote computer before running the installer on it. The WebUI must connect to the same DB2 instance used by the BigFix server, so ensure that this connection is possible from the remote computer.

To install the BigFix WebUI in your production environment, perform the following steps:

1. From the shell where you extract the server package, move to the installation directory, `ServerInstaller_9.5.xxx-rhe6.x86_64` and enter the following command:

```
./install.sh
```

2. Install the Production type by entering 2, because the Evaluation type does not allow to install the components separately:

```
Select the type of installation
[1]  Evaluation: Request a free evaluation license from HCL.
[2]  Production: Install using a production license or an
      authorization
```

for a production license.

Choose one of the options above or press <Enter> to accept the default value: [1]

3. After reading the License Agreement, enter 1 to accept it and continue.

4. Select 4 if you want to install the WebUI component only:

Select the HCL BigFix features that you want to install:

[1] All components (server, client, Web Reports and WebUI)

[2] Server and client only

[3] Web Reports only

[4] WebUI and client only

[5] Server, WebUI and client only

[6] Web Reports, WebUI and client only

[7] Server, Web Reports and client only

Choose one of the options above or press <Enter> to accept the default value: [1]

5. Enter the WebUI HTTPS port number:

WebUI's port number

Specify the port number or press <Enter> to accept the default value:

443

6. Enter the WebUI HTTP redirect port number::

WebUI's redirect port number

Specify the port number or press <Enter> to accept the default value:

80

7. Specify from which folder the WebUI credentials must be taken:

Choose the folder to pick the WebUI credentials from

The WebUI needs a set of certificates as credentials to authenticate itself to the HCL BigFix server. These certificates must be generated on the server

by running the BESAdmin command `--createwebuicredentials` and the folder containing them must be copied to this computer.
Specify the folder containing the WebUI credentials or press <Enter> to accept the default value: `./cert_webui`

8. Specify the masthead file for your deployment:

Deployment masthead
Specify the masthead file (`masthead.afxm` or `actionsite.afxm`) for your deployment or press <Enter> to accept the default value:
`/etc/opt/BESServer/actionsite.afxm`

9. Specify the DNS name of the machine on which to install the WebUI:

WebUI DNS name
This name is used by the server to identify the WebUI. Enter the DNS name of the WebUI or press <Enter> to accept the default value:
`hostname`

10. Enter the remote DB2 node:

DB2 remote hostname
Specify the hostname of the remote DB2 system:
`hostname`

11. Enter the remote DB2 port number:

DB2 remote port
Specify the remote DB2 port number or press <Enter> to accept the default value: `50000`

12. Enter the DB2 remote administrative user:

DB2 remote administrative user
Specify the username for the remote DB2 administrative user or press <Enter> to accept the default value: `db2inst1`

13. Enter the DB2 remote administrative user password:

```
DB2 remote administrative user password
Specify the password of the remote DB2 administrative user:
password
Enter the password again for verification:
password
```

Verifying Server Installation

To verify that an installation has completed successfully, perform the following steps:

1. Ensure that the following message is displayed to the standard output or in the installation log file `/var/log/BESInstall.log`:

```
The installation of BigFix was completed successfully.
You can now proceed to install the BigFix Console on a Windows System
and log
on as 'EvaluationUser', the user just created.
The BigFix Console installer is available in the folder
'/var/opt/BESInstallers
```

2. Ensure that the services associated with each installed components are up and running by entering the following commands from `/etc/init.d`:

```
./besserver status
./besfilldb status
./besgatherdb status
./besclient status
./beswebreports status
```

3. Ensure that local or remote databases are created by switching to the local DB2 Administrative user (default: `db2inst1`) and running the list database command:

```
su - db2inst1
db2 list db directory
```

Check that the following databases are created:

- Server component: `BFENT`
 - Web Reports component: `BESREP0R`
4. Launch the BigFix Console and provide the credentials of the first BigFix user created at installation time to ensure that the Console connects to the Server. The user default value for the evaluation installation is `EvaluationUser`. Ensure that the client installed by default on the server machine is registered.
 5. Ensure that you can log on to the Web Reports from the Console by selecting **Tools** -> **Launch WebReports** and providing the credentials of the first user created at installation time.

Silent installation

To run a silent installation enter the following command:

```
./install.sh -f response_file -opt keyword=value
```

where:

response_file

Is the file containing the keywords to install the product.

keyword=value

Is the keyword and the value of the response file you want to override.

Use the silent mode to install the BigFix server or to run problem determination on a failed installation.



Note: In the response file you can specify a subset of keywords, such as the keywords common to different systems. The missing or invalid keywords are requested by the installation program. The silent installation runs in unattended way only if all the required keywords are specified in the response file.

You can create a response file during an installation by redirecting the installation parameters in a response file using the following command:

```
./install.sh -g response_file
```

This is an example of response file for a production server installation:

```
##BigFix GENERATED RESPONSE FILE
BES_PREREQ_INSTALL="install"
IS_EVALUATION="false"
LA_ACCEPT="true"
COMPONENT_SRV="true"
COMPONENT_WR="true"
COMPONENT_WEBUI="true"
SINGLE_DATABASE="true"
LOCAL_DATABASE="true"
BES_WWW_FOLDER="/var/opt/BESServer"
WR_WWW_FOLDER="/var/opt/BESWebReportsServer"
WR_WWW_PORT="8083"
WEBUI_PORT="443"
WEBUI_REDIRECT_PORT="80"
INSTALL_DB2="yes"
DB2_INSTANCE_NAME="db2inst1"
DB2_DAS_USERNAME="dasusr1"
DB2_FENCED_USERNAME="db2fenc1"
DB2_INSTALL_DIR="/opt/ibm/db2/V11.5"
DB2_PORT="50000"
DB2_USERS_PWD="P@$$w0rd1"
TEM_USER_NAME="MyAdmin"
TEM_USER_PWD="P@$$w0rd1"
CONF_FIREWALL="yes"
BES_SETUP_TYPE="prodlic"
USE_PROXY="true"
PROXY_HOST="PROXYHOST.mydomain.com"
PROXY_PORT="3128"
ADV_PROXY_DEFAULT="false"
PROXY_USER="hans"
PROXY_PWD="P@$$w0rd1"
```

```

PROXY_METH="basic"
PROXY_EXLIST="localhost,127.0.0.1"
PROXY_SECTUNNEL="false"
PROXY_DOWN="false"
TEST_PROXY="nofips"
BES_CERT_FILE="/TEM/license.crt"
BES_LICENSE_PVK="/TEM/license.pvk"
BES_LICENSE_PVK_PWD="P@$w0rd1"
ENCODE_VALUE="1252"
ADV_MASTHEAD_DEFAULT="false"
BES_SERVER_PORT="52311"
ENABLE_FIPS="true"
BES_GATHER_INTERVAL="5"
INITIAL_LOCK="2"
LOCK_CONTROLLER="0"
ENABLE_LOCK_EXEMPT="false"
ENABLE_ARCHIVE_UTF8="true"
BES_LIC_FOLDER="./license"
WR_USER00T="false"
WR_NONROOT_USER_NAME="MyNoAdmin"

```

This is an example of response file for an evaluation server installation:

```

##BIGFIX GENERATED RESPONSE FILE
LA_ACCEPT="true"
IS_EVALUATION="true"
CREDENTIAL_USER_FIRSTNAME="John"
CREDENTIAL_USER_LASTNAME="Smith"
CREDENTIAL_EMAIL="john.smith@mydomain.com"
CREDENTIAL_ORG="HCL US"
SRV_DNS_NAME="DNSHOST.mydomain.com"
BES_SERVER_PORT="52311"
WR_WWW_PORT="8080"

```

```

CONF_FIREWALL="no"
DB2_INSTANCE_NAME="db2inst1"
DB2_ADMIN_USER="db2inst1"
DB2_ADMIN_PWD="P@$w0rd1"
DB2_PORT="50000"
BES_LIC_FOLDER="/opt/iemlic"
PVK_KEY_SIZE="max"
ENCODE_VALUE="1252"
USE_PROXY="true"
ADV_PROXY_DEFAULT="false"
PROXY_USER="none"
PROXY_HOST="PROXYHOST.mydomain.com"
PROXY_PORT="3128"
TEST_PROXY="nofips"
WEBUI_PORT="443"
WEBUI_REDIRECT_PORT="80"

```

where:

Table 3. Response file keywords

Keyword	Values
LA_ACCEPT	Accepts the License Agreement: true to accept and continue false to exit the installation
IS_PREREQ_CHECK	Available values are: true false
IS_EVALUATION	Specifies the type of installation:

Table 3. Response file keywords**(continued)**

Keyword	Values
	<code>true</code> to run an evaluation installation <code>false</code> to run a production installation  Note: The evaluation installation does not support the enhanced security option. For more information about this feature, see Security Configuration Scenarios.
CREDENTIAL_USER	Specifies the user name. An example is: <code>John Smith</code>.  Note: Valid in the evaluation installation only
CREDENTIAL_USER_FIRST-NAME	Specifies the user first name. An example is: <code>John</code>.  Note: Valid in the evaluation installation only
CREDENTIAL_USER_LASTNAME	Specifies the user last name. An example is: <code>Smith</code>.  Note: Valid in the evaluation installation only
CREDENTIAL_EMAIL	Specifies the user email address. An example is: <code>john.smith@us.ibm.com</code>.

Table 3. Response file keywords**(continued)**

Keyword	Values
	 Note: Valid in the evaluation installation only
CREDENTIAL_ORG	Specifies the user's organization. An example is: HCL US.  Note: Valid in the evaluation installation only
COMPONENT_SRV	Specifies to install the BigFix server component: <code>true</code> to install the server and client <code>false</code> to not install the server and the client
COMPONENT_WR	Specifies to install the BigFix Web Reports component: <code>true</code> to install Web Reports <code>false</code> to not install Web Reports
COMPONENT_WEBUI	Specifies to install the BigFix WebUI component: <code>true</code> to install the WebUI <code>false</code> to not install the WebUI
SINGLE_DATABASE	Creates a master database for later replication or if you only need a single database in your deployment. <code>true</code> to create a single database <code>false</code> to create a replicated database

Table 3. Response file keywords**(continued)**

Keyword	Values
LOCAL_DATABASE	Uses a local or remote database: <code>true</code> to use a local database <code>false</code> to use a remote database through a DB2 client
DB2_ADMIN_USER	Specifies the user name of the local DB2 Administrative user. Only if DB2 is already installed.
DB2_ADMIN_PWD	Specifies the password of the local DB2 Administrative user. Only if DB2 is already installed.
DB2INST_CONFIGURE	Configures the database during the BigFix installation: <code>yes</code> to configure the DB2 <code>no</code> to not configure the DB2 Only if DB2 is already installed.
BES_WWW_FOLDER	Specifies the installation folder of the BigFix server. The default value is <code>/var/opt/BESServer</code> .
WR_WWW_FOLDER	Specifies the installation folder of Web Reports. The default value is <code>/var/opt/BESWebReports-Server</code> .
WR_WWW_PORT	Specifies the Web Reports port number. The default value is <code>8083</code> if you are installing BigFix Version 9.5.2 and the configuration is HTTPS. The default value is <code>8080</code> if you are installing BigFix Version 9.5 and the configuration is HTTP.

Table 3. Response file keywords**(continued)**

Keyword	Values
WR_USERROOT	Specifies if the Web Reports service runs as root: <code>true</code> to run the service as root <code>false</code> to run the service with an user different from root
WR_NONROOT_USER_NAME	Specifies the user with which the Web Reports service runs.
INSTALL_DB2	Installs DB2 together with the BigFix server: <code>yes</code> to install DB2 <code>no</code> to not install DB2
DB2_INSTANCE_NAME	Specifies the name of the BigFix database instance. The default value is <code>db2inst1</code>.  Note: Starting from BigFix V9.5, you can install the product on a dedicated DB2 instance with a name different from the DB2 user name. Ensure that the DB2 instance name used to install the BES Root Server cannot contain the following special characters: blanks, tabs <code>\t</code>, returns <code>\n</code> and <code>;</code> & <code> </code> <code>"</code> <code>'</code> <code><</code> <code>></code>
DB2_DAS_USERNAME	Specifies the username of the account under which the DB2 administration server (DAS) runs. The default value is <code>dasusr1</code>.

Table 3. Response file keywords**(continued)**

Keyword	Values
DB2_FENCED_USERNAME	Specifies the user name of the account used to run user defined functions (UDFs) and stored procedures outside of the address space used by the DB2 database. The default user is <code>db2fenc1</code> .
DB2_INSTALL_DIR	Specifies the directory where to install DB2. For example: <code>/opt/ibm/db2/V10.5</code> .
DB2_PORT	Specifies the DB2 port. The default value is <code>50000</code> .
BES_PREREQ_INSTALL	Available values are: <code>ignore</code> <code>install</code> <code>exit</code>
BES_PREREQ_DB2_INSTALL	Available values are: <code>ignore</code> <code>install</code> <code>exit</code>
DB2_SETUP_FILE	Specifies the setup file to install DB2. For example: <code>../server_r/db2setup</code> .
DB2_USERS_PWD	Specifies the DB2 user password.
TEM_USER_NAME	Specifies the BigFix user ID to define the initial administrative user. The default value is <code>IEMAdmin</code> .  Note: Valid in the production installation only. In the evaluation installation the default user is <code>EvaluationUser</code> and the pass-

Table 3. Response file keywords**(continued)**

Keyword	Values
	 word is the password of the DB2 instance user.
TEM_USER_PWD	Specifies the password to define the initial administrative user.  Note: Valid in the production installation only. In the evaluation installation the default user is <code>EvaluationUser</code> and the password is the password of the DB2 instance user.
CONF_FIREWALL	Configures the firewall to enable the BigFix server or relay to connect to the Internet: <code>yes</code> to set the firewall configuration <code>no</code> not to set the firewall configuration
BES_SETUP_TYPE	Specifies the type of setup to run: <code>authfile</code> to install with a BES license authorization file <code>prodlc</code> to install with a Production license that is already available <code>masthead</code> to install with an existing masthead
BES_AUTH_FILE	Specifies the path of the authorization file. An example of path is: <code>/opt/iemlic/LicenseAuthorization.BESLicenseAuthorization</code>.

Table 3. Response file keywords**(continued)**

Keyword	Values
SRV_DNS_NAME	Specify the DNS name or IP address of the machine on which to install the server. This name is saved in your license and will be used by clients to identify the BigFix server. It cannot be changed after a license is created.
BES_LICENSE_PVK_PWD	Specifies the password of the <code>license.pvk</code> file.
ENCODE_VALUE	Specifies the deployment encoding to use when communicating with the infrastructure. The default value is 1252.
PVK_KEY_SIZE	Specifies the size in bits of the public key (<code>license.crt</code>): min Corresponds to 2048 bits. max Corresponds to 4096 bits. This is the default value.
BES_LIC_FOLDER	Specifies the License folder where the installation generates and saves <code>license.crt</code> , <code>license.pvk</code> and <code>masthead.afxm</code> . An example of License folder is <code>/tmp/ServerInstaller_9.5-rhel/offlic</code> .
SUBMIT_LIC_REQUEST	Submits the request to HCL for getting the license certificate:

Table 3. Response file keywords**(continued)**

Keyword	Values
	yes to submit a request from this machine over the Internet for a license certificate (<code>license.crt</code>) and saved in your credential folder. no to save the request to a file and manually submit it to HCL (http://support.bigfix.com/bes/forms/BESLicenseRequestHandler.html). This method might be necessary if your deployment is isolated from the public Internet.
USE_PROXY	Specifies a proxy connection to enable the BigFix server to connect to the Internet during the installation: <code>true</code> to set the proxy. <code>false</code> to not set the proxy.
PROXY_USER	Specifies the user of the proxy. If the proxy does not require authentication, you must set <code>PROXY_USER</code> to <code>NONE</code>.
PROXY_PWD	Specifies the password of the proxy user.
PROXY_HOST	Specifies the hostname of the computer where the proxy is running.
PROXY_PORT	Specifies the port of the computer where the proxy is running.
ADV_PROXY_DEFAULT	Accepts the default proxy configuration settings:

Table 3. Response file keywords**(continued)**

Keyword	Values
	<code>true</code> to use the default values <code>false</code> to use custom values.
PROXY_METH	Restricts the set of authentication methods that can be used. You can specify more than one method separated by a comma. Available methods are: <code>basic</code> <code>digest</code> <code>negotiate</code> <code>ntlm</code> By default the proxy chooses the authentication method to use.
PROXY_EXLIST	Specifies a comma-separated list of computers, domains, and subnetworks that must be reached without passing through the proxy. For information about the syntax to use, see Setting a proxy connection on the server (on page 427).
PROXY_SECTUNNEL	Specifies whether or not the proxy is enforced to attempt tunneling. Available values are: <code>true</code> to enable proxy tunneling. <code>false</code> to not enable proxy tunneling.
PROXY_DOWN	Specifies if all HTTP communications in your Big-Fix environment, including downstream communi-

Table 3. Response file keywords**(continued)**

Keyword	Values
	cations, pass through the proxy. Available values are: <code>true</code> <code>false</code>
TEST_PROXY	Specifies if and how the connection to the proxy must tested. This is an optional step. Available values are: <code>nofips</code> to test the connection without using FIPS. <code>fips</code> to test the connection using FIPS. <code>no</code> to not test the connection.
BES_MASTHEAD_FILE	Specifies the path to the masthead file.
BES_CERT_FILE	Specifies the path to the license certification file.
BES_LICENSE_PVK	Specifies the path to the private key file.
ADV_MASTHEAD_DEFAULT	Specifies whether or not to accepts the default masthead settings. Available values are: <code>true</code> to use the default values <code>false</code> to use custom values.
BES_SERVER_PORT	Specifies the number of the server port. The default value is: 52311.
ENABLE_FIPS	Specifies whether or not to enable FIPS 140-2 compliant cryptography. Available values are:

Table 3. Response file keywords**(continued)**

Keyword	Values
	<code>true</code> to enable FIPS. <code>false</code> to not enable FIPS.
BES_GATHER_INTERVAL	Specifies how long the clients wait without hearing from the server before they check whether new content is available. Available values are: <code>0</code> for fifteen minutes. <code>1</code> for half an hour. <code>2</code> for one hour. <code>3</code> for eight hours. <code>4</code> for half a day. <code>5</code> for one day. <code>6</code> for two days. <code>7</code> for one week. <code>8</code> for two weeks. <code>9</code> for one month. <code>10</code> for two months.
INITIAL_LOCK	Specifies the initial lock state of all clients after installation. Locked clients report which Fixlet messages are relevant for them, but do not apply any actions. The default is to leave them unlocked. Available values are: <code>0</code> <code>1</code> <code>2</code>
LOCK_CONTROLLER	Specifies who can change the action lock state. Available values are:

Table 3. Response file keywords**(continued)**

Keyword	Values
	0 to allow any Console operator with management rights to change the lock state of any client in the network. This is the default value. 1 to delegate control over locking to the end user. 2
LOCK_DURATION	Specifies the number of minutes that the clients must be locked.
ENABLE_LOCK_EXEMPT	Specifies if specific URLs must be exempted from locking actions. Available values are: true false
EXCEPTION_URL	Specifies the URL to except from locking actions. Use the following format 'http://domain'.
ENABLE_ARCHIVE_UTF8	Specifies the codepage used to write filenames in the BigFix archives. Available values are: true to write filenames UTF-8 codepage. false to not write filenames UTF-8 codepage.
IS_SILENT	Forces the installation to end with a message if a required parameter is missing:

Table 3. Response file keywords**(continued)**

Keyword	Values
	<code>true</code> to force the installation to end if a required parameter is missing. <code>false</code> to prompt the user for the missing parameter. If a parameter is missing the installation variable associated with the missing parameter is reported in the error message.
WEBUI_PORT	Specifies the WebUI port number. The default value is 443.
WEBUI_REDIRECT_PORT	Specifies the WebUI redirect port number. The default value is 80.

Installing the Client on Linux

For more details about how to install the Clients, see section [Installing the clients \(on page 227\)](#).

Installing the Console

You can install the BigFix console on any Windows computer that can make a network connection via HTTPS port 52311 to the Server.

Except in testing or evaluation environments, it is not recommended to run the Console on the Server computer due to the performance and security implications of having the publisher key credentials on a computer that is running a database or web server. Using the BigFix console you can monitor and fix problems on all managed computers across the network.

To install the console, follow these steps:

1. Go to `/var/opt/BESInstallers` directory.
2. Copy the `Console` folder to a Windows workstation. Use the `Console` folder of the same build level.
3. From the `Console` directory on the Windows workstation run: `setup.exe`



Note: By default the local operating system firewall is enabled. To allow the Console to connect to the BigFix Server, ensure that the firewall is configured to allow tcp and udp communications through the Server port (default 52311) and tcp communications through Web Reports Ports (default 80).

If you need to manually configure the local firewall you can run the following commands:

```
iptables -I INPUT -p tcp --dport < Server_Port > -j ACCEPT
iptables -I INPUT -p udp --dport < Server_Port > -j ACCEPT
iptables -I INPUT -p tcp --dport < WebReports_Port > -j ACCEPT
service iptables save
```

For more details about using the Console program see the BigFix Console Users Guide .

Installation Folder Structure

After the BigFix installation, you can see the following folder structure:

Server Folder Structure:

```
/var/opt/BESInstallers
/var/opt/BESInstallers/Client (Client installer)
/var/opt/BESInstallers/Console (Console installer)

/var/opt/BESServer
  besserver.config (Configuration file)
  besserver.config.default (Default configuration file)

/var/opt/BESServer/FillDBData/FillDB.log (FillDB service log)
```

```

/var/opt/BESServer/GatherDBData/GatherDB.log (GatherDB service log)

/opt/BESServer
/opt/BESServer/bin (Server binaries)
/opt/BESServer/reference (Rest API xsd templates)

/etc/opt/BESServer
  actionsite.afxm (Masthead file)

/etc/init.d
  besserver (Server service)
  besfilldb (FillDB service)
  besgatherdb (GatherDB service)

```

If you want to move the content of the directories:

```

/var/opt/component_folder
/opt/component_folder

```

For example the `/var/opt/BESServer` directory, to a new location, you can use the UNIX symbolic link feature to point to the new directory.

Web Reports Folder Structure:

```

/var/opt/BESWebReportsServer
  beswebreports.config (Configuration file)
  beswebreports.config.default (Default configuration file)

/opt/BESWebReportsServer
/opt/BESWebReportsServer/bin (WebReports binaries)

/etc/opt/BESWebReportsServer
  actionsite.afxm (Masthead file)

```

```
/etc/init.d
  beswebreports (WebReports service)
```

If you want to move the content of the directories:

```
/var/opt/component_folder
/opt/component_folder
```

For example the `/var/opt/BESWebReportsServer` directory, to a new location, you can use the UNIX symbolic link feature to point to the new directory.

Client Folder Structure:

```
/var/opt/BESClient
  besclient.config (Configuration file)
  besclient.config.default (Default configuration file)

/opt/BESClient
/opt/BESClient/bin (Client binaries)

/etc/opt/BESClient
  actionsite.afxm (Masthead file)

/etc/init.d
  besclient (besclient service)
```

If you want to move the content of the directories:

```
/var/opt/component_folder
/opt/component_folder
```

For example the `/var/opt/BESClient` directory, to a new location, you can use the UNIX symbolic link feature to point to the new directory.

Install Log Files:

```
/var/log/
  BESInstall.log (Installer log file)
```


BESAdminDebugOut.txt (Administrator Tool debug information)
 BESRelay.log (Relay log file)

Be aware that if one of the following folders does not exist, the installation procedure fails:

/opt
 /etc
 /var

Common files:

/var/opt/BESCommon

This folder contains files which are relevant to the identification of BigFix components. You must not modify or remove them.

Configuration, Masthead, and Log Files

At the end of the installation you can find the following BigFix files containing the settings of the installed components and the installation messages:

Table 4. Configuration and Log BigFix Files

Configuration and Log BigFix Files

Component	File
Server	• Configuration file: /var/opt/BESServer/besserver.config • Masthead file: /etc/opt/BESServer/actionsite.afxm • Log files: /var/log/BESInstall.log, /var/log/BESAdminDebugOut.txt

Table 4. Configuration and Log BigFix Files**Configuration and Log BigFix Files****(continued)**

Component	File
Web Report	• Configuration file: <code>/var/opt/BESWebReportsServer/beswebreports.config</code> • Masthead file: <code>/etc/opt/BESWebReportsServer/actionsite.afxm</code>
Client	• Configuration file: <code>/var/opt/BESClient/besclient.config</code> • Masthead file: <code>/etc/opt/BESClient/actionsite.afxm</code>
Relay	• Configuration file: <code>/var/opt/BESRelay/besrelay.config</code>

The configuration files contain settings for traces, database connection, and proxy configuration. The BESServer, BESFillDB, and BESGatherDB services search for the configuration parameters first on `besclient.config` and then on `besserver.config`. The BESWebReports service searches for the configuration parameters first in `besclient.config` and then in `beswebreports.config`.

Managing the BigFix Services

You can start, stop, restart, or query the status of Linux BigFix services using the following commands:

```
service service stop
service service start
service service restart
service service status
```

```
/etc/init.d/service stop
/etc/init.d/service start
/etc/init.d/service restart
/etc/init.d/service status
```

where *service* is one of the following services:

```
besclient
besfilldb
besgatherdb
besserver
beswebreports
```



Note: Ensure you do not use the `systemctl` command to manage a service.

If you installed the BES Server Plugin Service (MFS), use these commands to start and stop it:

```
service mfs start
service mfs stop
```

Changing the database password

After you install the database of the BigFix server, you can change its password by running the following command:

- On Windows operating systems:

```
.\BESAdmin.exe /updatepassword /type=<server_db|dsa_db>
[/password=<password>] /sitePvkLocation=<path+license.pvk>
[/sitePvkPassword=<pvk_password>]
```

- On UNIX operating systems:

```
./BESAdmin.sh -updatepassword -type=<server_db|dsa_db>
[-password=<password>] -sitePvkLocation=<path+license.pvk>
[-sitePvkPassword=<pvk_password>]
```



Note: This procedure on UNIX also updates the database password for Web Reports, if the Web Reports component is installed on the same system where the BigFix server is installed.

where:

type=server_db

If you changed the database instance password, specify this value to update the password used by the server to authenticate with the database.

If you modify this value, the command restarts all the BigFix server services.

type=dsa_db

If you changed the database instance password on a server of a DSA configuration, specify this value to update the password used in a DSA configuration by remote servers to authenticate with the database.

For example:

```
./BESAdmin.sh -updatepassword -sitePvkLocation=/mylicenses/license.pvk
-sitePvkPassword=***** -type=server_db
```

The settings `-password` and `-sitePvkPassword` are optional; if they are not specified in the command syntax their value is requested interactively at runtime. The password set by this command is obfuscated.

Changing the database password on UNIX on Web Reports

On UNIX operating systems, to change the database password on the local and remote Web Reports server, complete the following steps:

1. Stop the `beswebreports` service:

```
service beswebreports stop
```

2. Open the configuration file: `/var/opt/BESWebReportsServer/beswebreports.config`

3. Go to `[Software\BigFix\Enterprise Server\FillAggregateDB]` and set:

```
Password = "db2newpassword"
```

4. Start the `beswebreports` service:

```
#service beswebreports start
```

After restart, passwords are obfuscated and substituted again with `"` in the configuration files.

Changing the DB2 port

After you install the DB2 database of the BigFix server, you can change the DB2 instance connection port and set it in the BigFix configuration files as follows:

1. Stop all the BigFix services and all applications connected to the DB2 instance.
2. Change the DB2 connection port:

```
#su - db2inst1
$db2 update dbm cfg using SVCENAME <new_port_number>
$db2stop; db2start
```

3. Open the configuration file: `/var/opt/BESServer/besserver.config`
4. Go to `[Software\BigFix\EnterpriseClient\Settings\Client\_BESServer_Database_Port]` and set the new port number as follows:

```
value = "<new_port_number>"
```

5. Open the configuration file: `/var/opt/BESWebReportsServer/beswebreports.config`
6. Go to `[Software\BigFix\Enterprise Server\FillAggregateDB]` and set the new port number as follows:

```
Port = "<new_port_number>"
```

7. Start all the BigFix services.

Removing the Product Components on Linux systems

You can have one or more BigFix components installed on a local system and you can decide to remove one or all of them at the same time.

To uninstall one or more BigFix components installed on a local Linux system, run the following steps:

1. Look for the installed BigFix RPM packages by entering the following command:

```
rpm -qa | grep BES
```

2. Remove the Server, the WebUI, the Client, and Web Reports RPM files:

```
rpm -e BESWebUI
rpm -e BESWebReportsServer
rpm -e BESRootServer
rpm -e BESRelay
rpm -e BESClientDeployTool
rpm -e BESAgent
```



Note: You cannot remove BESAgent until you remove all components depending on it (BESRootServer, WebUI, and so on).

3. Remove the following files and folders:

Warning: If you do not plan to remove all BigFix components, keep the folder `/var/opt/BESCommon`.

```
/etc/opt/BES*
/opt/BES*
/tmp/BES
```

```
/var/log/BES*
/var/opt/BES*
```

Where: BES* is a prefix followed by the name of a BigFix component, for example "BESClient".

4. Remove the BFENT and BESREPOR local databases:

```
su - db2inst1
db2 drop db BFENT
db2 drop db BESREPOR
```

or the BFENT and BESREPOR remote databases:

```
su - db2inst1
db2 attach to TEM_REM user <UserName> using <Password>
db2 drop db BFENT
db2 drop db BESREPOR
db2 detach
db2 uncatalog node TEM_REM
```

DSA on Linux

Installing Additional Linux Servers (DSA)

For each additional server that you want to add to your deployment, ensure that they are communicating with each other, and then follow these steps:

1. Download the BigFix Server installer having the same version as the one installed on the master server. Ensure that each server uses the same DB2 version.
2. Copy the `license.pvk` and `masthead.afxm` files from the master server to each computer where you intend to install an additional DSA Server.
3. Each DSA Server must have **its own** DB2 database engine, either local or remote. Do not use the same database engine to store the databases of two different DSA servers. Each DSA Server must be able to access its own database engine and

also the database engines of the other DSA Servers. Use the same user name and password to access all your database engines.

4. Run the `install.sh` script on each computer that you want to configure as an additional Server.
5. On the `Select Install Type` prompt, choose:

```
[2] Production: Install using a production license or an authorization
    from
    a production license
```

6. On the `Select the BigFix Features you want to install` prompt, choose a combination of components that includes the BigFix Server. Do not install the WebUI component on the secondary DSA servers.
7. On the `Select Database Replication` prompt, choose:

```
[2] Replicated Database.
```

8. On the `Select Database` prompt, choose `[1] Use Local Database` (typical for most applications).



Note: You can also select a remote database hosted on a different computer. In this case ensure that the computer you are installing BigFix on can resolve the hostname of the remote server where the database resides.

9. On the `DB2 Local Administrative User` prompt, assuming you chose `Use Local Database` earlier, enter the user name and password of the DB2 administrative user for the database on the computer where the installation script is running.
10. Enter the Web Server Root folder path.
11. If you chose to install the Web Reports component, enter the requested information.
12. Specify the location of `license.pvk` and its password.
13. Specify the location of the existing `masthead.afxm` file that was generated when installing the master server.
14. On the `Secondary Server DNS Name` prompt, enter the DNS name of the new server. This name must be resolvable by other servers and by clients.
15. On the `DB2 Connection` prompt, enter the port number of the local DB2 instance.

16. Enter the information to allow the new server to connect to the DB2 instance of the master server:

On the `Master Server Database Hostname` prompt, specify the hostname of the master server database host.

On the `Master Server Database Port` prompt, specify the database port number of the master server database host.

On the `Master Server Database Administrative User` prompt, specify the user name of the DB2 administrative user of the master server database host.

On the `Master Server Database Administrative User Password` prompt, specify the password of the DB2 administrative user of the master server database host.

17. On the master server, run the resign security data command by using the BigFix Administration tool.

```
./BESAdmin.sh -resignsecuritydata
```

For additional information, see [BESAdmin Linux Command Line \(on page 321\)](#).

18. Verify that the other servers have been replicated.

Authenticating Additional Servers (DSA)

Multiple servers can provide a higher level of service for your BigFix installation.

If you choose to add Disaster Server Architecture (DSA) to your installation, you will be able to recover from network and systems failures automatically while continuing to provide local service. To take advantage of this function, you must have one or more additional servers with a capability at least equal to your primary server. Because of the extra expense and installation involved, you should carefully think through your needs before committing to using DSA.

Your servers can communicate with each other using the DB2 inter-server authentication option.

Before installing the additional Linux Servers, install the DB2 server on each machine that you want to add to your deployment. The version of the DB2 server must be the same as the DB2 server installed on the Master Server.

Using DB2 Authentication

With this technique, each Server is given a login name and password, and is configured to accept the login names and passwords of all other Servers in the deployment.

The password for this account typed in clear text is obfuscated in the configuration file on each server, after the restart of the FillDB service. To authenticate your servers using DB2 Authentication, follow these steps:

1. Choose a single login name (for example, `db2inst1`), and a single password to be used by all servers in your deployment for inter-server authentication.
2. On the Master Server, open the `/var/opt/BEServer/besserver.config` file.
3. Add or modify the following keywords in the `[Software\BigFix\Enterprise Server\FillDB]` section:

```
ReplicationUser = <login name>
ReplicationPassword = <password>
ReplicationPort = <DB2_port>
ReplicationDatabase = BFENT
```

4. Restart the FillDB service.



Note:

This choice must be made on a deployment-wide basis; you cannot mix domain-authenticated servers with DB2-authenticated servers. `ReplicationUser`, `ReplicationPassword`, and `ReplicationPort` must be uniquely defined in all the server configuration files of your DSA environment. All BigFix servers in your deployment must be running the same version of DB2 server.

Uninstalling a Linux replication server

To uninstall a replication server, call the database-stored procedure `delete_replication_server`, which removes the specified ID from the replication set.

Ensure you specify the identifier of the server to delete. You must log in to the DB2 database and run the following procedure:

```
call dbo.delete_replication_server(n)
```

where *n* is the identifier of the server to delete.

Chapter 10. Installing the clients

Install the BigFix client on every computer in your network that you want to administer, including the computer that is running the console.

This allows that computer to receive important Fixlet messages such as security patches, configuration files, or upgrades.

Using the Client Deploy Tool

You can use the Client Deploy Tool (CDT) to install Windows, UNIX and Mac target computers.

The Client Deploy Tool helps you roll out targets in an easy way, but there are some requirements and conditions:

- Depending on whether you are using the Client Deploy Tool on a Windows or on a Linux system, you can use the tool to install different platforms:

CDT on Windows

Installs Windows, UNIX and Mac target computers.

CDT on Linux

Installs UNIX and Mac target computers.

Target prerequisites

To successfully deploy target computers from the Client Deploy Tool, ensure that you satisfy the following prerequisites, depending on the target operating system.

Prerequisites needed for the **UNIX/MAC** target computers:

- The bash shell must be installed.

For AIX and Solaris target computers, which do not have a bash shell installed by default, the Korn shell can be used.

- The SCP and SSH protocols must be enabled. The SSH protocol must be enabled on port 22.

- The root user must exist, or any other user with SUDO privileges enabled.
- The user with SUDO privileges must be configured as not requiring TTY.
- The user, configured to access the target computer by using the SSH key authentication, must be one of the following:
 - root
 - a user configured to run SUDO without a password.



Note: You can deploy on Windows target computers only if you are using the Client Deploy Tool on a Windows system.

Prerequisites needed for the **Windows** target computers:

- From the Control Panel, go to **Network and Internet > Network and Sharing Center > Change advanced sharing settings** and in the "current profile" section, select the "Turn on file and printer sharing" option.
- Launch services.msc and ensure that the "Remote Registry" service is not disabled. It is sufficient to have it in Manual mode, the operating system will start it when needed.
- Restart the workstation for the changes to take effect, if required.
- Ensure that the administrative shares are not explicitly disabled. Locate the registry values:

```
[HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\
LanmanServer\Parameters]
```

"AutoShareServer" should be 1 (explicitly enabled) or absent.

"AutoShareWks" should be 1 (explicitly enabled) or absent.

- Ensure that the firewall is not blocking the "File and Printer Sharing" service on port 445.

From the Control Panel, go to **System and Security > Windows Firewall > Advanced settings**.

In the "Windows Firewall with Advanced Security" panel, perform the following checks:

- Inbound Rules: The service "File and Printer Sharing (SMB-In)" is allowed to access the local port 445.
- Outbound Rules: The service "File and Printer Sharing (SMB-Out)" is allowed to access the remote port 445.
- The remote computers you want to deploy to must be reachable using the Windows Remote Procedure Call (RPC) protocols.



Note: The Client Deploy Tool will not work if there is a firewall blocking traffic between you and the remote computer or if the remote computer has a personal firewall blocking traffic. By default, RPC uses port 135 as well as a random port above 1024. If you are using a firewall, you might want to configure the RPC port to a specific port number so that you can lock it down and allow traffic across that port without opening the firewall completely (see:<http://support.microsoft.com/kb/154596>). RPC can use TCP or UDP ports so you should allow for both. The Client Deploy Tool itself does not make use of any other ports beyond what RPC utilizes. After the client is installed, it will use whichever port you have specified for your license (TCP/UDP 52311 by default).

You cannot have any network or security policies in place that might prevent the application from connecting to the remote computer and running a service that uses the domain administrator credentials to copy files from a shared location and run them locally on the computer.

Client Deploy Tool wizard

The Client Deploy Tool wizard was introduced with BigFix Version 9.5 Patch 7.

Recommended scenario

You can use the Client Deploy Tool (CDT) to install Windows, UNIX and Mac target computers.


Client Deploy Tool: Recommended scenario

This scenario describes the recommended steps to install and use the Client Deploy Tool in your environment. The scenario is supported both if you have a BigFix Windows or Linux server.

From the BigFix console, perform these steps:

1. Install the Client Deploy Tool on the target computers of your environment and deploy the client computers by running the Client Deploy Tool wizard. For details about this operation, see [Deploying clients from the console \(on page 231\)](#).
2. After using the Client Deploy Tool wizard, you can view the deployment results in the Client Deploy Tool dashboard. For details about this operation, see [Viewing the deployment results in the dashboard \(on page 235\)](#).

The following graphic shows the details of this process. Only the first step (in blue) is manually run by an operator, while the other three steps (in green) are performed automatically when running the Client Deploy Tool wizard.

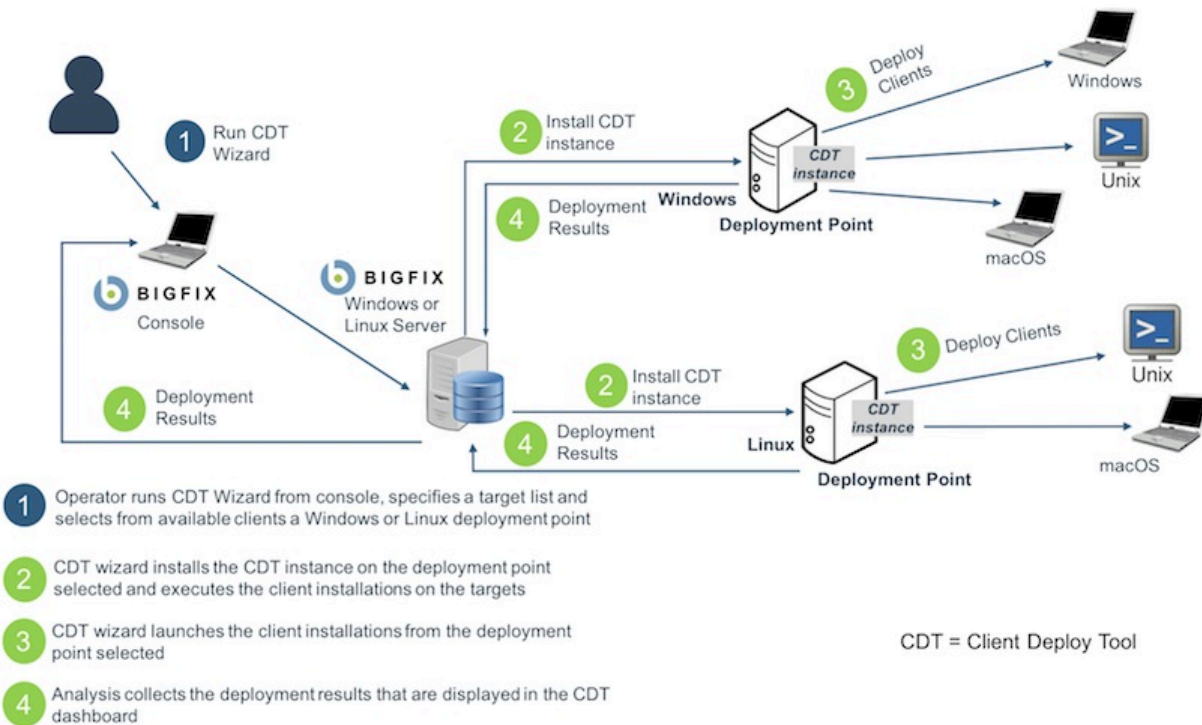

Deploying clients from the console

Prerequisites:

Before deploying the BigFix clients from the **Client Deploy Tool Wizard**, ensure that you locate and activate globally the following analyses:

Table 5. Analyses to activate globally

ID	Name
204	BES Component Versions
2814	Collect BES Client Deploy Tool Reports

From the BigFix console, click **Wizards > All Wizards > Client Deploy Tool Wizard**.

The **Client Deploy Tool Wizard** will guide you through the deployment of the BigFix clients.

You can also launch the same wizard from the **Unmanaged Assets** view of the console by performing these steps:

1. Select one or more assets in the view.
2. Right-click them. A menu opens.
3. Click **Install BigFix Client**.



Note:

The displayed Client Deploy Tool Wizard already contains the following prefilled information:

- The names of the assets selected in step 1.
- The selection of the operating systems installed on the assets selected in step 1, found by the Nmap scan run on the assets.

In the **Set Target Credentials** page of the wizard:

1. Click **Add Targets**.
2. Enter the host name or the IP address of the target computers.

3. Select the target computers displayed on the list.
4. Click **Set Credentials**.
5. Enter the user name and password needed to access the target computers.
6. Starting from Version 9.5.10, you can select the **Use Key File** check box if you use a private key file, supported by the SSH authentication method, instead of a password. You can also specify a passphrase if it was specified when generating the private key. Only ASCII characters are supported. Use a private key file in PEM format.



Note: The SSH authentication method is not supported to install Windows target clients.



Note:

The user, configured to access the target computer by using the SSH key authentication, must be one of the following:

- root
- a user configured to run SUDO without a password.



Note: If you enabled FIPS mode and you use SSH key authentication with passphrase to install the clients, ensure that your certificates are generated using FIPS compliant algorithms.



Note: The only SSH algorithms supported to access the target computers through the SSH key authentication are ssh-rsa and ssh-dsa.

7. Click Next to proceed to the **Select Deployment Point** page.



Note: By clicking each header of the table, you display a search box in each wizard page, useful to easily locate specific devices if you have a very long list of targets in the tables.

In the **Select Deployment Point** page of the wizard:

1. Select the target computers displayed on the list.
2. Click **Select Deployment Point**.
3. Select a deployment point from the list.



Note:

The deployment points displayed by this list are a set of:

- All computers on which the Client Deploy Tool can be installed, and which are relevant for the Fixlet "Install/Update BigFix Client Deploy Tool Version 9.5". Remove 'yes' from the 'Is Preferred' filter to have the list of all computer selections available.
- All computers on which a standalone Client Deploy Tool (any Version) is installed. If an older version is found, the Client Deploy Tool will be upgraded to Version 9.5.7.
- All computers with a BigFix Console Version 9.5.7 or later.

4. Click Next to proceed to the **Set Deployment Point Credentials** page.

In the **Set Deployment Point Credentials** page of the wizard (This page is displayed only if the deployment point is a Windows system):

1. Select the deployment point displayed on the list.
2. Click **Set Credentials**.
3. Enter the credentials needed to access the deployment point.
4. Click Next to proceed to the **Set Advanced Settings** page.

In the **Set Advanced Settings** page of the wizard:

1. Select the operating systems to be deployed, if not already prefilled by the results of the Nmap scan run on the assets.
2. Select the client version to be installed on your target computers.
3. Select the **Show advanced settings** check box.

(Optional) In the "Custom Settings" section, add a list of custom client settings to apply to each client that will be deployed by the Client Deploy Tool.

You can input these settings in either a table or a text box. If you use the table, add a row for each setting, then enter its name and value in the respective columns. If you use the text box, add a new line for each setting, then enter its name and value in the format "name=value".

(Optional) In the "Proxy Settings" section, if the clients to be deployed must communicate through a proxy, enter the following information:

Address

The host name that is used to reach the proxy.

Port

The port that is used to communicate with the proxy.

Username

The user name that is used to authenticate with the proxy if the proxy requires authentication.

Password

The password that is used to authenticate with the proxy if the proxy requires authentication.

(Optional) Starting from Version 9.5.10, there is also a section where you can enter a custom installation path for the Windows target computers.

4. Click Next to proceed to the **Deploy Clients** page.

In the **Deploy Clients** page of the wizard:

1. Review the following summary information displayed by the wizard:

- The list of all target computers on which the BigFix client will be installed. The user names needed to access the target computers. The deployment point that will be used for each target computer.
- If new deployment points were specified, a list of the deployment points on which the Client Deploy Tool will be installed.
- On each deployment point, the BigFix client packages that will be downloaded, if not already present.

2. If the summary information is correct, click **Deploy**.

After clicking Deploy, the **Client Deploy Tool Dashboard** displays the details of your BigFix client deployments. For more information about the dashboard, see [Viewing the deployment results in the dashboard \(on page 235\)](#).

Viewing the deployment results in the dashboard

How to view the details of your BigFix client deployments.

Prerequisites:

Before viewing the deployment results in the dashboard, ensure that you locate and activate globally the following analyses:

Table 6. Analyses to activate globally

ID	Name
204	BES Component Versions
2814	Collect BES Client Deploy Tool Reports

Moreover, ensure that the clients and server/console clocks are synchronized to make the dashboard work properly.

From the BigFix console, click **Dashboards > BES Support > Client Deploy Tool Dashboard**.

The **Client Deploy Tool Dashboard** shows you the details of your BigFix client deployments.

The Dashboard displays the following information about the client deployments:

- The host name or IP address of the target computer on which you deployed the client.
- The operating system installed on the target computer.
- The deployment point used.
- The deployment status.
- In case of a failed deployment, the installation error message.
- The date and time on which the deployment occurred.



Note: By clicking the small magnifying glass icons in the table header, you display a search box, useful to easily locate specific devices if you have a very long list of targets. By clicking a column header, you sort the rows by the values of that column.

By clicking **Deploy BigFix Clients**, you open the **Client Deploy Tool Wizard**.

For more information about the Wizard, see [Deploying clients from the console \(on page 231\)](#).

By clicking **Upload Deploy Logs**, you upload the Client Deploy Tool target log files to the BigFix server by running a Fixlet.

For more information about the Fixlet, see [Uploading the target logs to the server \(on page 245\)](#).

Client Deploy Tool Fixlet

The Client Deploy Tool Fixlets were introduced with BigFix Version 9.5 Patch 5.

Installing the Client Deploy Tool from the console

As a prerequisite to install the Client Deploy Tool, ensure that you have a BigFix client installed on the target computers. The Fixlet is relevant if the BigFix client is installed, while the console is not. The Client Deploy Tool and the console are mutually exclusive. If the console is installed, the Client Deploy Tool is already installed under the same console directory.

To install the Client Deploy Tool from the BigFix console by running a Fixlet, perform the following steps:

1. Log in to the BigFix console.
2. Open the **Fixlets and Tasks** icon in the Domain Panel.
3. In the search bar, enter Client Deploy Tool.
4. Select the Fixlet named **Install/Update BigFix Client Deploy Tool (Version X)**.
5. Click **Take Action**.
6. Select the target computers on which you want to perform the installation. Typically, a BigFix server or one or more relays.
7. Click **OK**. Verify the status of the Fixlet.

After performing the Client Deploy Tool installation, you can use the tool to deploy the target computers as described in [Deploying clients by using a Fixlet \(on page 237\)](#).

By running the Fixlet named **Uninstall Client Deploy Tool**, you can remove the Client Deploy Tool installations.

Deploying clients by using a Fixlet

Deploy client computers from the BigFix console by running the **Install BigFix Clients with Client Deploy Tool** Fixlet. This Fixlet cannot be imported into a custom site. You must use it from the BES Support site.

To deploy the clients from the console, perform the following steps:

1. Log in to the BigFix console.
2. Open the **Fixlets and Tasks** icon in the Domain Panel.
3. In the search bar, enter Client Deploy Tool.
4. Select the Fixlet named **Install BigFix Clients with Client Deploy Tool**.
5. In the **Description** tab, you must:
 - Select all the operating systems associated to the client computers that you want to deploy. Select the client version that you want to deploy.
 - Enter the credentials needed to access the computer on which you installed the Client Deploy Tool. These credentials are required only if you installed the Client Deploy Tool on a Windows system. Specify either a domain administrator account with all necessary permissions or any administrator account with full local administrative permissions on the Client Deploy Tool computer.

- Enter the following required information for the client computers that you want to deploy:

Computers

Enter the client computer names by using one of the following options:

- The list of host names of the client computers.
- The list of IP addresses of the client computers.
- The IP address range of the client computers.

If you specify a range of IP addresses, use the following format:

```
192.0.2.1-20
```

Username

The user ID needed for the connection. For example, Administrator on Windows systems or root on Linux systems.

Password

The password associated to the user ID of the client computers.



Note: In the **Computers** text box, you can specify more than one line by pressing Enter at the end of each line.



Note: For each line, you have the possibility to enter the specific credentials associated to the client computers.

- Select the **Show advanced settings** check box.

(Optional) In the "Custom Settings" section, add a list of custom client settings to apply to each client that will be deployed by the Client Deploy Tool.

You can input these settings in either a table or a text box. If you use the table, add a row for each setting, then enter its name and value in the respective columns. If you use the text box, add a new line for each setting, then enter its name and value in the format "name=value".

(Optional) In the "Proxy Settings" section, if the clients to be deployed must communicate through a proxy, enter the following information:

Address

The host name that is used to reach the proxy.

Port

The port that is used to communicate with the proxy.

Username

The user name that is used to authenticate with the proxy if the proxy requires authentication.

Password

The password that is used to authenticate with the proxy if the proxy requires authentication.

6. Click **Take Action**.
7. On the **Target** tab, select one or more devices, which are target computers on which you installed the Client Deploy Tool instances.
8. Click **OK**.
9. Verify the status and the exit code of the Fixlet. The exit code 0 represents the Success status.



Note: When running the Fixlet, depending on the operating systems that you selected in the **Description** tab of the Fixlet, the platform-specific packages are cached on the BigFix server and downloaded only on the client computers where the Client Deploy Tool is installed. Packages are downloaded only if they are not found; they are not overwritten each time you run the Fixlet.



Note:

If you deploy old BigFix client versions, such as 9.1 and 9.2, or any other version older than the Client Deploy Tool version installed using the **Install BigFix Clients**



with Client Deploy Tool Fixlet, the locally installed Client Deploy Tool user interface might no longer work.

This known issue is caused by the `BESClientsCatalog.xml` file level that is replaced with the version deployed by the Fixlet. To solve this known issue, manually run again the Fixlet to deploy the latest client version and the latest valid `BESClientsCatalog.xml` catalog file will be replaced again.

It is highly recommended to use the Fixlet instead of the locally installed Client Deploy Tool user interface to deploy the clients.

Troubleshooting the client deployment

After running a Fixlet to deploy target computers using the Client Deploy Tool, if some target computers were not deployed correctly, you can verify some Client Deploy Tool directories and their contents.

If your Client Deploy Tool instance was on a UNIX target computer, you can perform the following checks:

1. Verify that the `BESClientsCatalog.xml` file is present in the `/var/opt/BESClientDeployTool` directory.
2. Verify that the packages containing the client images are stored in the `/var/opt/BESClientDeployTool/BigFixInstallSource/ClientInstaller` directory.

If your Client Deploy Tool instance was on a Windows target computer, you can perform the following checks:

1. Verify that the `BESClientsCatalog.xml` file is present in the `C:\Program Files(x86)\BigFix Enterprise\BES Client Deploy` directory.
2. Verify that the packages containing the client images are stored in the `C:\Program Files (x86)\BigFix Enterprise\BES Client Deploy\BigFixInstallSource\ClientInstaller` directory.

Troubleshooting other common errors and problems on UNIX and MAC target computers:

To successfully deploy UNIX and MAC target computers using the Client Deploy Tool and a user with SUDO privileges, the user with SUDO privileges must be configured as not requiring TTY.

Troubleshooting other common errors and problems on Windows target computers:

The following net use command:

```
net use * \\targetcomputer\admin$ /user:domain\user password
```

can be used to discover which type of error the Client Deploy Tool is running into with the Windows target computers.

- If you receive in the Client Deploy Tool the message "**Offline**", typically with net use you get the following error:

Error: System error 53 has occurred. The network path was not found.

Meaning: The computer cannot be contacted.

- If you receive in the Client Deploy Tool the message "**Connection Failed**", with net use you get one of the following errors:

Error: System error 53 has occurred. The network path was not found.

Meaning: ADMIN\$ share is not available.

Error: System error 1219 has occurred. Multiple connections to a server or shared resource by the same user, using more than one user name, is not allowed.

Disconnect all previous connections to the server or shared resource and try again.

Meaning: If the computer used to run the Client Deployment Tool already has a connection to a remote machine ADMIN\$ share, using a different credential, this error occurs.

Error: System error 1311 has occurred. There are currently no logon servers available to service the logon request.

Meaning: The domain server is not available for authentication.

Error: System error 1326 has occurred. Logon failure: unknown user name or bad password.

Meaning: Incorrect administrative user name or password.

- If you receive in the Client Deploy Tool the message "**Access is Denied**" or "**Windows Error: Logon failure: unknown user name or bad password**", with net use you get the following error:

Error: System error 5 has occurred. Access is denied.

Meaning: User name/password are correct, but the account does not have permission to ADMIN\$ share.

Error: No network provider accepted the given network path.

Meaning: The client or the server could not be resolved during the client deploy tool process.

The "Access is Denied" or "Windows Error: Logon failure: unknown user name or bad password" status indicates that the Client Deploy Tool is unable to connect to the computer to determine if the client is installed. In addition, it is likely that you are also able to deploy the client through the Client Deploy Tool if this error is encountered.

The following conditions might be causing this error message:

- An incorrect user name/password was supplied.
- The user account might be locked.
- Insufficient permissions/privileges on the target computer.
- File and Print sharing is disabled on the target computer.
- The Windows Firewall might be blocking the Client Deploy Tool.
- The Windows policy might be blocking the Client Deploy Tool. Try to add or modify the following registry value:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\
Policies\System]
"LocalAccountTokenFilterPolicy"=dword:00000001
```

- If you receive in the Client Deploy Tool an **RPC failure** message, this error occurs when:
 - The remote computer is turned off or unreachable.
 - The remote computer has the RPC service disabled or not functioning.

- The remote computer has the "file and printer sharing" option disabled.
- The remote computer is running a personal firewall that blocks the connection attempts. Or the connection attempt is blocked by a firewall in between the computer with the Client Deploy Tool and the remote computer.

Ensure that these issues are not the cause of the problem and then run the Client Deploy Tool again.



Note: After restarting the computer reporting an RPC error, in some cases the RPC error no longer occurs.



Note: As a way to test and see if RPC is listening, Microsoft has a tool named "RPC Ping" which can be downloaded from the following Microsoft article: <http://support.microsoft.com/kb/831051>.

- If you receive in the Client Deploy Tool the message "**Windows Error 0000046a: Not enough server storage is available to process this command**", this error indicates that the IRPStackSize value is set too low on the target computer resulting in not enough resources being allocated to use a local device. Increase the IRPStackSize value on the target. For more information, see the following Microsoft article: <http://support.microsoft.com/kb/106167>.

Try to deploy the client after the value was increased. If the client deployment fails with the same error message, increment the IRPStackSize value and try to deploy the client again.

Log files

Each time the Client Deploy Tool starts, a log file is created.

Client Deploy Tool log files

The log file is named **BESClientDeployTool.log** and it is located in the following directories:

Linux systems

In the **/var/opt/BESClientDeployTool** directory.

Windows systems

In the Client Deploy Tool installation directory.

You cannot disable the log file nor customize its logging level.

The maximum size that the log file can reach is 50 MB. After reaching that level, the log file restarts.

Client log files (UNIX platforms only)

For each UNIX target computer, you have two files which log the stdout and the stderr activity on the remote machine, respectively.

The log files are named `<client_ip_address>.out` for the stdout output and `<client_ip_address>.err` for the stderr output.

You can find these files in the `ClientLogs` folder located in the following directories:

Linux systems

In the `/var/opt/BESClientDeployTool` directory.

Windows systems

In the Client Deploy Tool installation directory.

You cannot disable the log files nor customize their logging level.

The maximum size that the `ClientLogs` folder can reach is 100 MB. After reaching that level, the files stop logging.

Client log files (Windows platforms only)

For each Windows target computer, you have two log files. The log files are named `<client_ip_address>_InstallerService.log` and `<client_ip_address>_ClientInstaller.log`

The first file contains information provided by the installer service, while the second file contains the verbose log of the client installer.

You can find these files in the `ClientLogs` folder located in the following directories:

Linux systems

In the `/var/opt/BESClientDeployTool` directory.

Windows systems

In the Client Deploy Tool installation directory.

Uploading the target logs to the server

To upload the Client Deploy Tool target log files to the BigFix server, perform the following steps:

1. Log in to the BigFix console.
2. Click the **Fixlets and Tasks** icon in the Domain Panel.
3. In the search bar, enter Upload Deploy.
4. Select the Task named **Upload BES Client Deploy Tool Logs**.
5. Click **Take Action**.
6. In the Applicable Computers tab, select the target computers from which you want to retrieve the Client Deploy Tool log files.
7. Click **OK**. Verify the status of the Task.

After running this Task, the log files are uploaded to the BigFix server directory

Installation_dir/UploadManagerData/BufferDir/sha1/xx/xxxxxxx

where:

xx

Represents the last two digits of the Client ID.

xxxxxxx

Represents the full Client ID.

The names of the uploaded log files use the following prefixes:

*cdtMainLog_* for the main Client Deploy Tool log file, which is *BESClientDeployTool.log*

*cdtClientLogs_* for each log file taken from the *ClientLogs* folder of the Client Deploy Tool.

The files are uploaded to the BigFix server only if their size is smaller than 50 MB, unless you specified a different limit by using the appropriate client setting.

The Task is relevant if the following conditions are satisfied:

- The **BESClientDeployTool.log** file exists in the installation directory of the Client Deploy Tool.
- The **ClientLogs** folder exists in the installation directory of the Client Deploy Tool.

These conditions are met if you started the Client Deploy Tool at least once.

Important: To clean up the Client Deploy Tool reports older than a week, you can use the task named **BES Client Deploy Tool cleanup of obsolete reports**.

Limitations in Client Deploy Tool

The Client Deploy Tool allows you to deploy BigFix clients on all the platforms supported by BigFix Version 9.5.5. In addition, you can also use the Client Deploy Tool to deploy older BigFix client versions, 9.1 and 9.2.

Known limitations

When using the Client Deploy Tool to deploy older BigFix client versions, such as 9.1 and 9.2, you can deploy on all the platforms supported by these old BigFix versions, except on the following:

- BigFix Version 9.1 agent on Solaris 9 platform.
- BigFix Version 9.1 agent on HP-UX platforms.
- BigFix Version 9.2 agent on HP-UX platforms.

Other limitations

For performance reasons, the Client Deploy Tool was tested to deploy one hundred target computers (clients) at a time.

Installing the Client on AIX

To install the client perform the following steps.

1. Download the corresponding BigFix client package file to the IBM AIX computer.
2. Copy the BESAgent to the IBM AIX computer.

3. Run the following command:

```
installp -agqYXd ./BESAgent-9.5.xxx.x.ppc_aixxx.pkg BESClient
```



Important: Starting with release IBM AIX 7.2 with Technology Level 4, the software packages of the AIX operating system are digitally signed. The installation process verifies the digital signatures of the software package and takes action based on the digital signature policy. In order to successfully install/upgrade the BigFix Client, the Digital Signature Policy must be set to 'none'.

4. Copy your action site masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (actionsite.afxm) can be found in your BES Installation folders (by default they are placed under C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client on Windows and /var/opt/BESInstallers/Client/ on Linux). If the masthead is not named actionsite.afxm, rename it to actionsite.afxm and place it on the computer at the following location: /etc/opt/BESClient/actionsite.afxm.



Note: The directory /etc/opt/BESClient/ is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at <http://servername:port/masthead/masthead.afxm> (example: <http://bes.BigFix.com:52311/masthead/masthead.afxm>).

5. Start the BigFix client by running the following command:

```
/etc/rc.d/rc2.d/SBESClientd start
```



Note:



You can install the client on Virtual I/O Server (VIOS). As a prerequisite, run the `oem_setup_env` command. The command places the user into the OEM software installation and setup environment.

AIX Fixlet Content

To get the Fixlet content for the AIX BigFix agent, subscribe your BigFix server to the appropriate Fixlet site.

To subscribe to a new Fixlet site, perform the following steps:

1. Go to a computer with the BigFix console installed.
2. Download the masthead.
3. When prompted to open or save the file, click **Open** to open the BigFix console.
4. Log into the BigFix console with your username and password.
5. After logged in, the BigFix console asks if you wish to subscribe to the Patches for AIX Fixlet site, click **OK**.
6. Type in your private key password and click **OK**.
7. After the BigFix console subscribes to the site, it starts gathering new Fixlet messages from the site.

Installing the Client on Linux

The BigFix client can always be installed by manually running the client installer on each computer.

This is a quick and effective mechanism for installing the client on a small number of computers.



Note: If the actionsite masthead with which you installed the client computer contains the fallback relay, and no other relay option is provided to the client computer using a configuration file, then ensure that the newly installed client computer can connect to the fallback relay of your environment.

Amazon Linux 2 Installation Instructions

How to install the client on Amazon Linux 2.

To install the client perform the following steps:

1. Download the corresponding BigFix client RPM file to the Amazon Linux 2 computer.
2. Install the RPM by running the command

```
rpm -ivh client_RPM_path
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (*actionsite.afxm*) can be found in your BES Installation folders (by default they are placed under C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client on Windows and /var/opt/BESInstallers/Client/ on Linux). If the masthead is not named *actionsite.afxm*, rename it to *actionsite.afxm* and place it on the computer at the following location: */etc/opt/BESClient/actionsite.afxm*.



Note: The directory */etc/opt/BESClient/* is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at

http://servername:port/masthead/masthead.afxm (example: *http://bes.BigFix.com:52311/masthead/masthead.afxm*).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```



Note:

The BigFix client installation on Amazon Linux 2 operating system can be performed also on computers having SELinux enabled. With SELinux enabled, the following SELinux settings are supported:

selinux = enforcing, policy = targeted.

Signed RPM packages

Starting from BigFix Version 9.5.9, RPM packages are signed with a PGP key. For more details, see [Red Hat Installation Instructions \(on page 253\)](#).

CentOS Installation Instructions

To install the client perform the following steps.

1. Download the corresponding BigFix client RPM file to the CentOS computer.
2. Install the RPM by running the command

```
rpm -ivh client_RPM_path
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```



Note:



The BigFix client and relay installation on a CentOS Version 6 and 7 operating system can be performed also on computers having SELinux enabled. With SELinux enabled, the following SELinux settings are supported:

selinux = enforcing, policy = targeted.

Signed RPM packages

Starting from BigFix Version 9.5.9, RPM packages are signed with a PGP key. For more details, see [Red Hat Installation Instructions \(on page 253\)](#).

Oracle Linux Installation Instructions

How to install the client on Oracle Linux.

To install the client perform the following steps:

1. Download the corresponding BigFix client RPM file to the Oracle Linux computer.
2. Install the RPM by running the command

```
rpm -ivh client_RPM_path
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at

`http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```

**Note:**

The BigFix client installation on Oracle Linux operating system can be performed also on computers having SELinux enabled. With SELinux enabled, the following SELinux settings are supported:

selinux = enforcing, policy = targeted.

Signed RPM packages

Starting from BigFix Version 9.5.9, RPM packages are signed with a PGP key. For more details, see [Red Hat Installation Instructions \(on page 253\)](#).

Raspbian Installation Instructions

How to install the client on Raspbian.

Perform the following steps:

1. Download the corresponding BigFix client Raspbian package file to the Raspberry PI client.
2. Install the package by running the command:

```
dpkg -i client_package_path
```

3. Copy your actionsite masthead to the client (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the client at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server can be downloaded from `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```

Red Hat Installation Instructions

How to install the client on Red Hat.

Before installing the client on Red Hat Enterprise Linux™ 6 or 7, ensure that you have disabled the SELinux process or, if you want to keep SELinux enabled, that the following settings are configured:

selinux = enforcing, policy = targeted.

Before installing the client on Red Hat Enterprise Linux™ 8 or later, instead, you must disable the SELinux process.

Then, ensure that you have:

- Installed the Athena library (libXaw package) that is used by the user interface component of the client.

To install the client perform the following steps:

1. Download the corresponding BigFix client RPM file to the Red Hat computer.
2. Install the RPM by running the command

```
rpm -ivh client_RPM_path
```



Note:



Starting from BigFix Version 9.5.9, if you are installing the signed packages and you have not imported the public key for that signature, you receive the following warning:

```
BESAgent-9.5.9.xx-rhe6.x86_64.rpm: Header V3 RSA/SHA256
Signature, key ID 3e83b424: NOKEY
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client on Windows™` and `/var/opt/BESInstallers/Client/` on Linux™). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix Server can be downloaded at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```



Note: On Red Hat Enterprise Linux™ 9, the user interface component of the client is displayed only if you log in choosing GNOME on Xorg.

Signed Client Red Hat RPM packages

Starting from BigFix Version 9.5.9, the Red Hat RPM packages are signed with a PGP key.

The RPM packages available for download are stored, divided by product version and platform, in the following repository: <http://support.bigfix.com/bes/release/>.

Run the following command to check if the package file is signed:

```
rpm -qpi <package>.rpm
```

In the command output the content of the Signature field shows if the package is signed or not:

- The package is signed if the Signature field is not empty.
- The package is not signed if the Signature field does not contain any value.

This is a sample output that you can get if the package is signed:

```
Name: BESAgent
Version      : 9.5.9.xx
Release      : rhe6
Architecture: x86_64
Install Date: Mon 05 Mar 2018 11:31:15 AM CET
Group        : Applications/Security
Size         : 52968659
License      : (c) Copyright IBM Corp. 2001-2018.
              (c) Copyright HCL Technologies Limited 2018 ALL RIGHTS
              RESERVED
Signature    : RSA/SHA256, Fri 02 Mar 2018 12:50:16 AM CET,
              Key ID 19d621d73e83b424
Source RPM   : BESAgent-9.5.9.24-rhe6.src.rpm
Build Date   : Thu 01 Mar 2018 09:44:58 PM CET
Build Host   : rhel6x64bs
Relocations  : (not relocatable)
Packager      : IBM Corp. and HCL Technologies Limited
Vendor        : IBM Corp. and HCL Technologies Limited
URL           : http://www.bigfix.com/
Summary       : BigFix Agent
Description   : BigFix Agent for Linux
```


If the package is signed:

If you are using Version 9.5.9, you can manually download and import the public key for that signature from the following web site: <http://support.bigfix.com/bes/release/9.5/patch9/>

If you are using Version 9.5.10, you can download and import the public key for that signature by running the BES Support Fixlet named **Import BigFix version 9.5 public GPG key for RedHat RPMs**.

If you download the key, then import it into your local machine keystore by using the command:

```
rpm --import <keyfile>
```

where the key file can be a URL or a local file.

The BigFix public key available for download is stored in the following repository: <http://support.bigfix.com/bes/release/>

At this point, you can proceed to install the RPM package on the client system by running the command:

```
'rpm -i <package name>'
```

or an equivalent command.

If you did not import the public key, during the client installation you might see a warning message saying that the signature cannot be verified. This message does not prevent your RPM package from being installed successfully on the client system.

Red Hat Fixlet Content

To get the Patch content for the Red Hat BigFix agent, you need to subscribe your BigFix server to the appropriate Patch site.

To subscribe to a new Patch site, perform the following steps:

1. From the BigFix Management domain, click License Overview dashboard.
2. Scroll down to view the available content sites.

3. Click **Enable** to select the version of Patches for RHEL site to which you want to subscribe.
4. Open the Manage Sites node and select your newly subscribed site. From the site dialog, click the Computer Subscriptions tab to assign the site to the appropriate computers.
5. From the Operator Permissions tab, select the operators that you want to associate with this site and their level of permission.
6. Click **Save Changes**.

You are now subscribed to a Patches for RHEL site. For more information on patching your endpoints, see [Patch for Red Hat Enterprise Linux](#).

SUSE Linux Enterprise (64-bit) Installation Instructions

Prerequisites

On SUSE Linux Enterprise Server (SLES) 11 ppc64, install the `rpm-32bit-*` package. Download the latest version of the package from the [SUSE website](#).

On SUSE Linux Enterprise Server (SLES) 15 x86_64, install the `insserv-compat` rpm package before installing the client.

To install the client, do the following steps:

1. Disable the SELinux process.
2. Download the corresponding BigFix client RPM file to the SUSE computer.
3. Install the RPM by running the command

```
rpm -ivh client_RPM_path
```

4. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

5. Start the BigFix client by running the following command:

```
/etc/init.d/besclient start
```

Ubuntu/Debian (32-bit) Installation Instructions

To install the client perform the following steps:

1. Download the corresponding BigFix client DEB package file to the Ubuntu Debian computer.
2. Install the DEB by running the command

```
dpkg -i client_package_path
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```

Ubuntu/Debian (64-bit) Installation Instructions

To install the client perform the following steps:

1. Download the corresponding BigFix client DEB package file to the Ubuntu/Debian computer.
2. Install the DEB by running the command

```
dpkg -i client_ package_path
```

3. Copy your actionsite masthead to the client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BES Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers \Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`.



Note: The directory `/etc/opt/BESClient/` is not automatically created by the installer. If it does not exist, create it manually.

The masthead file for each BigFix server is downloadable at

`http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).

4. Start the BigFix client by running the command:

```
/etc/init.d/besclient start
```

Installing the Client on Mac

To install the Mac client perform the following steps:

1. Download the corresponding BigFix client package file to the Mac computer.
2. Copy the PKG file to any directory and copy the masthead file for your deployment into the same directory. Ensure that the masthead file is named `actionsite.afxm`.
3. You might optionally include a pre-defined settings file (`clientsettings.cfg`) in the same directory as the PKG file and the `actionsite.afxm` file, to create custom settings for the Mac client at installation time, for example to assign the new Client to a specific parent relay. For more information, see [Mac Clients \(on page 366\)](#).



Note: If you previously uninstalled a BigFix Client on the same Mac system, and you plan to reinstall it using the `clientsettings.cfg` file, ensure to reboot the system before starting the Client installation.

4. Launch the PKG installer by double-clicking the PKG file (such as `BESAgent-9.5.xxx.x-BigFix_MacOSXxx.x.pkg`) and run through the installer. The agent starts up after the installation completes as long as the masthead file is included in the installation directory.



Note:

- The agent uninstaller is available in the .pkg install. It is located in: `/Library/BESAgent/BESAgent.app/Contents/MacOS/BESAgentUninstaller.sh`
- The agent .dmg package is no longer available.



Note: Starting from macOS 10.15 or later, the BESAgent service can access the user's private files and folders in the Mac system only if you add full disk access permission to it. It can be done manually by the user from the **Privacy** tab of the **Security & Privacy Preferences** panel or by using MDM services.

Mac Fixlet Content

To get the Fixlet content for the Mac BigFix agent, subscribe your BigFix server to the appropriate Fixlet site.

To subscribe to a new Fixlet site, perform the following steps:

1. Go to a computer with the BigFix console installed.
2. Download the masthead.
3. When prompted to open or save the file, click **Open** to open the BigFix console.
4. Log into the BigFix console with your username and password.
5. After logged in, the BigFix console asks if you wish to subscribe to the Patches for Mac OS X Fixlet site, click **OK**.
6. Type in your private key password and click **OK**.
7. After the BigFix console subscribes to the site, it starts gathering new Fixlet messages from the site.

Installing the Client on Solaris 10



Important:

In a Solaris zones environment, consider that non-global zones are entities separated from the global one. For example, if you set up two non-global zones, you will see three instances of the client computers in the BigFix console. Because the BigFix client is identified by the host name, ensure that you use descriptive unique host names when creating the zones.

Install the BigFix client first in the global zone. Depending on the Solaris OS version, the client could be automatically installed also in the managed non-global zones. Verify and install the client in the non-global zones, if required.

In any case, you must save the masthead `actionsite.afxm` file in the `/etc/opt/BESClient/` directory of all Solaris zones with the BigFix client installed.

To install the client, perform the following steps:

1. Download the corresponding BigFix client package file to the Solaris computer.
2. Copy your actionsite masthead to the Solaris BigFix client computer (the masthead contains configuration, license, and security information). The action site masthead

(`actionsite.afxm`) can be found in your BigFix Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client` on Windows and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`. The masthead file for any BigFix server can also be downloaded at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).



Note: You might need to create the directory `/etc/opt/BESClient/` if it does not already exist.

3. Install the PKG by running the command:

```
pkgadd -d <path to BigFix Client package file>
```

4. The BigFix Client is started automatically by the Service Manager, on older versions run the command:

```
/etc/init.d/besclient start
```



Note:

To install the BigFix client in the local zone, after you have copied the masthead into the `/etc/opt/BESClient/` local zone folder, ensure that the `svcs BESClient` service is online in the local zone by completing the following steps:

1. Check the status of the `BESClient` service:

```
svcs -x BESClient
```

If it is online, no additional action is needed.

2. If the service is in maintenance, stop the `BESClient`:

```
/etc/init.d/besclient stop
```

3. Enable the `BESClient` svc service:



```
svcadm clear BESClient
```

4. Check if the service is online and that the client is started:

```
svcs -x BESClient
```

```
svcs -p BESClient
```



Warning: All Solaris agents must have package SUNWlibC installed.

Solaris Fixlet Content

1. To get the Fixlet content for the Solaris BES Agent, you will need to subscribe your BigFix Server to the appropriate Fixlet site. To subscribe to a new Fixlet site, go to a computer with the BigFix console installed.
2. Download the [Solaris Evaluation masthead](#).
3. When prompted to open or save the file, click "Open" and this will automatically open the BigFix console.
4. Log into the BigFix console with your username/password.
5. Once logged in, the BigFix console asks if you wish to subscribe to the Patches for Solaris Fixlet site, click **OK**.
6. Type in your private key password and click **OK**.
7. After the BigFix console subscribes to the site, it should automatically start gathering new Fixlet messages from the site.

Installing the Client on Solaris 11

As a prerequisite, all Solaris agents must have the SUNWlibC package installed.



Important:



If you install the BigFix client on **Solaris 10** follow the procedure described in the topic [Installing the Client on Solaris 10 \(on page 261\)](#).

If you install the BigFix client on **Solaris 11**, depending on the BigFix client level, you have different options:

BigFix Version 9.5.12 or older

Install using the procedure described in [Installing the Client on Solaris 10 \(on page 261\)](#)

BigFix Version 9.5.13 or later

You can decide if you want to install the client using the procedure described in [Installing the Client on Solaris 10 \(on page 261\)](#) or install the client using the **.p5p** format using the procedure described in this topic.

Starting from BigFix Version 9.5.13, you can install the **Solaris 11** client using a **.p5p** client package format by performing the following steps:

1. Download the corresponding BigFix client package file to the Solaris computer.
2. Copy your actionsite masthead to the Solaris BigFix client computer (the masthead contains configuration, license, and security information). The action site masthead (`actionsite.afxm`) can be found in your BigFix Installation folders (by default they are placed under `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client on Windows` and `/var/opt/BESInstallers/Client/` on Linux). If the masthead is not named `actionsite.afxm`, rename it to `actionsite.afxm` and place it on the computer at the following location: `/etc/opt/BESClient/actionsite.afxm`. The masthead file for any BigFix server can also be downloaded at `http://servername:port/masthead/masthead.afxm` (example: `http://bes.BigFix.com:52311/masthead/masthead.afxm`).



Note: You might need to create the directory `/etc/opt/BESClient/` if it does not already exist.

- Before installing the **.p5p** client package, as upgrading from the old SVR4 packages is not supported, ensure that no previous agent is already installed by running the command:

```
pkginfo BESagent
```

If necessary, remove the old BigFix agent before installing the new one with the command:

```
pkgrm BESagent
```

- If the computer is **not a global zone** or is a **global zone without children**, you can directly install the new agent (**.p5p** client package) by running the command:

```
pkg install -g <path to package file>/BESAgent-<...>.p5p BESagent
```

- Otherwise, if the computer is a **global zone with children**, you must create a permanent repository and set the publisher, for example by running the command:

```
pkgrepo create /var/opt/BESclient_solaris_repo
pkgrecv -s <path to package file>/BESAgent-<...>.p5p
  -d /var/opt/BESclient_solaris_repo BESagent
pkg set-publisher --search-first -p /var/opt/BESclient_solaris_repo
```

Then, you can install with the command:

```
pkg install BESagent
```

The **--search-first** option is needed to avoid that other, not available, publishers might cause issues.

The created repository is also available for the children. Therefore, there is no need to create it on the non-global zones.



Note: You can install on the children using the **-r** option. For details about the **-r** option and other command options, see https://docs.oracle.com/cd/E36784_01/html/E36870/pkg-1.html

Uninstalling the client

To uninstall the client, installed using a **.p5p** client package format, run the command:

```
pkg uninstall BESagent
```

This command can be used for uninstalling both on a global zone or on the local zones.



Note: You can uninstall on the children using the **-r** option. For details about the **-r** option and other command options, see https://docs.oracle.com/cd/E36784_01/html/E36870/pkg-1.html

Upgrading the client

Upgrading manually from a client installed using the old SVR4 package to a new client with the **.p5p** client package is not supported.

You can upgrade the Solaris 11 client by running the Fixlet named **Updated Solaris Client - BigFix version 9.5.X Now Available!**

Troubleshooting the upgrade

When upgrading the BigFix Client on an Oracle Solaris 11 local zone using the IPS package, the action might fail, with the `/tmp/BESClientUpgradeFixlet.log` file on the local zone showing the following error message:

```
Cannot enable or disable a system publisher
```

The error might be due to a corruption of the BigFix publisher in the Oracle Solaris zone environment.

The `pkg publisher` command executed on the global zone does not show any BigFix publisher, while executed on the local zones shows the status `disabled,syspub`.

As a workaround to solve this issue, try one of the following options:

- If not already done, submit the **Updated Solaris Client - BigFix version 9.5.14 Now Available!** Fixlet to the global zone. Wait for the action to complete.

Only when the action completes, submit the same Fixlet to the local zone(s).

- On the global zone, run the command:

```
pkg set-publisher --enable BigFix
```

Check the publisher on the local zone(s) to verify if the "disabled" status is no longer shown.

Try upgrading the local zone(s) again.

- Uninstall and reinstall the client on the local zone(s).

Troubleshooting the uninstallation

After running the `pkg uninstall BESagent` command, you might receive the following error message:

```
DESC: A service failed - a method is failing in a retryable manner but too
      often.
AUTO-RESPONSE: The service has been placed into the maintenance state.
IMPACT: svc:/BESclient:default is unavailable.
```

Despite the error message, the client is correctly uninstalled. You can ignore it.

Known limitations

Limitation 1

The Image Packaging System (IPS) does not support product directories symbolically linked. When using symbolic links, the package installation fails with the following error message:

```
pkg: Requested operation failed for package
     pkg://software.bigfix.com/BESagent@.....
Cannot install '.....'; parent directory ..... is a link to .....
To continue, move the directory to its original location and try again.
```

Limitation 2

Uninstalling the IPS package moves the files added after the installation under

`$IMAGE_META/lost+found`

Where the default value for IMAGE_META is `/var/pkg`

As a side effect, a subsequent installation of the agent will result as a new one (different ID, lost cache), unless you manually restore the files from `$IMAGE_META/lost+found` to `/var/opt/BESClient` before you perform the new installation.

ESX Fixlet Content

To get the Fixlet content for the ESX BigFix agent, subscribe your BigFix server to the appropriate Fixlet site.

To subscribe to a new Fixlet site, perform the following steps:

1. Go to a computer with the BigFix console installed.
2. Download the masthead.
3. When prompted to open or save the file, click **Open** to open the BigFix console.
4. Log into the BigFix console with your username and password.
5. After you logged in, the BigFix console asks if you wish to subscribe to the Patches for ESX Fixlet site, click **OK**.
6. Type your private key password and click **OK**.

After the BigFix console subscribes to the site, it starts gathering new Fixlet messages from the site.



Note: Ensure that the firewall ports are opened.

Installing the Client on Windows

You can install the BigFix client manually by running the Client installer on each computer.

Use this method to install the client on a small number of computers and if you installed the BigFix server on a Windows system. Run this sequence of steps to run the client installation:

1. You can install the client using one of the following methods:
 - Log on to the computer with administrator privileges and copy the **BES Installers\Client** folder from the installation computer to the local hard drive.
 - Run the Installation Guide (available at **Start > Programs > BigFix > BigFix Installation Guide**) and click the button marked **Browse Install Folders** to open the **BigFix Installers** folder and display the **Client** folder.
2. You might optionally include a pre-defined settings file (`clientsettings.cfg`) in the same directory as the `setup.exe` file, to create custom settings for the Windows client at installation time, for example to assign the new Client to a specific parent relay. For more information, see [Windows Clients \(on page 366\)](#).
3. After you have copied the Client folder to the target computer, double-click **setup.exe** from that folder to launch the installer.
4. After the welcome panel, you are prompted for a location to install the software. You can accept the default or click **Browse** to select a different location.
5. After the files have been moved, click **Done** to exit the installer. The BigFix Client application is now installed and will automatically begin working in the background. Repeat this process on every computer in your network that you want to place under BigFix administration.

Installing the Client using the .exe setup

You can download the BigFix Client setup in EXE format directly from <https://support.bigfix.com/bes/release/>

The BigFix Client installer .exe is also shipped with:

- The BigFix Installation Generator for Windows, which places it in the folder **C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client**
- The BigFix Server installer for Red Hat Enterprise Linux, inside the .tgz archive folder **ServerInstaller_10.0.0.133-rhe6.x86_64/repos**

To install the BigFix Client, you also need the masthead file. You can find it on the computer where you installed the BigFix Server:

- On Windows, it is named masthead.afxm and stored in the folder `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client`
- On Linux, it is named actionsite.afxm and stored in the folder `/var/opt/BESInstallers/Client`

If you already installed the BigFix Installation Generator (Windows-only), you can run the Installation Guide (available at Start > Programs > BigFix > BigFix Installation Guide), click **Browse Install Folders** and copy the Client installer folder, which contains both the Client setup and the masthead file.

Now, you are ready to perform the following steps:

1. You might optionally include a pre-defined settings file (`clientsettings.cfg`) in the same directory as the `setup.exe` file, to create custom settings for the Windows client at installation time, for example to assign the new Client to a specific parent relay. For more information, see [Windows Clients \(on page 366\)](#).
2. After you have copied the Client folder to the target computer, double-click **setup.exe** from that folder to launch the installer.
3. After the welcome panel, you are prompted for a location to install the software. You can accept the default or click **Browse** to select a different location.
4. After the files have been moved, click **Done** to exit the installer. The BigFix Client application is now installed and will automatically begin working in the background. Repeat this process on every computer in your network that you want to place under BigFix administration.

Via the command line

The BigFix client installer `setup.exe` is an MSI-based setup created with InstallShield.

The `.exe` file can be run silently as described in [Running Installations in Silent Mode](#). The `/v"..."` part of the command line contains the options and properties that are passed to the underlying MSI engine. A list of standard command line options for the Windows Installer is available at <https://docs.microsoft.com/en-us/windows/win32/msi/command-line-options>.

To perform a silent Client installation, follow these steps:

```
setup.exe /s /v"/L*vx! \"C:\ClientInstallLog.txt\" SETUPEXE=1
REBOOT=ReallySuppress MSIRESTARTMANAGERCONTROL=Disable /qn"
```

To log some more information specific to the InstallShield .exe wrapper:

```
setup.exe /s /debuglog"C:\ClientInstallLogIS.txt" /v"/L*vx!
\"C:\ClientInstallLog.txt\" SETUPEXE=1 REBOOT=ReallySuppress
MSIRESTARTMANAGERCONTROL=Disable /qn"
```

To change the default installation location, the appropriate form of the command is:

```
setup.exe /s /v"/L*vx! \"C:\ClientInstallLog.txt\" INSTALLDIR=
\"PathToInstallationFolder\" SETUPEXE=1 REBOOT=ReallySuppress
MSIRESTARTMANAGERCONTROL=Disable /qn"
```

Where "PathToInstallationFolder" is the full windows path to the folder where the Client is to be installed.

If you do not want the setup to start the BES Client service at the end of the installation, add STARTAGENTSERVICE=0 in the /v"..." part of the command.



Note: The Windows user running setup.exe must have Administrative privileges on the computer, must be able to write to the folder that contains the "setup.exe" and to the chosen log location, otherwise the installation might fail and create no log.

Installing the Client using the .msi setup

You can install the BigFix Client silently using either the .exe setup or the .msi setup.

To get the BigFix Client installer in MSI format, proceed as follows.

On Windows:

1. Download the BigFix Installation Generator from <https://support.bigfix.com/bes/release/>
2. Run the Installation Generator on a Windows machine
3. Search in the folder **C:\Program Files (x86)\BigFix Enterprise\BES Installers\ClientMSI**

On Linux:

1. Download the BigFix Server installer for RHEL from <https://support.bigfix.com/bes/release/>
2. Extract the .tgz archive
3. Search in the folder `ServerInstaller_10.0.0.133-rhe6.x86_64/repos/ClientMSI-10.0.0.133`

In that folder, you will find:

- BESClientSetupMSI.exe, a tool to customize the .msi (optional)
- BigFixAgent.msi, the main setup file (required)
- 1028.mst, ..., 2052.mst, the translation files for the setup (required)

To install the BigFix Client, you also need the masthead file. You can find it on the computer where you installed the BigFix Server:

- On Windows, it is named masthead.afxm and stored in the folder `C:\Program Files (x86)\BigFix Enterprise\BES Installers\Client`
- On Linux, it is named actionsite.afxm and stored in the folder `/var/opt/BESInstallers/Client`

Via the command line

To perform a silent Client installation, follow these steps:

1. Copy BigFixAgent.msi setup, its .mst files and the actionsite.afxm masthead file to a folder of your target computer, for instance `C:\ClientMSI`.
2. Run the BigFixAgent.msi setup.

You can run the .msi from the command line like this:

```
msiexec.exe /i BigFixAgent.msi /L*vx! "PathToLogFile"
INSTALLDIR="PathToInstallationFolder" TRANSFORMS=1033.mst
REBOOT=ReallySuppress MSIRESTARTMANAGERCONTROL=Disable /qn
```

L*vx! "PathToLogFile" are the logging options followed by a custom file path for the log file.

INSTALLDIR is a property to specify the installation folder. You can omit it to install the client in the default folder.

TRANSFORMS=transform.mst is a property to specify the transform file(s) to apply to the setup. Each .mst file contains a translation for the setup. For more information on this property, see <https://docs.microsoft.com/en-us/windows/win32/msi/transforms>.

The following table describes the supplied transform files, listed by language.

Language	Transform File name
U.S. English	1033.mst
German	1031.mst
French	1036.mst
Spanish	1034.mst
Italian	1040.mst
Brazilian Portuguese	1046.mst
Japanese	1041.mst
Korean	1042.mst
Simplified Chinese	2052.mst
Traditional Chinese	1028.mst

REBOOT=ReallySuppress and MSIRESTARTMANAGERCONTROL=Disable are properties set to avoid rebooting the system after the installation.

/qn is an option performs a silent installation. You can omit it to run the installation interactively.

This example shows how to silently install the BigFix client in the default folder in the English language:

```
msiexec.exe /i "BigFixAgent.msi" TRANSFORMS="1033.mst"  
REBOOT=ReallySuppress MSIRESTARTMANAGERCONTROL=Disable /qn
```

For more information on the command line options for the MSI engine, see <https://docs.microsoft.com/en-us/windows/win32/msi/command-line-options>.

If you do not want the setup to start the BES Client service at the end of the installation, add STARTAGENTSERVICE=0 to your command.

Using Group Policies

You can, using Active Directory Group Policy Objects (GPO), define a policy requiring that the Client is installed on every machine in a particular group (Organizational Unit, Domain, and so on).

This policy is applied every time a user logs in to the specified domain, making it a very effective way to deploy the client if GPO is enabled. For more details consult your Active Directory administrator.

For more details about Group Policy Objects (GPO), see [Using GPO to deploy the BigFix Client](#).

BES Client MSI Editing Tool

Use the BESClientSetupMSI.exe tool to update the BigFix Client Microsoft Installer (MSI) with a masthead file that might have been updated outside of the normal upgrade cycle.

This tool includes that masthead into the client MSI package (BigFixAgent.msi) enabling the client to know to which server to connect.

You can use the following arguments when running the tool:

- `<path_to_masthead_file>` which is a required command-line argument.
- `<path_to_MSI>` which represents the path to the MSI file to update. This is a required command-line argument.
- `"/silent"` which is an optional command-line argument that you can specify to prevent pop-up error message windows from being displayed in case of failure.



Note: The tool uses relative and absolute paths. However, the UI does not replace relative paths with absolute paths in the message box that displays if you are not in silent mode.



Note: If you want to use the latest Actionsite.afxm masthead file, you can locate it under `C:\Program Files (x86)\BigFix Enterprise\BES Client`.

The tool returns:

- A non-zero exit code in case of failure.
- Zero if the MSI was updated successfully.

Sample calls:

Displays usage information:

```
BESClientSetupMSI.exe
```

Updates the BigFixAgent.msi file with a copy of the masthead data contained in masthead.afxm:

```
BESClientSetupMSI.exe masthead.afxm BigFixAgent.msi
```

Updates the BigFixAgent.msi file with a copy of the masthead data contained in masthead.afxm without displaying the success or failure messages:

```
BESClientSetupMSI.exe masthead.afxm BigFixAgent.msi /silent
```

Embedding in a Common Build

If your organization employs a specific build image or common operating environment (COE) on a CD or image that is used to prepare new computers, you can include the Client in this build.

To create the image, follow these steps:

For Windows operating systems

1. Install the client on the computer to be imaged. The BigFix client immediately attempts to connect to the server. If it successfully connects to the server, it is assigned a **ComputerID**. This ComputerID is unique to that particular computer, so it should *not* be part of a common build image. The next steps delete this ID.
2. Stop the client by opening the Windows Services dialog and stopping the **BES Client service**.
3. Delete the computer-specific identifier (computer ID) by opening the registry to `HKLM\Software\Wow6432Node\BigFix\EnterpriseClient\GlobalOptions` and deleting the values `ComputerID`, `RegCount`, and `ReportSequenceNumber`.
4. Delete the `__BESData` folder from the installation directory of the BigFix client.

The BigFix Client is now ready to be imaged.



Note: If the Client is started again for any reason (*including a system restart*), it re-registers with the server and **you will need to perform steps 2 to 3 again**. The Server has built-in conflict detection and resolution so if for any reason you fail to delete the ID, the Server can detect that there are multiple Clients with the same ComputerID and forces the Client to re-register to ensure that everything works normally. However, it is advisable to perform the steps above to avoid having a grayed-out Client (the first imaged computer) in the computer list in the Console.

For more information, see [Avoiding duplicates when a Client is restored \(on page 277\)](#).

For Linux operating systems

1. Install the client on the computer to be imaged.
2. Stop the client by running `/etc/init/besclient stop`.
3. Delete the computer-specific identifier from the `.config` file to prevent all copies of the machine from registering with the same client ID to the server.
4. Delete the `__BESData` folder. The default location is `/var/opt/BESClient`.

The BigFix Client is now ready to be imaged.

For more information, see [Avoiding duplicates when a Client is restored \(on page 277\)](#).

For Macintosh operating systems

1. Install the client on the computer to be imaged.
2. Stop the client by using `sudo "/Library/BESAgent/BESAgent.app/Contents/MacOS/BESAgentControlPanel.sh" -stop`.
3. Delete the computer-specific identifier to prevent all copies of the machine from registering with the same client ID to the server.
 - If they exist, remove **RegCount**, **ReportSequenceNumber**, and **ComputerID** from the client preferences folder: `/Library/Preferences/com.bigfix.besagent.plist`.
 - Delete the `__BESData` folder. The default location is `\Library\Application Support\BigFix\BES Agent`.

The BigFix Client is now ready to be imaged.

For more information, see [Avoiding duplicates when a Client is restored \(on page 277\)](#).

Avoiding duplicates when a Client is restored

When the BigFix client is rolled back or restored from a snapshot, the next time it registers itself with the BigFix server, it receives a new Computer ID. The BigFix client with the old Computer ID becomes inactive because it does not report with the same Computer ID. As a

result, the BigFix console shows duplicated entries for the same computer. Additionally, the affected computer loses all information: action history, discovery, and so on.

To avoid this situation, you must store some registry keys and data aside of the computer whose identity you want to preserve.

1. Stop the BigFix client service.
2. Store the following data.
 - a. The registry key value for the ComputerID from the following location.
 - Windows: `HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\BigFix\EnterpriseClient\GlobalOptions`
 - Linux: `/var/opt/BESClient/besclient.config` under the section `Software\BigFix\EnterpriseClient\GlobalOptions`
 - MacOS: `/Library/Preferences/com.bigfix.BESAgent.plist`
 - b. The `BES Client\KeyStorage` folder from the default installation directory of the BigFix client.

Procedure to keep the client identity

1. The BigFix server can match the data that is stored aside to the BigFix client that is reinstalled or reverted from a snapshot when the **ClientIdentityMatch** parameter of the BigFix server is set to 100. By default, the parameter is set to 0. To change the value of the parameter, go to the computer on which the BigFix server is installed and perform the following steps:
 - a. Windows: Go to **Start > BigFix Administrative Tool > Advanced Options** and set the value of the ClientIdentityMatch parameter to 100.
 - b. Linux: Run the following command.

```
./BESAdmin.sh -setadvancedoptions  
-sitePvkLocation=/root/backup/license.pvk  
-sitePvkPassword=pippo000 -update clientIdentityMatch=100
```

2. Ensure that you complete this action before you install the BigFix client on the computer whose identity you want to preserve.

3. Install the BigFix client on the computer whose identity you want to preserve. After the installation of the BigFix client completes, the computer automatically registers with the BigFix server and receives a unique Computer ID.
4. Stop the BigFix client.
5. Move to the following location:
 - Windows: `HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\BigFix\EnterpriseClient\GlobalOptions`
 - Linux: `/var/opt/BESClient/besclient.config` under the section `[Software\BigFix\EnterpriseClient\GlobalOptions]`
 - MacOS: `/Library/Preferences/com.bigfix.BESAgent.plist`
 and remove the values for the following parameters:
 - `RegCount`
 - `ComputerID`
 - `ReportSequenceNumber`
6. Delete the `__BESData` and `KeyStorage` folders from the installation directory of the BigFix client.
7. Restore the previously stored `ComputerID` and `KeyStorage`.
8. Start the BigFix client.

Enabling encryption on Clients

When installed, you can set up your Clients to encrypt all outgoing reports to protect data such as credit card numbers, passwords, and other sensitive information.



Note: You must have encryption enabled for your deployment before enabling it for your Clients. In particular, for the required option, your clients will become silent if you enable them without first setting up your deployment.

To enable encryption, follow these steps:

1. Open the BigFix Console.
2. From the **BigFix Management** Domain, open the **Computer Management** folder and click the **Computers** node.

3. Select the computer or set of computers that you want to employ encryption for.
4. From the right-click context menu, select **Edit Computer Settings**.
5. From the **Edit Settings** dialog, click **Add**.
6. In the **Add Custom Setting** dialog, enter the setting name as

_BESClient_Report_Encryption (note the underline starting the name).

There are three possible values for this setting:

required

Causes the Client to always encrypt. If there is no encryption certificate available in the masthead or if the target computer (Relay or Server) cannot accept encryption, the Client will not send reports.

optional

The Client encrypts if it can, otherwise it sends its reports in clear-text.

none

No encryption is done, even if an encryption certificate is present. This allows you to turn off encryption after you enable it.

7. Click **OK** to accept the value and **OK** again to complete the setting. You must enter your private key password to deploy the setting action.

For additional information about encryption, see [Encryption \(on page 285\)](#).

Chapter 11. BigFix Administration Tool

The BigFix Administration Tool, also called BESAdmin, is the tool we use to perform configuration changes and maintenance operations.

On Windows, it has both a GUI (graphical user interface) and a CLI (command line interface). On Linux, it only has a CLI.

BESAdmin Windows GUI

The Installer automatically creates the BigFix Administration Tool when it installs the other components of the Console program.

This program operates independently of the Console and is intended for Administrative Operators only. You can find it from the Start menu: **Start > All Programs > BigFix > BigFix Administration Tool**. To run the program, you must first browse to the private key (license.pvk).

You can also change your administrative password through this interface. After you have selected the private key file, click **OK** to continue. You must supply your private key password to proceed.




Note: When you change the private key password you change only the password of the local file; the other DSA BigFix servers are not updated. They continue to use their own license file and password unless it is replaced from the changed license file.

Use the BigFix console to perform the user management tasks.

Masthead Management

Click the first tab to view the **Masthead Management** dialog.

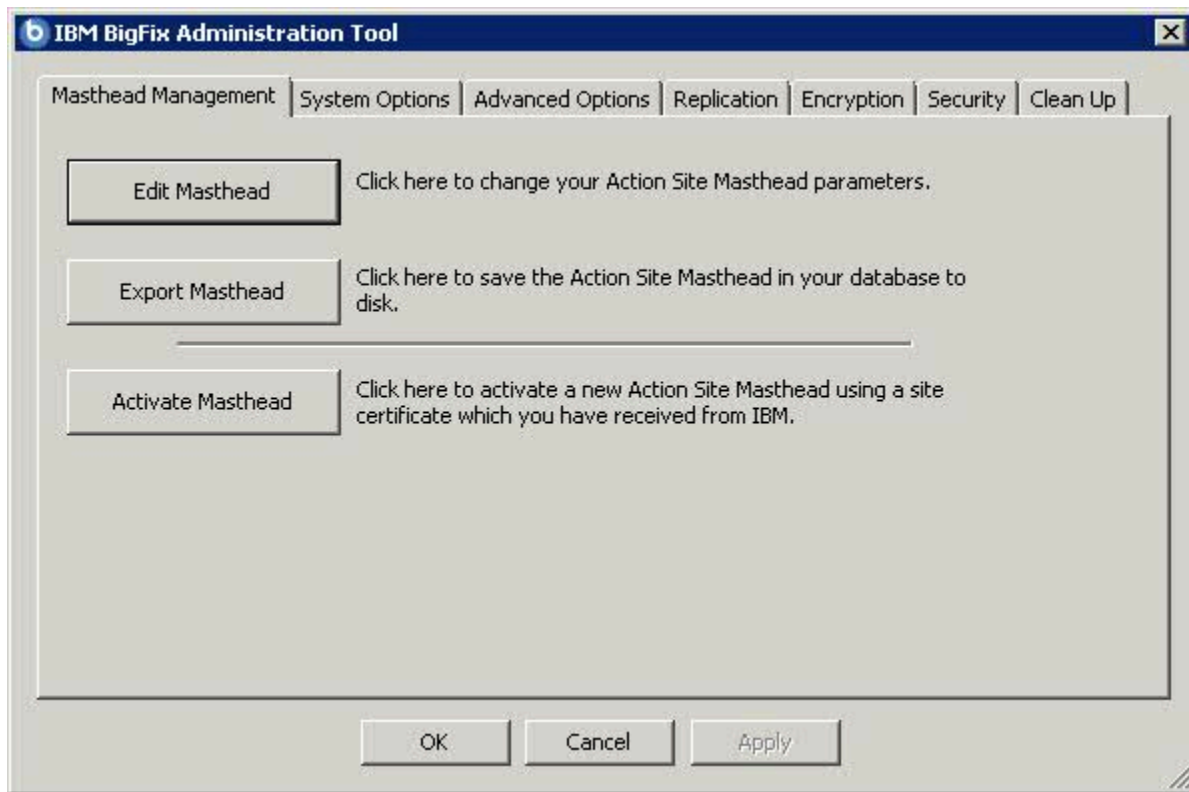


If you do not yet have a masthead, which is required to run the Console, this dialog provides an interface to **Request** and subsequently **Activate** a new masthead. If you have an existing masthead, you can edit it to change gathering intervals and locking. You can also export your masthead, which can be useful if you want to extend your BigFix network to other servers.

System Options

The second tab opens the **System Options** dialog.

The first option sets a baseline minimum for refresh intervals. This refers to the Fixlet list refresh period specified in the Preferences dialog of the Console. The default period is 15 seconds, but if your network can handle the bandwidth, you can lower this number to make the Console more responsive. Conversely, if your network is strained, you might want to increase this minimum.

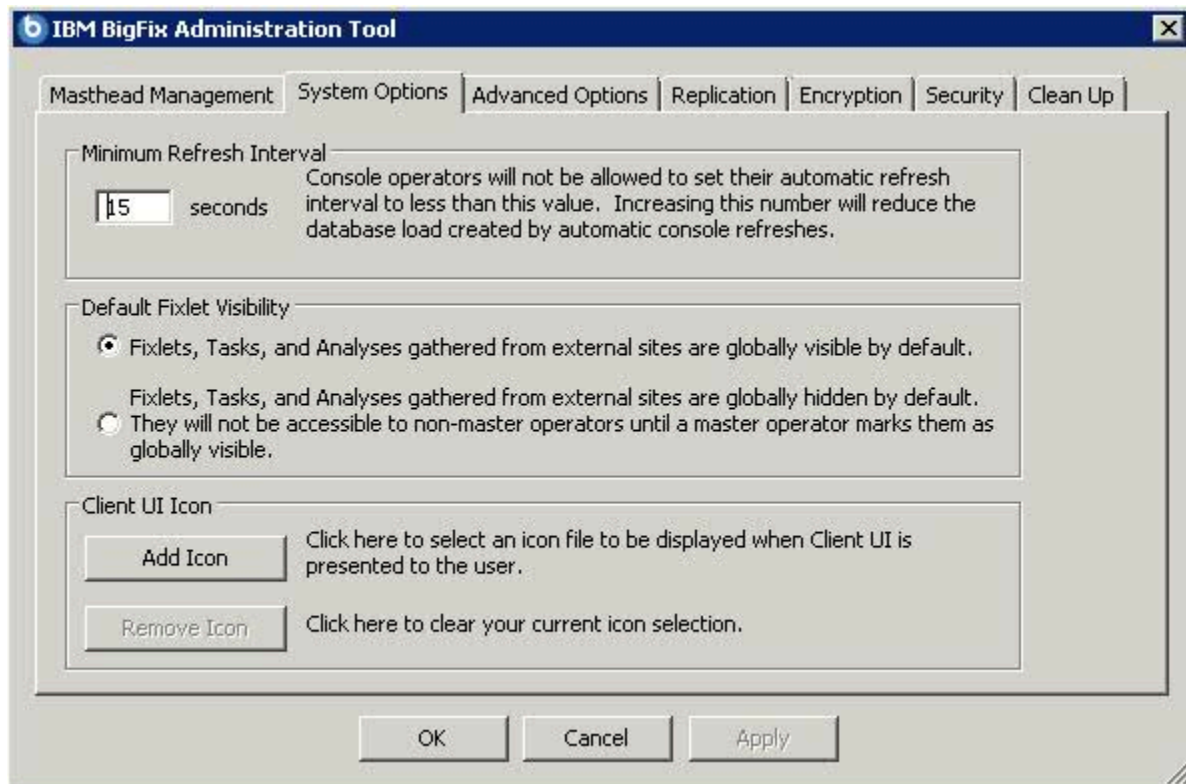


Use this dialog to set the default visibility of external sites. These sites are, by default, globally visible to all Console operators. To give you extra control, you can set the visibility to hidden, and then adjust them individually through the Console. You must be an administrator or a master operator to make these hidden sites become visible.

Use this dialog to add your own logo to any content that is presented to the user on the Client system. Branding can be important to reassure your users that the information has corporate approval.

Advanced Options

The third tab opens the **Advanced Options** dialog.

This dialog lists any global settings that apply to your particular installation.

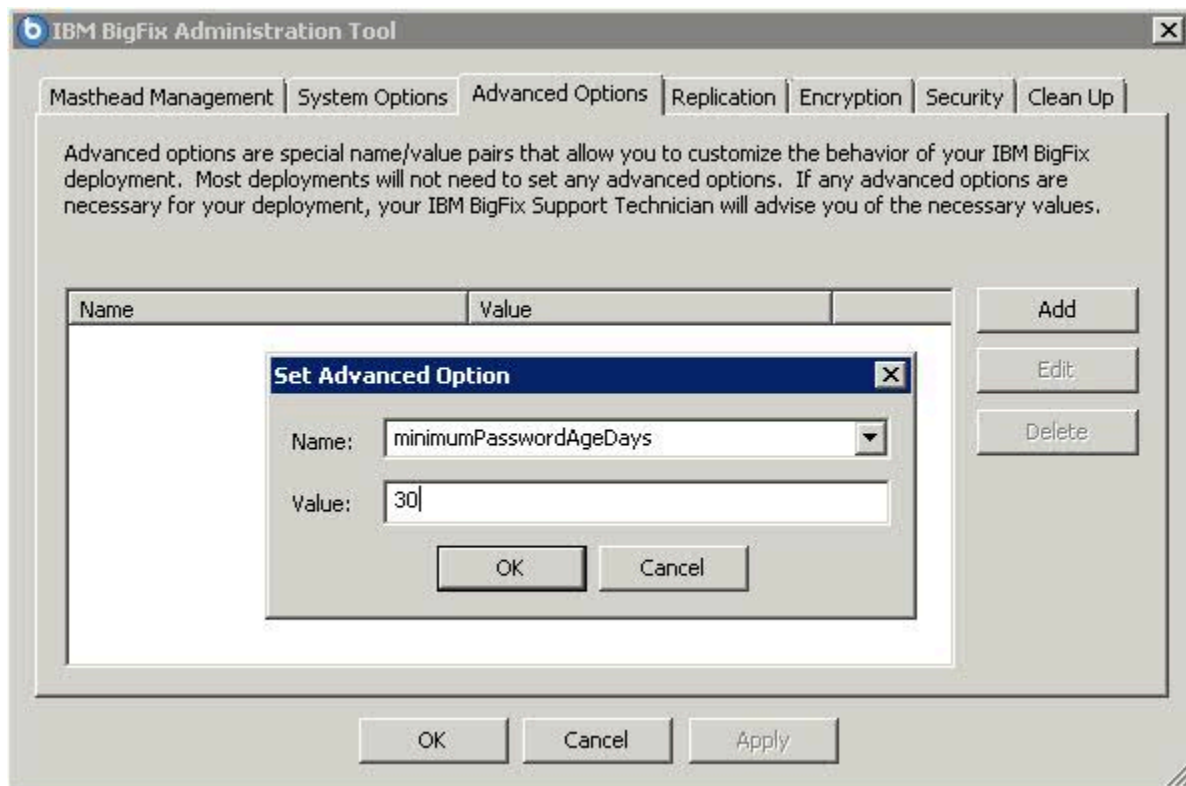

These options are name/value pairs, and are typically supplied by your HCL Software Support. As an example, if you are subscribed to the Power Management site, one of these options allows you to enable the WakeOnLAN function.

Some of these settings overlap with special registry keys that can be set to influence the behavior of individual consoles. As a rule of thumb, if the setting represents a boolean option, the consoles will have the default behavior unless either the registry or the Advanced Deployment Options specify the non-default behavior.

For a list of available options that you can set, see [List of advanced options](#).

Replication

The fourth tab opens the **Replication** dialog.

Use this dialog to visualize your replication servers. For more information, see the [Configuration Guide](#).

Encryption

The fifth tab opens the **Encryption** dialog.

Use this dialog if you want that the Client encrypts reports to be sent to the server. This is useful if the reports contain confidential information. You can use this tab to generate a new encryption key or to disable encryption altogether.


If you click **Generate Key**, the server creates a public key and a private key. The private key is stored in the database on the server. The public key is stored in the master actionsite. As soon as the clients receive the master actionsite, they start to encrypt the reports with the public key. On the server, the reports are decrypted using the private key.

If you configured your environment so that the top level relays are in a secure location with the server, you can delegate the responsibility to decrypt reports to the relays to reduce the workload on the server. This is the list of steps to run if you want to set this configuration:

1. In the **Encryption** tab, generate the key pair, private and public, on the server.
2. Manually copy the private key on the relays to delegate for decryption.
3. In the **Security** tab, click **Enable Enhanced Encryption**. After you click that button, the master actionsite is sent across the BigFix network and the clients start to encrypt reports with the public key.
4. When a relay that has the private key, receives the encrypted reports, it decrypt them and forward the reports in clear text to the server.

Security

Click the sixth tab to open the **Security** dialog.

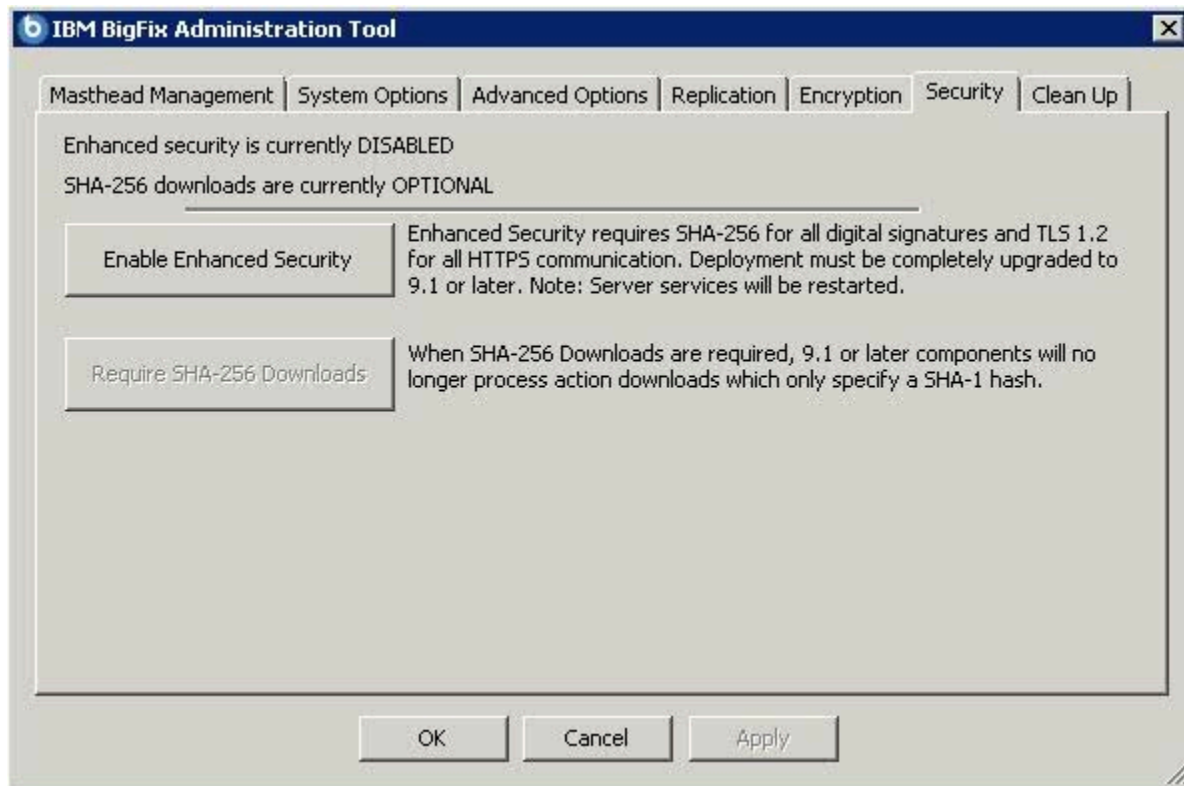

Click the **Enable Enhanced Security** button to adopt the SHA-256 cryptographic digest algorithm for all digital signatures as well as for content verification and to use the TLS 1.2 protocol for communications among the BigFix components.

To enable SHA-256 ensure that the following conditions are satisfied:

- The updated license was gathered.
- Unsubscribe from all external sites that do not support SHA-256.



Note: If you use this setting you break backward compatibility because BigFix version 9.0 or earlier components cannot communicate with BigFix version 9.5 server or relays.



Warning: When you disable the enhanced security mode, the BESRootServer service fails to restart automatically. To solve the problem, restart the service manually.

To enable enhanced security on a Disaster Server Architecture (DSA) server in Linux environments:

You must enable it only on the primary server by running the command `./BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk> -enableEnhancedSecurity -requireSHA256Downloads`.

You do not have to enable it on the replica servers. You might be requested to run the command `./BESAdmin.sh syncmastheadandlicense -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>]` on the replica servers to ensure that the updated action site is propagated to the replica servers as well.

To enable enhanced security on a Disaster Server Architecture (DSA) server in Windows environments:

You must enable it only on the primary server by following the procedure described in On Windows Systems.

You must run the `.\BESAdmin.exe` command on the replica servers to ensure that the updated action site is propagated to the replica servers as well.

The **Require SHA-256 Downloads** button is disabled until you click the **Enable Enhanced Security** button. Click the **Require SHA-256 Downloads** button to change all download verification to use only the SHA-256 algorithm. Existing custom actions might need to be edited to conform to the **prefetch** action script syntax updated for V9.1 and above.




Note: If you do not select this option, the file download integrity check is run using the SHA-1 algorithm.

If you click **Enable Enhanced Security** without selecting **Require SHA-256 Downloads**, the SHA-256 algorithm will be used to for digital signatures and for content verification, TLS 1.2 protocol will be used for communications among the BigFix components but you will still be able to download SHA-1 content from external sites.


For more information about the BigFix Enhanced Security feature, the supported security configuration and enhanced security requirements evaluation, see Security Configuration Scenarios.

Computer Remover

Click **Run Now** in the BES Computer Remover section to remove computers.

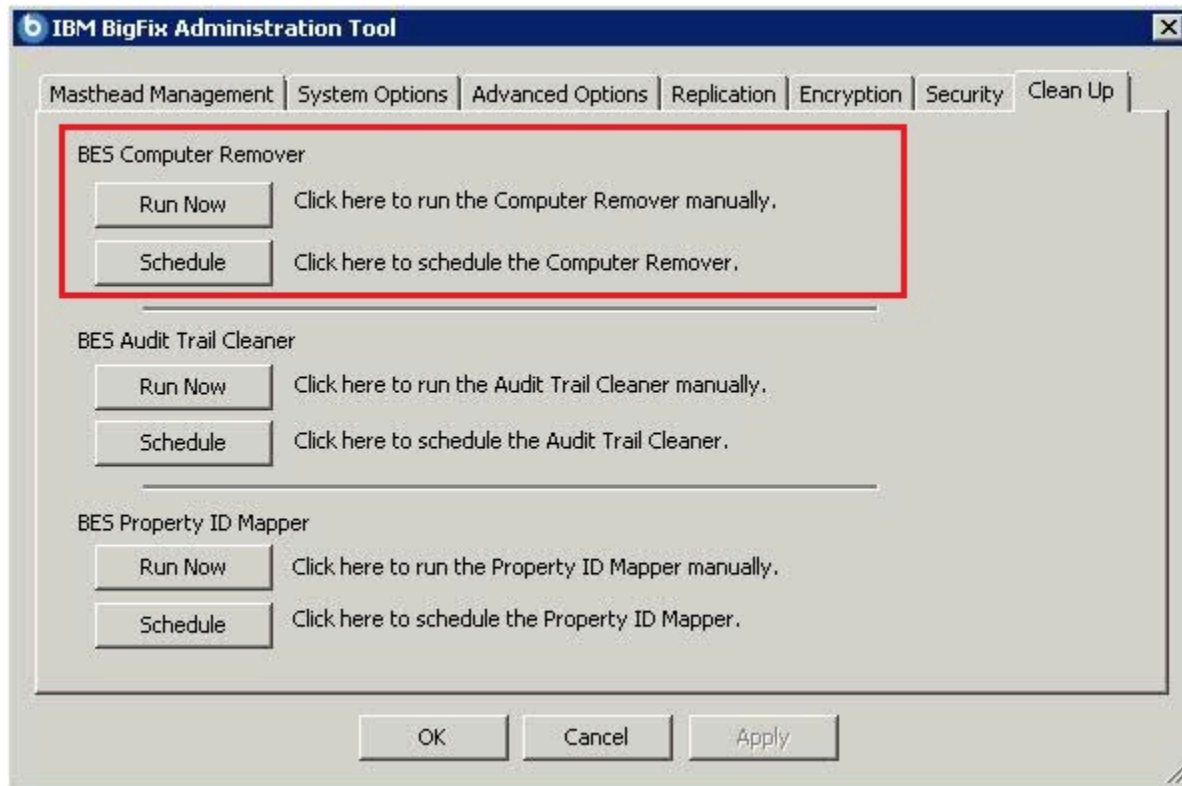

The following window is displayed:

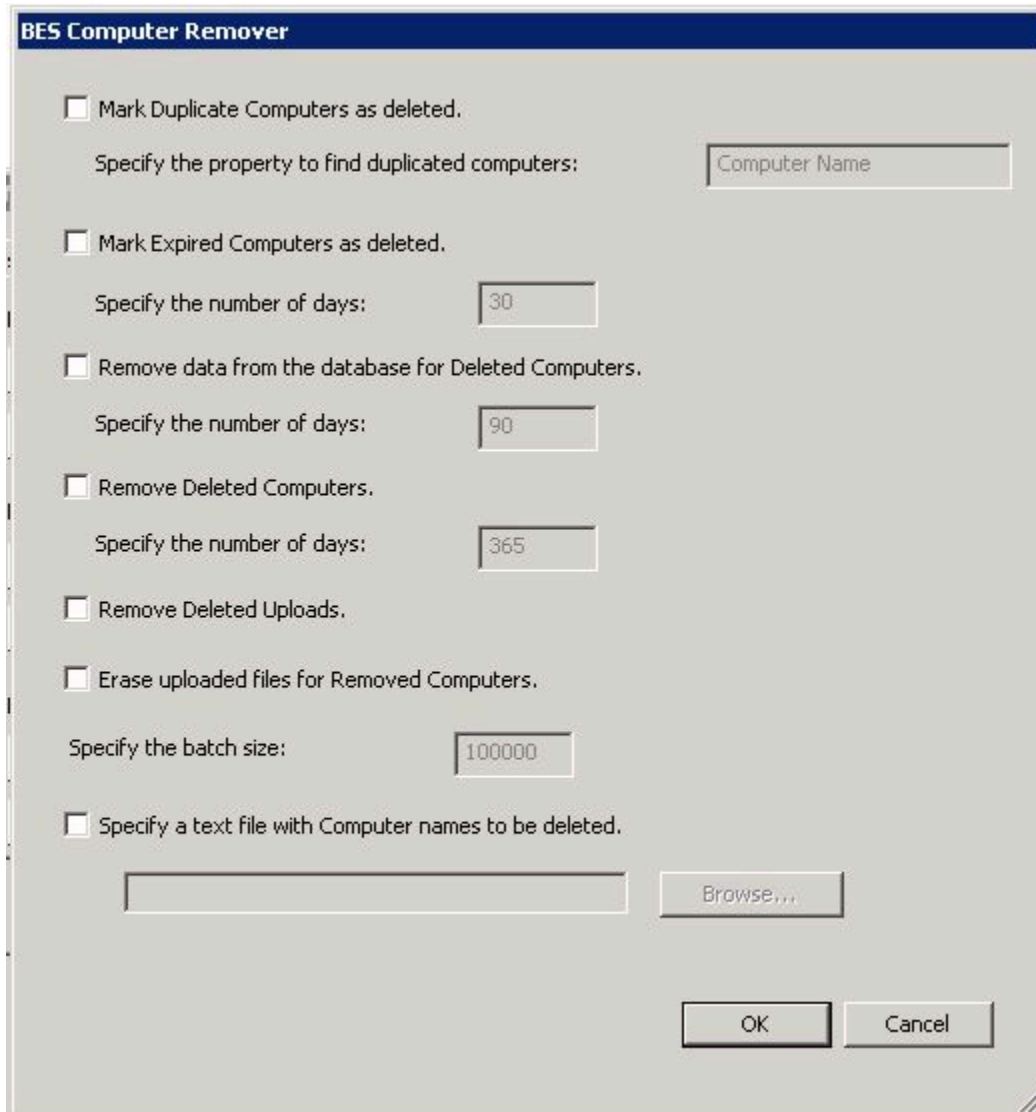

The screenshot shows the 'BES Computer Remover' dialog box. It has a title bar with the text 'BES Computer Remover'. The dialog contains several options, each with a checkbox and a text input field. The options are: 'Mark Duplicate Computers as deleted.' with a text input field labeled 'Computer Name'; 'Mark Expired Computers as deleted.' with a text input field containing '30'; 'Remove data from the database for Deleted Computers.' with a text input field containing '90'; 'Remove Deleted Computers.' with a text input field containing '365'; 'Remove Deleted Uploads.'; 'Erase uploaded files for Removed Computers.' with a text input field containing '100000'; and 'Specify a text file with Computer names to be deleted.' with a text input field and a 'Browse...' button. At the bottom right are 'OK' and 'Cancel' buttons.

BES Computer Remover

☐ Mark Duplicate Computers as deleted.
Specify the property to find duplicated computers:

☐ Mark Expired Computers as deleted.
Specify the number of days:

☐ Remove data from the database for Deleted Computers.
Specify the number of days:

☐ Remove Deleted Computers.
Specify the number of days:

☐ Remove Deleted Uploads.

☐ Erase uploaded files for Removed Computers.
Specify the batch size:

☐ Specify a text file with Computer names to be deleted.

The tool separates the deletion operations to mark a computer as being deleted in the database and to be removed from BigFix Console or Web Reports. Marking a computer as being deleted does not remove any data from the database and if the computer reports back in, it is restored. The tool also supports the removal of data about computers from the database to free disk space and allow the database to run faster.

You can specify to remove the following data:

- Duplicated computers by selecting **Mark Duplicate Computers as deleted** and specifying the name of the duplicated computer. The computer is marked as deleted if a computer exists with the specified property.



Note: To successfully delete the duplicated computer, specify in the text field of the BES Computer Remover panel the property name in English, for example the computer name. The BES Computer Remover tool, like all other Clean Up tools, interacts directly with the database, and the property names are stored inside the database in English. For this reason, the property names must be specified in English.

- Expired computers by selecting **Mark Expired Computers as deleted** and specifying a number of days. The computers are marked as deleted if they have not sent any reports after the specified number of days.
- Deleted Computers by selecting **Remove data from the database for Deleted Computers** and specifying the number of days and the batch size. The data from computers that are already marked as deleted and have not sent any reports after the specified number of days is removed.
- Removed computers by selecting **Remove Deleted Computers** and specifying a number of days (minimum 30). The computers are those ones marked as deleted since the specified number of days.
- Uploaded files by selecting **Remove Deleted Uploads**. The uploaded files are those ones marked as deleted.
- Uploaded files related to deleted computers by selecting **Erase uploaded files for Removed Computers**. The uploaded files are those ones of clients whose definition has been removed from the database.
- Specific computers by selecting **Specify a text file with Computer names to be deleted** and entering the name of a text file containing a list of computer names separated by new lines. This option is not available if you schedule the computer deletion operation.



Note: When removing computer names by using a text file, you can use the "%" character as a wildcard in the text file, and the tool will remove all computer names starting with the text string that you specified before the "%" character.

To automate the process of removing computers from the BigFix Console and deleting the data from the database, you can schedule the process by clicking **Schedule** in the BES Computer Remover section of the BigFix Administration Tool.

The following window is displayed:

The screenshot shows the 'BES Computer Remover' dialog box. It has a title bar with the text 'BES Computer Remover'. The dialog contains several options, each with a checkbox and a text input field for specifying parameters. The options are: 'Mark Duplicate Computers as deleted.' with a text field 'Computer Name'; 'Mark Expired Computers as deleted.' with a text field '30'; 'Remove data from the database for Deleted Computers.' with a text field '90'; 'Remove Deleted Computers.' with a text field '365'; 'Remove Deleted Uploads.'; and 'Erase uploaded files for Removed Computers.' Below these is a text field '100000' for 'Specify the batch size:'. The 'Start at:' section has a date dropdown set to '12/ 4/2017' and a time spinner set to '6:21:00 AM'. The 'Repeat every:' section has two radio buttons: 'No Repeat' (unselected) and 'Every' (selected). The 'Every' option has a text field set to '24' followed by the text 'hour(s)'. At the bottom right are 'OK' and 'Cancel' buttons.

BES Computer Remover

☐ Mark Duplicate Computers as deleted.
Specify the property to find duplicated computers:

☐ Mark Expired Computers as deleted.
Specify the number of days:

☐ Remove data from the database for Deleted Computers.
Specify the number of days:

☐ Remove Deleted Computers.
Specify the number of days:

☐ Remove Deleted Uploads.

☐ Erase uploaded files for Removed Computers.

Specify the batch size:

Start at:

Repeat every:
☐ No Repeat
☒ Every hour(s)


You can specify the date to start the computer deletion and also a period of time to make this deletion operation recursive.

Audit Trail Cleaner


Use this tool to clear historical data, used as audit trail, from the bfeenterprise database.

The audit trail contains deleted and previous versions of Fixlets, tasks, baselines, properties, mail boxes, actions, and analyses. The audit trail is not used by BigFix and can be deleted to reduce the database size. Before running this tool and removing the audit trail from the product database, create a historic archive of the current database and save it to a secure location to preserve the audit trail history.

Click **Run Now** in the BES Audit trail Cleaner section to clear data:

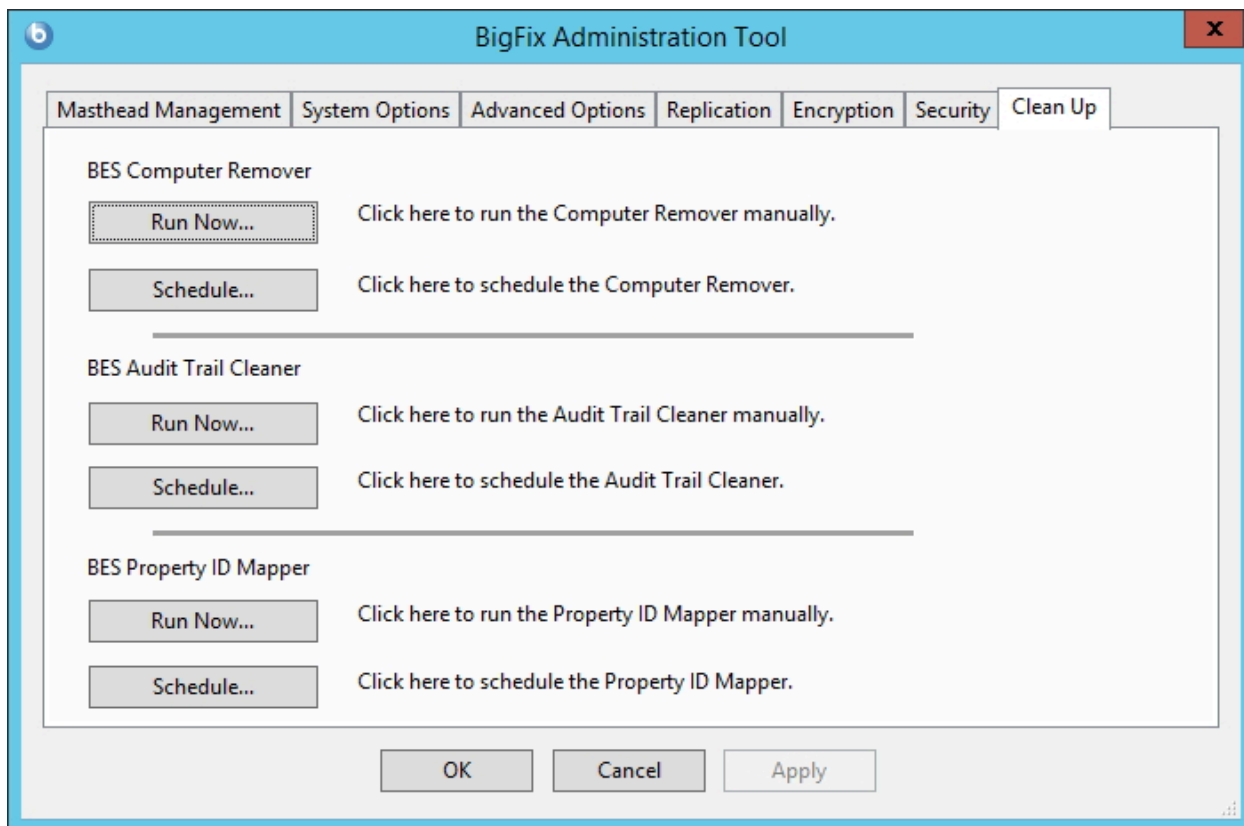

The following window is displayed:

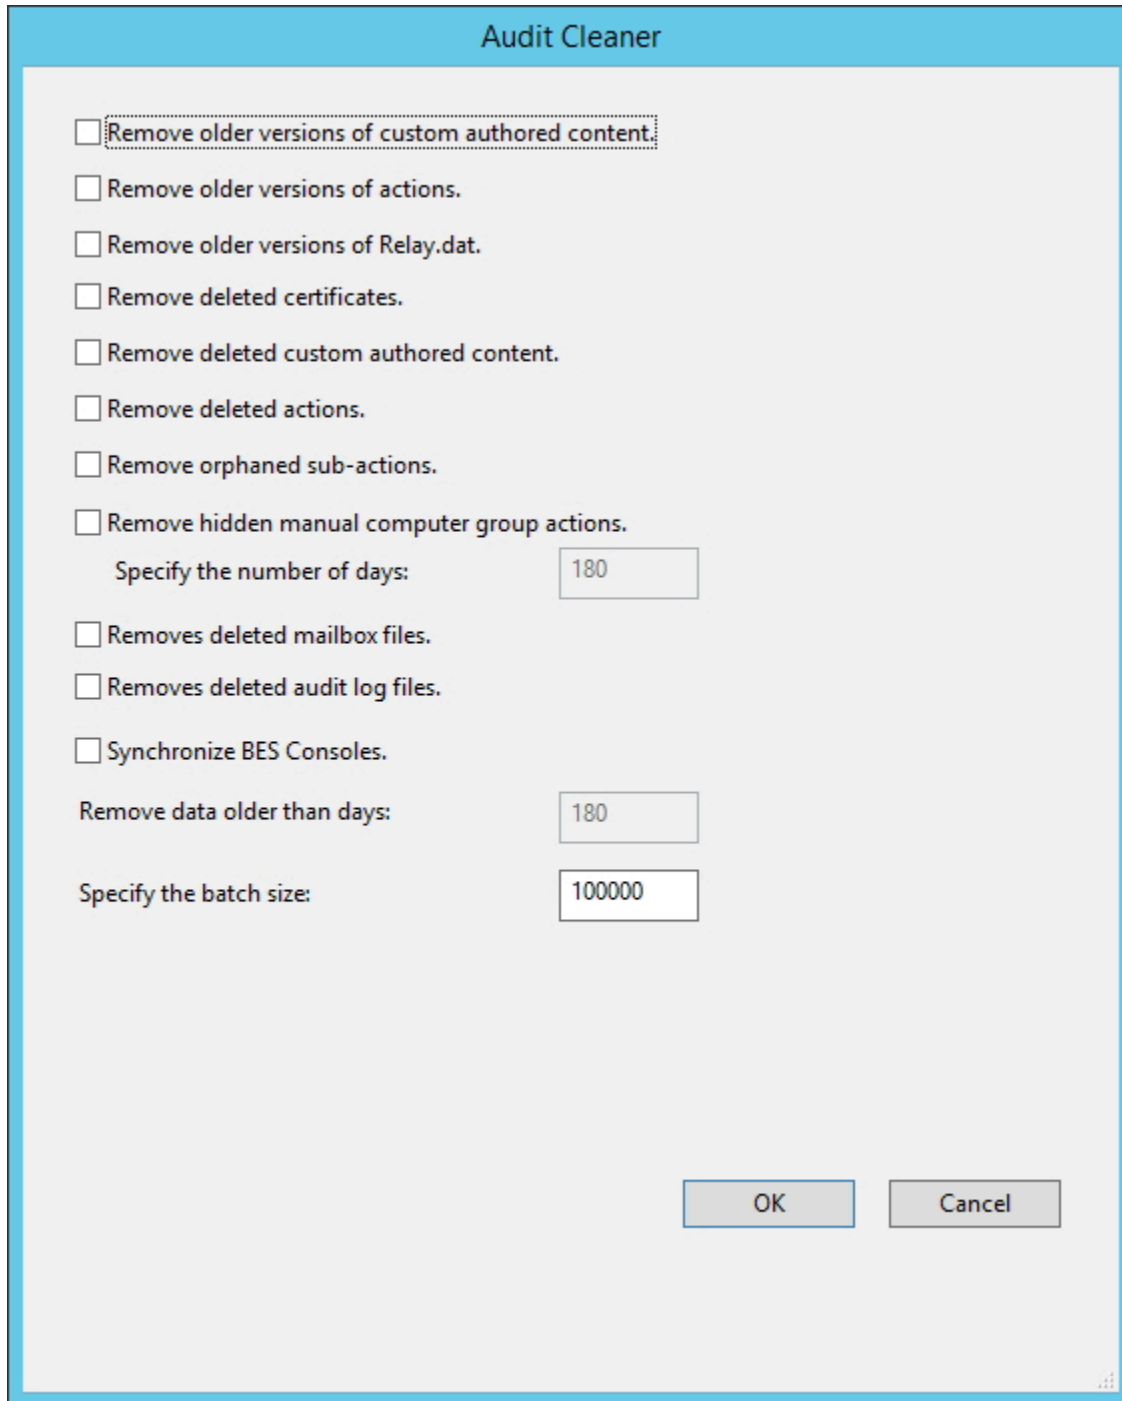

The screenshot shows the 'Audit Cleaner' dialog box. It has a light blue title bar with the text 'Audit Cleaner'. The main area is white and contains a list of checkboxes for selecting data to be cleaned. The first checkbox, 'Remove older versions of custom authored content', is selected and has a dotted border. Below the checkboxes are three input fields: 'Specify the number of days:' with the value '180', 'Remove data older than days:' with the value '180', and 'Specify the batch size:' with the value '100000'. At the bottom right are 'OK' and 'Cancel' buttons.

Audit Cleaner

- ☒ Remove older versions of custom authored content.
- ☐ Remove older versions of actions.
- ☐ Remove older versions of Relay.dat.
- ☐ Remove deleted certificates.
- ☐ Remove deleted custom authored content.
- ☐ Remove deleted actions.
- ☐ Remove orphaned sub-actions.
- ☐ Remove hidden manual computer group actions.
Specify the number of days:
- ☐ Removes deleted mailbox files.
- ☐ Removes deleted audit log files.
- ☐ Synchronize BES Consoles.

Remove data older than days:

Specify the batch size:

OK Cancel

The tool can count and delete the following sets of data:

- **Remove older versions of custom authored content** - Every edit to Fixlets, tasks, baselines, and analyses creates a new version; the earlier versions can be deleted.
- **Remove older versions of actions** - Any time you stop or start an action a new version is created; the earlier versions can be deleted.
- **Remove older versions of Relay.dat** - Any time you install or uninstall a new relay a new version is created; the earlier versions can be deleted.
- **Remove deleted certificates** - The old certificates that were deleted.
- **Remove deleted custom authored content** - When you delete a Fixlet, task, baseline, or analysis using the console, the data is marked as deleted in the database and preserved. The deleted content, including all the earlier versions, and the corresponding client reports can be deleted.
- **Remove deleted actions** - When you delete an action using the console, the data is marked as deleted in the database and preserved. The deleted actions, including all the earlier versions, and the corresponding client reports can be deleted.
- **Remove orphaned sub-actions** - The orphaned sub-actions from multiple action groups that were deleted.
- **Remove useless action results** - Earlier versions of Endpoint Manager V7.2.4.6 might cause clients to report ActionResults which were not used in any way but would use up space in the database. These useless ActionResults can be deleted.
- **Remove hidden manual computer group actions** - Manual Computer Groups create hidden actions that add and remove computers to and from groups and the actions can build up over time. This option deletes actions after an expiration period (default 180 days) from when they were created.
- **Remove deleted mailbox files** - Deleted Mailbox Files are stored in a table in the database and can be removed.
- **Remove deleted audit log files** - Remove deleted server_audit.log files to prevent the server running out of disk space.
- **Synchronize BES Consoles** - The BigFix Console maintains a local cache of the database that will become unsynchronized when data is removed with this tool. To prevent this from happening, the tool sets a flag in the database to force all BigFix Consoles to re-load the cache when they next start up.

In the **Remove data older than days** you can specify to remove data earlier than a specified date. The default value is 99 days.

Deleting large sets of data causes the SQL transaction log to quickly increase in size, the log will temporarily be larger than the data being removed until the database is shrunk. You can also specify batched deletions to remove results in sets.

To automate the process of removing all this data from the the database you can schedule the process by clicking **Schedule** in the **BES Audit trail Cleaner** of the BigFix Administration Tool.

The following window is displayed:

The screenshot shows the 'Audit Cleaner' dialog box. It has a light blue title bar and a light gray main area. The dialog contains several checkboxes for selecting items to be cleaned, followed by input fields for specifying the number of days and batch size. At the bottom, there are fields for the start date and time, and a section for repeating the operation. The 'Repeat every' section has two radio buttons: 'No Repeat' and 'Every'. The 'Every' option is selected, and the input field next to it contains the number '24'. The unit 'hour(s)' is displayed to the right of the input field. There are 'OK' and 'Cancel' buttons at the bottom right.

Audit Cleaner

- ☐ Remove older versions of custom authored content.
- ☐ Remove older versions of actions.
- ☐ Remove older versions of Relay.dat.
- ☐ Remove deleted certificates.
- ☐ Remove deleted custom authored content.
- ☐ Remove deleted actions.
- ☐ Remove orphaned sub-actions.
- ☐ Remove hidden manual computer group actions.

Specify the number of days:

- ☐ Removes deleted mailbox files.
- ☐ Removes deleted audit log files.
- ☐ Synchronize BES Consoles.

Remove data older than days:

Specify the batch size:

Start at:

Repeat every:

- ☐ No Repeat
- ☒ Every hour(s)

You can specify the date to start the data deletion and also a period of time to make this deletion operation recursive.


Property ID Mapper

After updating a property you must run the Property ID Mapper tool to update the PropertyIDMap table of the BFEnterprise database with the corresponding changes.


This table maps retrieved property names to the SiteID, AnalysisID, PropertyID used to reference properties in the QUESTIONRESULTS and LONGQUESTIONRESULTS tables.

The tool creates the PropertyIDMap table if it does not exist.


After creating or deleting a property, click **Run Now** in the BES Property ID Mapper section to update the PropertyIDMap table with changes:

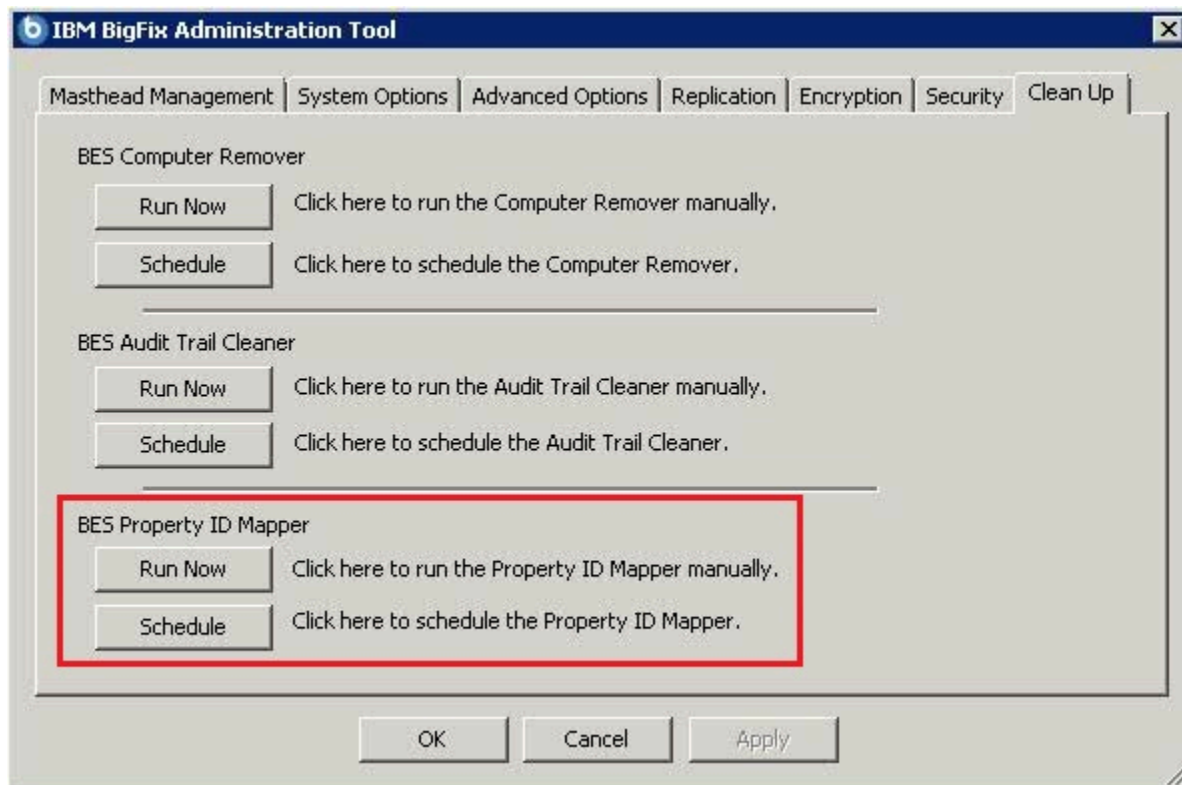

The following window is displayed to create, update, or remove the PropertyIDMap table:

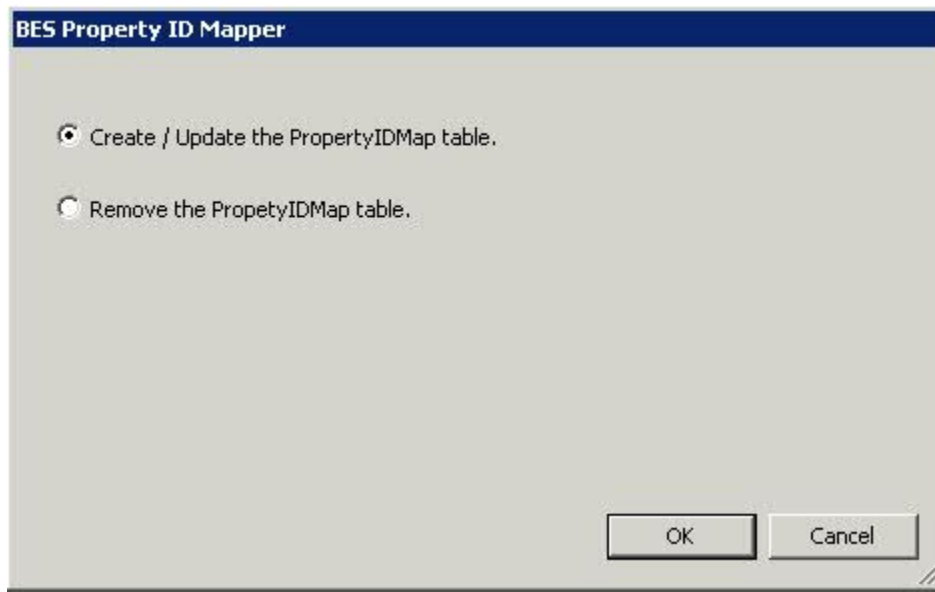

To automate the process of creating or updating the PropertyIDMap table, you can schedule the process by clicking **Schedule** in the BES Property ID Mapper section of the BigFix Administration Tool.

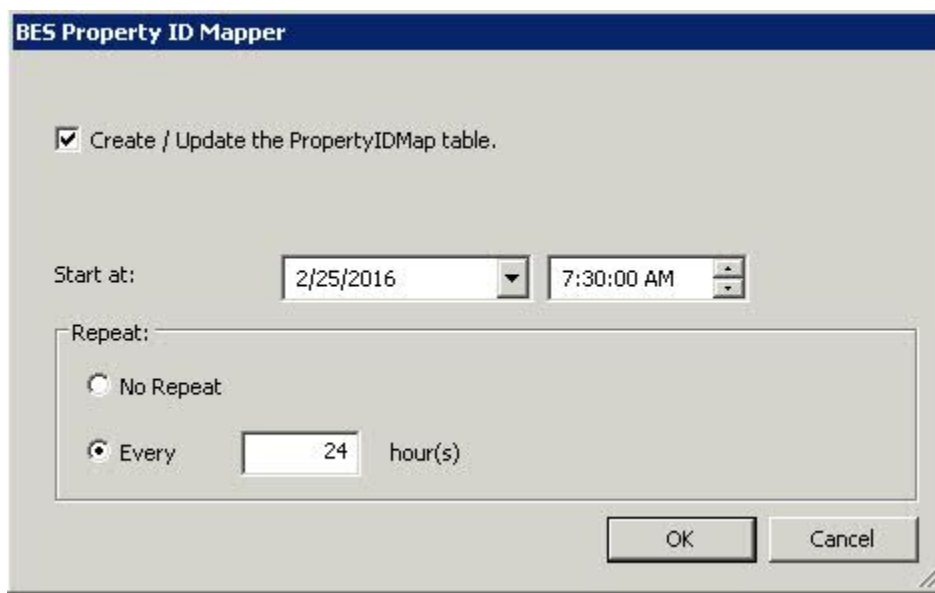

BESAdmin Windows Command Line

The installation automatically downloads the BigFix Administration Tool program `BESAdmin.exe`, in the `%PROGRAM FILES%\BigFix Enterprise\BES Server` directory.

You can run the script `BESAdmin.exe` to perform additional operations. To run this script from the command prompt, use the following command:

```
.\BESAdmin.exe /service { arguments}
```

where *service* can be one of the following:

```
audittrailcleaner
converttoldapoperators
createwebuicredentials
findinvalidactions
findinvalidsignatures
minimumSupportedClient
minimumSupportedRelay
propagateAllOperatorSites
propertyidmapper
removecomputers
reportencryption
resetDatabaseEpoch
resignsecuritydata
revokewebuicredentials
rotateserversigningkey
securitysettings
setproxy
updatepassword
```



Note: The notation `<path+license.pvk>` used in the command syntax that is displayed across this topic stands for `path_to_license_file/license.pvk`.

Each service has the following *arguments* :

audittrailcleaner

You can run this service to remove historical data from the bfenterprise database that is stored to serve as an audit trail. This audit trail slowly increases in size over the lifetime of a BigFix deployment. The audit trail contains deleted and earlier versions of Fixlets, tasks, baselines, properties, mailbox files, actions, and analyses. The audit trail is not used by BigFix in any way and can be deleted to reduce the database size. BigFix recommends that you create a historic archive of the current database and save it to a secure location before you run this tool to preserve the audit trail, thus removing it from the product database, but not completely deleting the history.

The service can count and delete the following sets of data:

- **Older Versions of Custom Authored Content** (/oldcontent): Every edit to Fixlets, Tasks, Baselines, and Analyses creates a new version, the earlier versions can be deleted.
- **Older Versions of Actions** (/oldactions): Any time that you stop or start an Action, a new version is created; the earlier versions can be deleted.
- **Older Versions of relay.dat** (/oldrelaydatfile): Any time that you install or uninstall a new relay, a new version is created; the earlier versions can be deleted.
- **Deleted Custom Authored Content (all versions)** (/deletedcontent): When you delete a Fixlet, Task, Baseline, and Analysis using the console, the data is marked as deleted in the database and preserved. The deleted content, including all of the earlier versions, and the corresponding client reports can be deleted.
- **Deleted Actions(all versions)** (/deletedactions): When you delete an action using the console, the data is marked as deleted in the database and preserved. The deleted actions, including all of the earlier versions, and the corresponding client reports can be deleted.
- **Useless Action Results** (/uselessactionresults): Earlier versions of Endpoint Manager (before BigFix 7.2.4.60) might cause clients to report

ActionResults that were not used in any way but would use up space in the database. These useless ActionResults can be deleted.

- **Orphaned sub-actions** (/orphanedsubactions): From multiple action groups that were deleted.
- **Hidden Manual Computer Group Actions** (/hiddenactions): Manual Computer Groups create hidden actions that add and remove computers to and from groups and the actions can build up over time. This option deletes actions after an expiration period (default 180 days) from when they were created.
- **Older Version of Mailbox Files** (/deletedmailbox): Deleted Mailbox Files are stored in a table in the database and can be removed.
- **Synchronizing BES Consoles** (/synconsoles): The BigFix Console maintains a local cache of the database that becomes not synchronized when data is removed with this tool. To avoid such inconsistencies, the tool sets a flag in the database to force all BigFix Consoles to reload the cache when the Console is started up.
- **Removing data older than** (/olderthan): Removes data earlier than a specified date.
- **Batched deletion** (/batchsize): Deleting large sets of data causes the SQL transaction log to quickly increase in size, the log temporarily becomes larger than the data being removed until the database is shrunk. Batched deletion removes results in sets.

The syntax of this service changes depending on the action you specify:

```
.\BESAdmin.exe /audittrailcleaner { /displaysettings | /run [delete_data_options] |
    /schedule [delete_data_options] [scheduling options] |
    /preview [delete_data_options]
    [preview options] }
```

```
.\BESAdmin.exe /audittrailcleaner /displaysettings
```

```
.\BESAdmin.exe /audittrailcleaner /run [ /oldcontent ] [ /oldactions ]
    [ /oldrelaydatfile ] [ /deletedcontent ] [ /deletedactions ] [ /hideUI ]
    [ /uselessactionresults ] [ /orphanedsubactions ] [ /hiddenactions=<days> ]
    [ /deletedmailbox ] [ /synconsoles ] [ /olderthan=<days> ] [ /batchsize=<size> ]
```

```
.\BESAdmin.exe /audittrailcleaner /sitePvkLocation=<path+license.pvk>
    [ /sitePvkPassword=<password> ] /schedule
[ [ /oldcontent ] [ /oldactions ]
    [ /oldrelaydatfile ] [ /deletedcontent ] [ /deletedactions ]
    [ /uselessactionresults ]
    [ /orphanedsubactions ] [ /hiddenactions=<days> ] [ /deletedmailbox ]
    [ /synconsoles ]
    [ /olderthan=<days> ] [ /batchsize=<size> ] [ /cleanstarttime=<yyyymmdd:hhmm>
    [ /cleanperiodicinterval=<hours> ] ] | /disable ]
```

```
.\BESAdmin.exe /audittrailcleaner /preview [ [ /oldcontent ] [ /oldactions ] [
    /oldrelaydatfile ] [ /deletedcontent ] [ /deletedactions ]
    [ /uselessactionresults ] [
    /orphanedsubactions ] [ /hiddenactions=<days> ] [ /deletedmailbox ]
    [ /olderthan=<days> ]
    | [ /scheduled ] ]
```

where:

- **displaysettings** shows the settings that are previously set with the `schedule` action.
- **run** runs the tool with the specified settings. Before you use this option, check the settings that affect the database by using the **preview** action. Use option `/hideUI` to avoid pop-up windows notifying action results.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the `disable` option.
- **preview** shows the number of database rows affected by the specified settings. If no setting is passed to the preview option, the preview performs the count by setting all options to true and using the default values for dates. Use the `scheduled` option to preview the scheduled settings.

For more information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

converttoldapoperators

You can convert local operators to LDAP operators, so that they can log in with their LDAP credentials. Optionally you can use the `mappingFile` argument to specify a file, the mapping file, where each line has the name of the user to convert, followed by a tab, followed by the name of the user in LDAP/AD. Specify the name using the same format that the user will use to log into the console, *domain\user*, *user@domain*, or *user*. If you do not specify a mapping file, all users are converted assuming their name in LDAP/AD is the same as their local user name.

The syntax to run this service is:

```
.\BESAdmin.exe /convertToLDAPOperators [/mappingFile:<file>]
```

createweuicredentials

Use this service to generate the certificates used as WebUI credentials. Use the following syntax to run the command:


```
.\BESAdmin.exe /createwebuicredentials
/sitePvkLocation:<path+license.pvk>
/sitePvkPassword:<pwd> /webUICertDir:<path>
/webUIHostname:<WebUIHostnameOrIP>
```

This service generates a folder named `cert_WebUIHostnameOrIP` in the path specified by the **webUICertDir** option.

webUICertDir

Specifies the path to the parent folder of the new folder containing the certificates. This folder must exist.

webUIHostname

Specifies the hostname or IP address of the computer that will host your WebUI.



Note: If you need to generate WebUI credentials certificates, but you have no WebUI in your deployment, then set:

webUICertDir

To the BigFix server folder. For example, **BigFix Enterprise\BES Server**.

webUIHostname

To the BigFix server IP address or hostname.

findinvalidactions

You can check for invalid actions in the database by specifying the following parameter:

- (Optional) `-deleteInvalidActions`: Deletes invalid actions.

The syntax to run this service is:

```
.\BESAdmin.exe /findinvalidactions [ /deleteInvalidActions ]
/sitePvkLocation=<path+license.pvk> [ /sitePvkPassword=<pwd> ]
```

findinvalidsignatures

You can check the signatures of the objects in the database by specifying the following parameters:

-resignInvalidSignatures (optional)

Attempts to resign any invalid signatures that BESAdmin finds.

-deleteInvalidlySignedContent (optional)

Deletes contents with invalid signatures.

For more information about invalid signatures, see [Resolving invalidly signed content problems in the console](#).

The syntax to run this service is:

```
.\BESAdmin.exe /findinvalidsignatures
[ /resignInvalidSignatures | /deleteInvalidlySignedContent ]
```

minimumSupportedClient

This service defines the minimum version of the BigFix Agents that are used in your BigFix environment.



Note: Based on this setting, the BigFix components can decide when it is safe to assume the existence of newer functions across all the component in the deployment. Individual agent interactions might be rejected if the interaction does not comply with the limitations that are imposed by this setting.

The currently allowed values are:

- **0.0** that means that no activity issued by BigFix Agents with versions earlier than V9.0, such as archive files and reports uploads, are prevented from running or limited. This behavior applies also if the `minimumSupportedClient` service is not set.
- **9.0** that means that:
 - Unsigned reports, such as the reports sent by BigFix Clients earlier than V9.0, are discarded by FillDB.
 - The upload of an unsigned archive file that is generated on a BigFix Client earlier than V9.0, by an **archive now** command for example, fails.

If you ran a fresh installation of BigFix V9.5.6 or later using a BES Authorization file, by default all the BigFix Clients earlier than V9.0 are prevented from joining your environment because the `minimumSupportedClient` service is automatically set to **9.0**.

The value assigned to this service, if set, remains unchanged:

- If you upgraded to V9.5.6 or later.
- If you installed BigFix V9.5.6 or later using an existing masthead.

In both cases, if the service did not exist before, it will not exist afterward as well.

The current value `<VALUE>` assigned in your environment to the `minimumSupportedClient` service is displayed in the line `x-bes-minimum-supported-client-level: <VALUE>` of the masthead file. You can see the current value by running the following query on the BigFix Server, using the [Fixlet Debugger](#) or the BigFix Query Application available on the BigFix WebUI:

```
Q: following text of last ": " of line whose (it starts with
    "x-bes-minimum-supported-client-level:" ) of masthead of site "
actionsite"
```

The syntax to run this service is:

```
.\BESAdmin.exe [/sitePvkFile=<path+license.pvk>] [/sitePassword=
<password>]
/minimumSupportedClient=<version>.<release>
```

If you omit `[/sitePvkFile=<path+license.pvk>] [/sitePassword=<password>]`, you will be requested to enter the site key and password in a pop-up window.

For example, if you want to state that Agents earlier than V9.0 are not supported in your BigFix environment, you can run the following command:

```
.\BESAdmin.exe /minimumSupportedClient=9.0
```

minimumSupportedRelay

You can use this service, added with BigFix V9.5.6, to enforce specific criteria that affects the BigFix Agent registration requests. If this service is enabled, V9.5.6 Agents can continue to register to the V9.5.6 BigFix environment if their registration requests are signed and sent across the Relays hierarchy using the HTTPS protocol.



Note: Based on this service, the BigFix components can decide when it is safe to enable newer functions across all the component in the deployment. Individual agent interactions might be rejected if they do not comply with the limitations that are imposed by this setting.

The currently allowed values are:

- **0.0.0** that means that the BigFix Server accepts and manages:
 - Signed and unsigned registration requests coming from BigFix Agents.
 - Registration requests delivered from BigFix Agents that use the HTTP or the HTTPS protocols.

This behavior applies by default when you upgrade from previous versions to BigFix V9.5.6 or later. In this case, the

`minimumSupportedRelay` service is not added automatically to your configuration during the upgrade. Consider that this value is not displayed when you run the query to see the current value that is assigned in your environment to the `minimumSupportedRelay` service.

- **9.5.6** or later, which means that:
 - The BigFix Server enforces that registration requests coming from BigFix Agents V9.5.6 or later must be properly signed.
 - The BigFix Server and the Relays V9.5.6 or later enforce the use of the HTTPS protocol when exchanging BigFix Agent registration data.

These are side effects of enforcing this behavior:

- BigFix Agents earlier than V9.0 cannot send registration requests to the BigFix Server because they cannot communicate using the HTTPS protocol.
- Because BigFix Relays with versions earlier than V9.5.6 cannot handle correctly signed registration requests, any BigFix Client that uses those Relays might be prevented from continuing to register, or might fall back to a different parent Relay or directly to the Server.

If you ran a fresh installation of BigFix V9.5.6 or later using a License Authorization file, be aware that the side effects that are listed apply to your BigFix deployment because, in this particular installation scenario, the `minimumSupportedRelay` service is automatically set to **9.5.6** by default.

The current value `<VALUE>` assigned in your environment to the `minimumSupportedRelay` service is displayed in the line `x-bes-minimum-supported-relay-level: <VALUE>` of the masthead file. You can see the current value by running the following query on the BigFix Server, using the [Fixlet Debugger](#) or the BigFix Query Application available on the BigFix WebUI:

```
Q: following text of last ": " of line whose (it starts with
"x-bes-minimum-supported-relay-level:" ) of masthead of site "actionsite"
```

This query displays a value only when `<VALUE>` is set to **9.5.6**; if it is set to **0.0.0**, it does not display a value.

The syntax to run this service is:

```
.\BESAdmin.exe [/sitePvkFile=<path+license.pvk>] [/sitePvkPassword=<password>]
/minimumSupportedRelay=<version>.<release>.<modification>
```

If you omit `[/sitePvkFile=<path+license.pvk>] [/sitePvkPassword=<password>]`, you must to enter the site key and password in a pop-up window.

For example, if you want that only the registration requests that are signed and carried through HTTPS are managed by your BigFix Server, you can run the following command:

```
.\BESAdmin.exe /minimumSupportedRelay=9.5.6
```

propagateAllOperatorSites

This service forces the server to propagate a new version of every operator site. This command is useful after a server migration because you can be sure that data are available for clients to gather and it prevents from failures. This is the command syntax:

```
.\BESAdmin.exe /propagateAllOperatorSites
```

propertyidmapper

This service creates, updates, and deletes a table (PropertyIDMap) in the BFEEnterprise database that maps retrieved property names for the SiteID, AnalysisID, PropertyID used to reference properties in the QUESTIONRESULTS and LONGQUESTIONRESULTS tables. It creates the PropertyIDMap table if it does not exist (requires table creation permissions). This service must be run after creating or deleting a property to update the PropertyIDMap table with changes.

The general syntax of this service is the following:

```
.\BESAdmin.exe /propertyidmapper { /displaysettings | /run [property_idmapper_options]
    | /schedule [property_idmapper_options] [scheduling options] }
```

The syntax of this service changes depending on the action you specify:

```
.\BESAdmin.exe /propertyidmapper /displaysettings
```

```
.\BESAdmin.exe /propertyidmapper /run [ /createtable ] [ /remove
table ]
    [ /lookupproperty=<propertyname> ] [ /hideUI ]
```

```
.\BESAdmin.exe /propertyidmapper /schedule [ /createtable /start
time=<yyyymmdd:hhmm>
    [ /interval=<hours> ] | /disable ]
```

where:

- **displaysettings** shows the settings that are previously set with the `schedule` action.
- **run** runs the tool with the specified settings. Use option `/hideUI` to avoid pop-up windows notifying action results.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the `disable` option.

For more information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

removecomputers

The service runs database operations for the following sets of data:

- **Expired Computers** (/deleteExpiredComputers) Marks computers as deleted if they have not reported in recently.
- **Deleted Computers** (/purgeDeletedComputers): Physically deletes the computer related data from the database for computers that are already marked as deleted and have not reported in for a long time. It deletes the data related to an agent (such as the action results or the properties, and so on), not the agent itself that remains logically deleted (IsDeleted = 1) on the database. Therefore, as a consequence, if the same agent becomes active again, it is recognized and will reuse its previous computer ID.
- **Duplicate Computers** (/deleteDuplicatedComputers): Marks older computers as deleted if a computer exists with the same computer name.
- **Removal of deleted Computers** (/removeDeletedComputers): Physically deletes the computer information from the database for computers that are marked as deleted (IsDeleted = 1) since at least the indicated number of days (minimum 30). It deletes the information of the agent itself (such as the computer ID, and so on). Therefore, as a consequence, if the same agent becomes active again, a totally new computer ID will be assigned to the agent.
- **Removal of uploaded Files** (/removeDeletedUploads): Physically removes from the database the definition of uploaded files that are marked as deleted.
- **Removal of uploaded files of removed computers** (/eraseUploadFilesForRemovedComputers): Physically removes from the BigFix server file system all files uploaded by clients whose definition has been removed from the database.
- **Removal of Computers by name** (/removeComputersFile): Accepts a text file with a list of computer names that are separated by new lines and removes them from the deployment.

The general syntax of this service is:


```
.\BESAdmin.exe /removecomputers { /displaySettings | /run [remove_computers_options]
    | /schedule [remove_computers_options] [scheduling options]
    | /preview [remove_computers_options] [preview options] }
```

Depending on the action, you specify, the syntax changes as follows:

```
.\BESAdmin.exe /removecomputers /displaySettings
```

```
.\BESAdmin.exe /removecomputers /run [ /deleteExpiredComputers=<
days> ]
    [ /removeDeletedComputers=<days> ] [ /removeDeletedUploads ]
    [ /eraseUploadFilesForRemovedComputers ]
    [ /purgeDeletedComputers=<days> ]
    [ /deleteDuplicatedComputers [ /duplicatedPropertyName=<Prop
ertyName> ] ]
    [ /removeComputersFile=<path> ] [ /batchSize=<batch size> ]
    [ /hideUI ]
```

```
.\BESAdmin.exe /removecomputers /schedule [ [ /deleteExpiredComp
uters=<days> ]
    [ /removeDeletedComputers=<days> ] [ /removeDeletedUploads ]
    [ /eraseUploadFilesForRemovedComputers ]
    [ /purgeDeletedComputers=<days> ]
    [ /deleteDuplicatedComputers [ /duplicatedPropertyName=<Prop
ertyName> ] ]
    [ /removeStartTime=<YYYYMMDD:HHMM> [ /removePeriodicInterval
=<Hours> ] ]
    [ /batchSize=<batch size> ] | /disable ]
```

```
.\BESAdmin.exe /removecomputers /preview [ [ /deleteExpiredCompu
ters=<days> ]
    [ /removeDeletedComputers=<days> ] [ /removeDeletedUploads ]
```

```
[ /eraseUploadFilesForRemovedComputers ]
[ /purgeDeletedComputers=<days> ][ /deleteDuplicatedComputer
s
[ /duplicatedPropertyName=<PropertyName> ] ] |
[ /scheduled ] ]
```

where:

- **displaySettings** shows the settings that are previously set with the `schedule` action.
- **run** runs the tool with the specified settings. Before you use this option, check the settings that affect the database by using the `preview` action. Use option `/hideUI` to avoid pop-up windows that notify the action results.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the `disable` option.
- **preview** shows the number of database rows that are affected by the specified settings. If no setting is passed to the preview option, the preview performs the count by setting all options to true and using the default values for dates. Use the `scheduled` option to preview the scheduled settings.



Note: When using option `/removeDeletedComputers`, the number of days must be not less than 30.

For information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

reportencryption

You can generate, rotate, enable, and disable encryption for report messaging by running:

```
.\BESAdmin.exe /reportencryption { /status |
    /generatekey [/privateKeySize=<min|max>]
                [/deploynow=yes | /deploynow=no /outkeypath=<path
>]
                /sitePvkLocation=<path+license.pvk> [/sitePvkPass
word=<password>] |
    /rotatekey [/privateKeySize=<min|max> ]
                [/deploynow=yes
| /deploynow=no /outkeypath=<path> ]
                /sitePvkLocation=<path+license.pvk> [/sitePvkPasswo
rd=<password>] |
    /enablekey /sitePvkLocation=<path+license.pvk> [/sitePvkPasswo
rd=<password>] |
    /disable /sitePvkLocation=<path+license.pvk> [/sitePvkPassword
=<password>] }
```

where:

status

Shows the status of the encryption and which arguments you can use for that status.

generatekey

Allows you to generate a new encryption key.

rotatekey

Allows you to change the encryption key.

enablekey

Allows you to enable the encryption key.

disable

Allows you to put the encryption key in PENDING state. If you run again the `reportencryption` command with the `disable`

argument, the encryption changes from PENDING state to DISABLED.

deploynow=yes

Deploys the report encryption key to the server for decryption.

deploynow=no -outkeypath=<path>

The encryption key is not deployed to the server but it is saved in the `outkeypath` path.

For more information about this command and its behavior, see [Managing Client Encryption](#).

resetDatabaseEpoch

To clear all console cache information in BigFix Enterprise Service V7.0 or later versions. After you run this command:

```
.\BESAdmin.exe /resetDatabaseEpoch
```

subsequent console logins reload their cache files.

resignsecuritydata

You must resign all of the users content in the database by entering the following command:

```
.\BESAdmin.exe /resignSecurityData
```

if you get one of the following errors:

```
class SignedDataVerificationFailure
HTTP Error 18: An unknown error occurred while transferring data
from the server
```

when trying to login to the BigFix console. This command resigns security data by using the existing key file. You can also specify the following parameter:

```
/mastheadLocation=<path+/actionsite.afxm>
```

The complete syntax to run this service is:

```
.\BESAdmin.exe /resignsecuritydata /sitePvkLocation=<path+license.pvk>
[ /sitePvkPassword=<password> ] /mastheadLocation=<path+/actionsite.afxm>
```

revokewebuicredentials

You can revoke the authentication certificate of a specified WebUI instance.

The syntax to run this service is:

```
.\BESAdmin.exe /revokewebuicredentials /hostname=<host> /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<pvk_password>
```

If an authentication certificate is issued for the specified `hostname`, this certificate is revoked and the WebUI instance running on that `hostname` can no longer connect to the root server.

After revoking the credentials for a WebUI host, it will no longer connect to the root server. You can either remove the WebUI installation, or generate new credentials for that host, and replace the old certificate files on that host.

rotateserversigningkey

You can rotate the server private key to have the key in the file system match the key in the database. The command creates a new server signing key, resigns all existing content using the new key, and revokes the old key.

The syntax to run this service is:

```
.\BESAdmin.exe /rotateserversigningkey /sitePvkLocation=<path+license.pvk>
[ /sitePvkPassword=<password> ]
```

securitysettings { /hideFromFieldFromMasthead | /showFromFieldFromMasthead }

You can specify if you want to show or hide the value displayed by the From field in the masthead which contains the email address of the license assignee. During a fresh installation the value is hidden and the option

"hideFromFieldFromMasthead" is set to 1. During an upgrade the value remains unchanged.

The syntax to run this service is:

```
.\BESAdmin.exe /securitysettings
{ /hideFromFieldFromMasthead | /showFromFieldFromMasthead }
[/sitePvkLocation=<path+license.pvk>] [/sitePvkPassword=<pvk_password>]
```



Note: You can modify the "hideFromFieldFromMasthead" option from the BESAdmin command line only. Doing it from the BESAdmin interface is not supported because the masthead will not be regenerated when modifying the settings from the advanced settings panel of the interface.

securitysettings { /testTLSCipherList | /setTLSCipherList | /listTLSCiphers | /removeTLSCipherList }

To test if a TLS cipher list is compatible with the BigFix components, run the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password>
/testTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

After identifying a suitable TLS cipher list, you can set it by running the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password>
/setTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

To list all the TLS ciphers that are currently enabled, run the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk>
pvk> /sitePvkPassword=<password>
/listTLSCiphers
```

To remove a TLS cipher list from the deployment masthead and return to the default cipher list, run the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk>
pvk> /sitePvkPassword=<password>
/removeTLSCipherList
```

setproxy

If your enterprise uses a proxy to access the Internet, you must set a proxy connection to enable the BigFix server to gather content from sites and to do component-to-component communication or to download files.

For information about how to run the command and about the values to use for each argument, see [Setting a proxy connection on the server \(on page 427\)](#).

updatepassword

You can modify the password that is used for authentication by product components in specific configurations.

The syntax to run this service is:

```
.\BESAdmin.exe /updatepassword /type=<server_db|dsa_db>
[/password=<password>] /sitePvkLocation=<path+license.pvk>
[/sitePvkPassword=<pvk_password>]
```

where:

type=server_db

Specify this value to update the password that is used by the server to authenticate with the database.

If you modify this value, the command restarts all the BigFix server services.

type=dsa_db

Specify this value to update the password that is used in a DSA configuration by a server to authenticate with the database.

The settings `/password` and `/sitePvkPassword` are optional. If they are not specified in the command syntax, their value is requested interactively at run time. The password set by this command is obfuscated.

Working with TLS cipher lists

All network communications between the BigFix components and the internet are encrypted by using the TLS protocol standard. Starting from Version 9.5.11, master operators can control which TLS ciphers should be used for encryption. A master operator can set a deployment-wide TLS cipher list in the masthead by using BESAdmin.

The TLS cipher list is a colon-delimited list of cipher suites or cipher families. To disable a cipher suite or cipher family, precede the name with “!”.

The default TLS cipher list which is `HIGH: !ADH: !AECDH: !KDH: !KECDH: !PSK: !SRP` is used when no TLS cipher list is present in the masthead.

Starting from Version 9.5.23 and later, the default TLS cipher list, used when no TLS cipher list is present in the masthead, is `HIGH: !ADH: !AECDH: !KDH: !KECDH: !KRSA: !PSK: !SRP: !SHA1`

This defines the master set of TLS cipher suites from which you can select. Cipher suites that are not in this master set are either insecure or incompatible with the BigFix components. In addition, the TLS cipher list must include at least one cipher suite using RSA key exchange for the BigFix HTTPS servers. The following BESAdmin commands help you create the TLS cipher list:

testTLSCipherList

To test if a particular TLS cipher list is compatible with the BigFix components, run the following command:


```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password> /testTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

For example:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=C:\licenses\license.pvk /sitePvkPassword=bigfix /testTLSCipherList="TLSv1.2:!ADH:!AECDH:!kDH:!kECDH:!PSK:!SRP:!NULL"
```

If the command runs successfully, BESAdmin provides a detailed list of all TLS cipher suites that are enabled. If unsuccessful, BESAdmin provides a detailed list of which cipher suites are insecure or incompatible.

setTLSCipherList

After identifying a suitable TLS cipher list, you can set it with the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password> /setTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

For example:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=C:\licenses\license.pvk /sitePvkPassword=bigfix /setTLSCipherList="TLSv1.2:!ADH:!AECDH:!kDH:!kECDH:!PSK:!SRP:!NULL"
```

If the command is unsuccessful, BESAdmin provides a detailed list of which cipher suites are insecure or incompatible. The ciphers on the list are arranged in an order of preference. To modify the order by key length, add @STRENGTH.



Note: BESAdmin does not verify if the name of a particular cipher suite or cipher family is available; it only checks the final set of TLS cipher suites that is implied by the colon delimited list.

listTLSCiphers

For a detailed list of all the TLS ciphers that are currently enabled, run the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password> /listTLSCiphers
```

For example:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=C:\licenses\license.pvk /sitePvkPassword=bigfix /listTLSCiphers
```

removeTLSCipherList

To remove a TLS cipher list from the deployment masthead and return to the default cipher list, run the following command:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=<path+license.pvk> /sitePvkPassword=<password> /removeTLSCipherList
```

For example:

```
.\BESAdmin.exe /securitysettings /sitePvkLocation=C:\licenses\license.pvk /sitePvkPassword=bigfix /removeTLSCipherList
```

The detailed ciphers that are available for a given cipher family depends on the version of OpenSSL that is in use. At its core, the TLS cipher list is the OpenSSL cipher string. For more details, see [OpenSSL Cryptography and SSL/TLS Toolkit](#). Do not use this feature if you are not familiar with the basics of TLS cryptography.

BESAdmin Linux Command Line

The BigFix Server installer places the script to run the BigFix Administration Tool, `BESAdmin.sh`, in the `/opt/BEServer/bin` directory.

With this tool you can edit the masthead file, check the signatures of the objects in the database, enable and disable enhanced security, resign all of the users content in the

database, rotate the server private key, configure the Console and Web Reports login, resign the database content, and synchronize the masthead with the updated license.

Run this script, as super user from the command prompt, using the following syntax:

```
./BESAdmin.sh -service {arguments}
```

where *service* can be one of the following:

```
audittrailcleaner  
changeprivatekeypassword  
createwebuicredentials  
editmasthead  
findinvalidactions  
findinvalidsignatures  
importlicense  
minimumsupportedclient  
minimumsupportedrelay  
propagateoperatorsites  
propertyidmapper  
removecomputers  
repair  
reportencryption  
resetdatabaseepoch  
resignsecuritydata  
revokewebuicredentials  
rotateserversigningkey  
securitysettings  
setadvancedoptions  
setproxy  
syncmastheadandlicense  
testproxyconnection  
updatepassword
```



Note: The notation `<path+license.pvk>` used in the command syntax stands for `path_to_license_file/license.pvk`.

Each service has the following *arguments*:

audittrailcleaner

You can run this service to remove historical data from the bfenterprise database that is stored to serve as an audit trail. This audit trail slowly increases in size over the lifetime of a BigFix deployment. The audit trail contains deleted and earlier versions of Fixlets, tasks, baselines, properties, mailbox files, actions, and analyses. The audit trail is not used by BigFix in any way and can be deleted to reduce the database size. BigFix recommends that you create a historic archive of the current database and save it to a secure location before running this tool to preserve the audit trail, thus removing it from the product database, but not completely deleting the history.

The service can count and delete the following sets of data:

- **Older Versions of Custom Authored Content** (`-oldcontent`): Every edit to Fixlets, Tasks, Baselines, and Analyses, creates a new version, the earlier versions can be deleted.
- **Older Versions of Actions** (`-oldactions`): Any time you stop or start an Action, a new version is created; the earlier versions can be deleted.
- **Older Versions of relay.dat** (`-oldrelaydatfile`): Any time you install or uninstall a new relay, a new version is created; the earlier versions can be deleted.
- **Deleted Custom Authored Content (all versions)** (`-deletedcontent`): When you delete a Fixlet, Task, Baseline, and Analysis using the console, the data is marked as deleted in the database and preserved. The deleted content, including all of the earlier versions, and the corresponding client reports can be deleted.
- **Deleted Actions(all versions)** (`-deletedactions`): When you delete an action using the console, the data is marked as deleted in the database

and preserved. The deleted actions, including all of the earlier versions, and the corresponding client reports can be deleted.

- **Useless Action Results** (`-uselessactionresults`): Earlier versions of Endpoint Manager (before BigFix 7.2.4.60) might cause clients to report ActionResults that were not used in any way but would use up space in the database. These useless ActionResults can be deleted.
- **Orphaned sub-actions** (`-orphanedsubactions`): From multiple action groups that were deleted.
- **Hidden Manual Computer Group Actions** (`-hiddenactions`): Manual Computer Groups create hidden actions that add and remove computers to and from groups and the actions can build up over time. This option deletes actions after an expiration period (default 180 days) from when they were created.
- **Older Version of Mailbox Files** (`-deletedmailbox`): Deleted Mailbox Files are stored in a table in the database and can be removed.
- **Synchronizing BES Consoles** (`-synconsoles`): The BigFix Console maintains a local cache of the database that becomes not synchronized when data is removed with this tool. To prevent this situation from happening, the tool sets a flag in the database to force all BigFix Consoles to reload the cache when the Console is started up.
- **Removing data older than** (`-olderthan`): Removes data earlier than a specified date. The default value is 99 days.
- **Batched deletion** (`-batchsize`): Deleting large sets of data causes the SQL transaction log to quickly increase in size, the log becomes temporarily larger than the data being removed until the database is shrunk. Batched deletion removes results in sets.

The syntax of this service changes depending on the action you specify:

```
./BESAdmin.sh -audittrailcleaner { -displaysettings | -run [delete_data_options] |
```

```

        -schedule [delete_data_options] [scheduling options] |
-preview [delete_data_options]
        [preview options] }

```

```
./BESAdmin.sh -audittrailcleaner -displaysettings
```

```

./BESAdmin.sh -audittrailcleaner -run [ -oldcontent ] [ -oldactions ]
        [ -oldrelaydatfile ] [ -deletedcontent ] [ -deletedactions ]
        [ -uselessactionresults ] [ -orphanedsubactions ] [ -hiddenactions=<days> ]
        [ -deletedmailbox ] [ -synconsoles ] [ -olderthan=<days> ] [ -batchsize=<size> ]

```

```

./BESAdmin.sh -audittrailcleaner -sitePvkLocation=<path+license.pvk>
        [ -sitePvkPassword=<password> ] -schedule
[ [ -oldcontent ] [ -oldactions ]
        [ -oldrelaydatfile ] [ -deletedcontent ] [ -deletedactions ]
        [ -uselessactionresults ]
        [ -orphanedsubactions ] [ -hiddenactions=<days> ] [ -deletedmailbox ]
        [ -synconsoles ]
        [ -olderthan=<days> ] [ -batchsize=<size> ] [ -cleanstarttime=<yyyymmdd:hhmm>
        [ -cleanperiodicinterval=<hours> ] ] | -disable ]

```

```

./BESAdmin.sh -audittrailcleaner -preview [ [ -oldcontent ] [ -oldactions ] [
        -oldrelaydatfile ] [ -deletedcontent ] [ -deletedactions ]
        [ -uselessactionresults ] [

```

```
-orphanedsubactions ] [ -hiddenactions=<days> ] [ -deleted
mailbox ] [ -olderthan=<days> ]
| [ -scheduled ] ]
```

where:

- **displaysettings** shows the settings that are previously defined with the **schedule** action.
- **run** runs the tool with the specified settings. Before you use this option, check the settings that affect the database by using the **preview** action.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the **-disable** option.
- **preview** shows the number of database rows that are affected by the specified settings. If no setting is passed to the preview option, the preview performs the count by setting all options to true and using the default values for dates. Use the **-scheduled** option to preview the scheduled settings.

For information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

changeprivatekeypassword

You can use this service to be prompted for a new password to associate to the `license.pvk` file. Use the following syntax to run the command:

```
./BESAdmin.sh -changeprivatekeypassword -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ]
```

createwebuicredentials

Use this service to generate the certificates used as WebUI credentials. Use the following syntax to run the command:

```
./BESAdmin.sh -createwebuicredentials
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password> -webUICertDir=<path>
-webUIHostname=<WebUIHostnameOrIP>
```

This service generates a folder named `cert_WebUIHostnameOrIP` in the path specified by the **webUICertDir** option.

webUICertDir

Specifies the path to the parent folder of the new folder containing the certificates. This folder must exist.

webUIHostname

Specifies the hostname or IP address of the computer that will host your WebUI.



Note: If you need to generate WebUI credentials certificates, but you have no WebUI in your deployment, then set:

webUICertDir

To the BigFix server folder (`/var/opt/BEServer`).

webUIHostname

To the BigFix server IP address or hostname.

editmasthead

You can edit the masthead file by specifying the following parameters:

```
advGatherSchedule (optional, integer)
values:
    0=Fifteen Minutes,
    1=Half Hour, 2=Hour,
    3=Eight Hours,
    4=Half day,
```



```

    5=Day,
    6=Two Days,
    7=Week,
    8=Two Weeks,
    9=Month,
    10=Two Months
advController (optional, integer)
values:
    0=console,
    1=client,
    2=nobody
advInitialLockState (optional, integer)
values:
    0=Locked,
    1=timed (specify duration),
    2=Unlocked
advInitialLockDuration (optional, integer)
values:
    ( duration in seconds )
advActionLockExemptionURL (optional, string)
advRequireFIPSCompliantCrypto (optional, boolean)
advEnableFallbackRelay (optional,boolean)
advFallbackRelay (optional, string)

```

The syntax to run this service is:

```

./BESAdmin.sh -editmasthead -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ][ -display ]
[ -advGatherSchedule=<0-10> ] [ -advController=<0-2> ]
[ -advInitialLockState=<0|2> | -advInitialLockState=1
-advInitialLockDuration=<num> ] [ -advActionLockExemptionURL=<ur
l> ]

```

```
[ -advRequireFIPSCompliantCrypto=<true|false> ] [ -advEnableFallbackRelay=0 |  
-advEnableFallbackRelay=1 -advFallbackRelay=<host> ]
```

For additional information, see *Editing the Masthead on Linux systems in the BigFix Configuration Guide*.

findinvalidactions

You can check for invalid actions in the database by specifying the following parameter:

- (Optional) `-deleteInvalidActions`: Deletes invalid actions.

The syntax to run this service is:

```
./BESAdmin.sh -findinvalidactions [ -deleteInvalidActions ]  
-sitePvkLocation=<path+license.pvk> [ -sitePvkPassword=<password  
> ]
```

findinvalidsignatures

You can check the signatures of the objects in the database by specifying the following parameters:

-list (optional)

Lists all invalid signatures that `BESAdmin` finds.

-resignInvalidSignatures (optional)

Attempts to resign any invalid signatures that `BESAdmin` finds.

-deleteInvalidlySignedContent (optional)

Deletes contents with invalid signatures.

For additional information about invalid signatures, see [Resolving invalidly signed content problems in the console](#). The syntax to run this service is:

```
./BESAdmin.sh -findinvalidsignatures
[ -list | -resignInvalidSignatures | -deleteInvalidlySignedContent ]
```

importlicense

You can use this service to import an updated license. This service allows you to update the license manually in isolated BigFix environments.

```
./BESAdmin.sh -importlicense
-sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ] -licenseLocation=<path+license.crt>
```

The `license.crt` file contains the updated license to import.

minimumsupportedclient

This service defines the minimum version of the BigFix Agents that are used in your BigFix environment.



Note: Based on this setting, the BigFix components can decide when it is safe to assume the existence of newer functions across all the component in the deployment. Individual agent interactions might be rejected if the interaction does not comply with the limitations that are imposed by this setting.

The currently allowed values are:

- **0.0**, which means that no activity that is issued by BigFix Agents earlier than V9.0, such as archive files and reports uploads, is prevented from running or limited. This behavior applies also if the `minimumsupportedclient` service is not set.
- **9.0**, which means that:

- Unsigned reports, such as the reports sent by BigFix Clients earlier than V9.0, are discarded by FillDB.
- The upload of an unsigned archive file that is generated on a BigFix Client earlier than V9.0, by an **archive now** command, for example, fails.

If you ran a fresh installation of BigFix V9.5.6 or later using a BES Authorization file, by default all the BigFix Clients earlier than V9.0 are prevented from joining your environment because the `minimumsupportedclient` service is automatically set to **9.0**.

The value that is assigned to this service, if set, remains unchanged:

- If you upgraded to V9.5.6 or later.
- If you installed BigFix V9.5.6 or later using an existing masthead.

In both cases, if the service did not exist before, it will not exist afterward as well.

The current value `<VALUE>` assigned in your environment to the `minimumsupportedclient` service is displayed in the line `x-bes-minimum-supported-client-level: <VALUE>` of the masthead file. You can see the current value by running the following query on the BigFix Server from the BigFix Query Application available on the BigFix WebUI:

```
Q: following text of last ": " of line whose (it starts with
    "x-bes-minimum-supported-client-level:" ) of masthead of site "
actionsite"
```

The syntax to run this service is:

```
./BESAdmin.sh -sitePvkLocation=<path+license.pvk> [-sitePvkPass
word=<password>]
    -minimumsupportedclient=<version>.<release>
```

If you omit to specify `[sitePvkPassword=<password>]`, you are prompted to enter the password interactively when the **BESAdmin.sh** runs.

For example, if you want to state that Agents earlier than V9.0 are not supported in your BigFix environment, you can run the following command:

```
./BESAdmin.sh -sitePvkLocation=/license/license.pvk -minimumsupportedclient=9.0
```

minimumsupportedrelay

You can use this service, added with BigFix V9.5.6, to enforce specific criteria that affect the BigFix Agent registration requests. If this service is enabled, V9.5.6 Agents can continue to register to the V9.5.6 BigFix environment if their registration requests are signed and sent across the Relays hierarchy using the HTTPS protocol.



Note: Based on this service, the BigFix components can decide when it is safe to enable newer functions across all the component in the deployment. Individual agent interactions might be rejected if they do not comply with the limitations that are imposed by this setting.

The currently allowed values are:

- **0.0.0**, which means that the BigFix Server accepts and manages:
 - Signed and unsigned registration requests coming from BigFix Agents.
 - Registration requests delivered from BigFix Agents using the HTTP or the HTTPS protocols.

This behavior applies by default when you upgrade from previous versions to BigFix V9.5.6 or later. In this case, the `minimumsupportedrelay` service is not added automatically to your configuration during the upgrade.

- **9.5.6** or later, which means that:

- The BigFix Server enforces that registration requests coming from BigFix Agents V9.5.6 or later must be properly signed.
- The BigFix Server and the Relays V9.5.6 or later enforce the use of the HTTPS protocol when BigFix Agent registration data is exchanged.

Enforcing this behavior has the following side effects:

- BigFix Agents earlier than V9.0 cannot send registration requests to the BigFix Server because they cannot communicate using the HTTPS protocol.
- Because BigFix Relays with versions earlier than V9.5.6 cannot handle correctly signed registration requests, any BigFix Client that uses those Relays might be prevented from continuing to register, or might fall back to a different parent Relay or directly to the Server.

If you ran a fresh installation of BigFix V9.5.6 or later using a License Authorization file, be aware that the side effects that were just listed apply to your BigFix deployment because, in this particular installation scenario, the `minimumsupportedrelay` service is automatically set to **9.5.6** by default.

The current value `<VALUE>` assigned in your environment to the `minimumsupportedrelay` service is displayed in the line `x-bes-minimum-supported-relay-level: <VALUE>` of the masthead file. You can see the current value by running the following query on the BigFix Server from the BigFix Query Application available on the BigFix WebUI:

```
Q: following text of last ": " of line whose (it starts with
"x-bes-minimum-supported-relay-level:" ) of masthead of site "ac
tionsite"
```

This query displays a value only when `<VALUE>` is set to **9.5.6**; if it is set to **0.0.0**, it does not display a value.

The syntax to run this service is:

```
./BESAdmin.sh -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>]
               -minimumsupportedrelay=<version>.<release>.<modification>
```

If you omit to specify [sitePvkPassword=<password>], you are prompted to enter the password interactively when the **BESAdmin.sh** runs.

For example, if you want that only the registration requests that are signed and carried through HTTPS are managed by your BigFix Server, you can run the following command:

```
./BESAdmin.sh -sitePvkLocation=/license/license.pvk -minimumsupportedrelay=9.5.6
```

propagateoperatorsites

This service forces the server to propagate a new version of the operator sites. This command is useful after a server migration because you can be sure that data is available for clients to gather and it prevents from failures. This is the command syntax:

```
./BESAdmin.sh -propagateoperatorsites { -propagateAllOperatorSites |
                                         -propagateOperatorSite=<MastheadUsername> }
```

propertyidmapper

This service creates, updates, and deletes a table (PropertyIDMap) in the BFEEnterprise database that maps retrieved property names for the SiteID, AnalysisID, PropertyID used to reference properties in the QUESTIONRESULTS and LONGQUESTIONRESULTS tables. It creates the PropertyIDMap table if it does not exist (requires table creation permissions). This service must be run to update the PropertyIDMap table after creating or deleting a property.

The general syntax of this service is the following:

```
./BESAdmin.sh -propertyidmapper { -displaysettings | -run [property_idmapper_options]
```

```
| -schedule [property_idmapper_options] [scheduling options] }
```

The syntax of this service changes depending on the action you specify:

```
./BESAdmin.sh -propertyidmapper -displaysettings
```

```
./BESAdmin.sh -propertyidmapper -run [ -createtable ] [ -removetable ]  
[ -lookupproperty=<propertyname> ]
```

```
./BESAdmin.sh -propertyidmapper -schedule [ -createtable -starttime=<yyyymmdd:hhmm>  
[ -interval=<hours> ] | -disable ]
```

where:

- **displaysettings** shows the settings that are previously set with the `schedule` action.
- **run** runs the tool with the specified settings. Before you use this option, check the settings that affect the database by using the `preview` action.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the `-disable` option.

For more information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

removecomputers

The service runs database operations for the following sets of data:

- **Expired Computers** (`-deleteExpiredComputers`) Marks computers as *deleted* if they did not report in recently.
- **Deleted Computers** (`-purgeDeletedComputers`): Physically deletes the computer related data from the database for computers that are

already marked as deleted and have not reported in for a long time. It deletes the data related to an agent (such as the action results or the properties, and so on), not the agent itself that remains logically deleted (`IsDeleted = 1`) on the database. Therefore, as a consequence, if the same agent becomes active again, it is recognized and will reuse its previous computer ID.

- **Duplicate Computers** (`-deleteDuplicatedComputers`): Marks older computers as deleted if a computer exists with the same computer name.
- **Removal of deleted Computers** (`-removeDeletedComputers`): Physically deletes the computer information from the database for computers that are marked as deleted (`IsDeleted = 1`) since at least the indicated number of days (minimum 30). It deletes the information of the agent itself (such as the computer ID, and so on). Therefore, as a consequence, if the same agent becomes active again, a totally new computer ID will be assigned to the agent.
- **Removal of uploaded Files** (`-removeDeletedUploads`): Physically removes from the database the definition of uploaded files that are marked as deleted.
- **Removal of uploaded files of removed computers** (`-eraseUploadFilesForRemovedComputers`): Physically removes from the BigFix server filesystem all files uploaded by clients whose definition has been removed from the database.
- **Removal of Computers by name** (`-removeComputersFile`): Accepts a text file with a list of computer names that are separated by new lines and removes them from the deployment.

The general syntax of this service is:

```
./BESAdmin.sh -removecomputers { -displaySettings | -run [remove_computers_options]
```

```

        | -schedule [remove_computers_options] [scheduling option
s]
        | -preview [remove_computers_options] [preview options] }

```

Depending on the action that is specified, the syntax changes as follows:

```
./BESAdmin.sh -removecomputers -displaySettings
```

```

./BESAdmin.sh -removecomputers -run [ -deleteExpiredComputers=<d
ays> ]
    [ -removeDeletedComputers=<days> ] [ -removeDeletedUploads ]
    [ -eraseUploadFilesForRemovedComputers ]
    [ -purgeDeletedComputers=<days> ]
    [ -deleteDuplicatedComputers [ -duplicatedPropertyName=<Prop
ertyName> ] ]
    [ -removeComputersFile=<path> ] [ -batchSize=<batch size> ]

```

```

./BESAdmin.sh -removecomputers -schedule [ [ -deleteExpiredCompu
ters=<days> ]
    [ -removeDeletedComputers=<days> ] [ -removeDeletedUploads ]
    [ -eraseUploadFilesForRemovedComputers ]
    [ -purgeDeletedComputers=<days> ]
    [ -deleteDuplicatedComputers [ -duplicatedPropertyName=<Prop
ertyName> ] ]
    [ -removeStartTime=<YYYYMMDD:HHMM> [ -removePeriodicInterval
=<Hours> ] ]
    [ -batchSize=<batch size> ] | -disable ]

```

```

./BESAdmin.sh -removecomputers -preview [ [ -deleteExpiredComput
ers=<days> ]
    [ -removeDeletedComputers=<days> ] [ -removeDeletedUploads ]
    [ -eraseUploadFilesForRemovedComputers ]
    [ -purgeDeletedComputers=<days> ] [ -deleteDuplicatedComputer
s

```

```
[ -duplicatedPropertyName=<PropertyName> ] ] |
[ -scheduled ] ]
```

where:

- **displaySettings** shows the settings that are previously set with the `schedule` action.
- **run** runs the tool with the specified settings. Before you use this option, check the settings that affect the database by using the `preview` action.
- **schedule** schedules the tool to run at the specified time at each specified interval. To disable the schedule action, use the `-disable` option.
- **preview** shows the number of database rows that are affected by the specified settings. If no setting is passed to the preview option, the preview performs the count by setting all options to true and using the default values for dates. Use the `-scheduled` option to preview the scheduled settings.



Note: When using option `-removeDeletedComputers`, the number of days must be not less than 30.

For more information about the cleanup tasks log files, see [Logging Cleanup Tasks Activities \(on page 350\)](#).

repair

You can use this command to handle an inconsistency between the keys that are stored in the database and the keys stored on the filesystem.

```
./BESAdmin.sh -repair -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ]
```

If the keywords `ServerSigningKey` and `ClientCAKey` do not exist, they are created under `/var/opt/BESServer`: This command also updates the licenses of sites.

reportencryption

You can generate, rotate, enable, and disable encryption for report messaging by running:

```
./BESAdmin.sh -reportencryption { -status |
    -generatekey [-privateKeySize=<min|max>]
                  [-deploynow=yes | -deploynow=no -outkeypath=<path>]
    -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>] |
    -rotatekey [-privateKeySize=<min|max> ]
               [-deploynow=yes | -deploynow=no
               -outkeypath=<path> ]
               -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>] |
    -enablekey -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>] |
    -disable -sitePvkLocation=<path+license.pvk> [-sitePvkPassword=<password>] }
```

where:

status

Shows the status of the encryption and which arguments you can use for that status.

generatekey

Allows you to generate a new encryption key.

rotatekey

Allows you to change the encryption key.

enablekey

Allows you to enable the encryption key.

disable

Allows you to put the encryption key in PENDING state. If you run again the `reportencryption` command with the `disable` argument, the encryption changes from PENDING state to DISABLED.

deploynow=yes

Deploys the report encryption key to the server for decryption.

deploynow=no -outkeypath=<path>

The encryption key is not deployed to the server but it is saved in the `outkeypath` path.

For more information about this command and its behavior, see [Managing Client Encryption](#).

resetdatabaseepoch

To clear all console cache information in BigFix Enterprise Service V7.0 or later versions. After running this command:

```
./BESAdmin.sh -resetdatabaseepoch
```

subsequent console logins reload their cache files.

resignsecuritydata

If you get one of the following errors:

```
class SignedDataVerificationFailure
HTTP Error 18: An unknown error occurred while transferring data
from the server
```

when you try to log in to the BigFix console, you must resign all the user content in the database by entering the following command:

```
./BESAdmin.sh -resignSecurityData
```

This command resigns security data that uses the existing key file. You can also specify the following parameter:

```
-mastheadLocation=<path+actionsite.afxm>
```

The complete syntax to run this service is:

```
./BESAdmin.sh -resignsecuritydata -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ] -mastheadLocation=<path+actionsite.afxm>
```

revokewebuicredentials

You can revoke the authentication certificate of a specified WebUI instance.

The syntax to run this service is:

```
./BESAdmin.sh -revokewebuicredentials -hostname=<host> -sitePvkLocation=<path+license.pvk> -sitePvkPassword=<pvk_password>
```

If an authentication certificate is issued for the specified `hostname`, this certificate is revoked and the WebUI instance running on that `hostname` can no longer connect to the root server.

After revoking the credentials for a WebUI host, it will no longer connect to the root server. You can either remove the WebUI installation, or generate new credentials for that host, and replace the old certificate files on that host.

rotateserversigningkey

You can rotate the server private key to have the key in the file system match the key in the database. The command creates a new server signing key, resigns all existing content that uses the new key, and revokes the old key.

The syntax to run this service is:

```
./BESAdmin.sh -rotateserversigningkey -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ]
```

securitysettings

You can configure enhanced security options to follow the NIST security standards by running the command:

```
./BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk>
[ -sitePvkPassword=<password> ]
{ -status | -enableEnhancedSecurity [-requireSHA256Downloads]
| -disableEnhancedSecurity | -requireSHA256Downloads | -allowSHA1Downloads}
[ -testTLSCipherList | -setTLSCipherList | -listTLSCiphers | -removeTLSCipherList ]
[ -hideFromFieldFromMasthead | -showFromFieldFromMasthead ]
```

where:

status

Shows the status of the security settings set in your BigFix environment.

Example:

```
./BESAdmin.sh -securitysettings
-sitePvkLocation=/root/backup/license.pvk
-sitePvkPassword=mysw0rd -status
```

```
Enhanced security is currently ENABLED
SHA-256 downloads are currently OPTIONAL
```

enableEnhancedSecurity | disableEnhancedSecurity

Enables or disables the enhanced security that adopts the SHA-256 cryptographic digest algorithm for all digital signatures and content verification and the TLS 1.2 protocol for communications among the BigFix components.



Warning: If you use the **enableEnhancedSecurity** setting you break the compatibility with an earlier version because BigFix version 9.0 or earlier components cannot communicate with the BigFix version 9.5 server or relays. When you disable the enhanced security mode, the BESRootServer service fails to restart automatically. To solve the problem, restart the service manually.

For more information about the BigFix Enhanced Security feature and the supported security configuration, see Security Configuration Scenarios.

requireSHA256Downloads

Ensures that data has not changed after you download it using the SHA-256 algorithm.



Note: The **Require SHA-256 Downloads** option is available only if you selected to **Enable Enhanced Security**.

allowSHA1Downloads

Ensures that the file download integrity check is run using the SHA-1 algorithm.

testTLSCipherList | setTLSCipherList | listTLSCiphers | removeTLSCipherList

To test if a TLS cipher list is compatible with the BigFix components, run the following command:


```

/BESAdmin.sh -securitysettings
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
-
testTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
>

```

After identifying a suitable TLS cipher list, you can set it by running the following command:

```

/BESAdmin.sh -securitysettings
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
-
setTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>

```

To list all the TLS ciphers that are currently enabled, run the following command:

```

/BESAdmin.sh -securitysettings
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
-listTLSCiphers

```

To remove a TLS cipher list from the deployment masthead and return to the default cipher list, run the following command:

```

/BESAdmin.sh -securitysettings
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
-removeTLSCipherList

```

-hideFromFieldFromMasthead | -showFromFieldFromMasthead

You can specify if you want to show or hide the value displayed by the From field in the masthead which contains the email

address of the license assignee. During a fresh installation the value is hidden and the option "hideFromFieldFromMasthead" is set to 1. During an upgrade the value remains unchanged. For example, if you want to hide the value, run the command as follows:

```
./BESAdmin.sh -securitysettings
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
-hideFromFieldFromMasthead
```

setadvancedoptions

You can list or configure any global settings that apply to your particular installation. The complete syntax to run this service is:

```
./BESAdmin.sh -setadvancedoptions -sitePvkLocation=<path+license
.pvk>
[-sitePvkPassword=<password>]
{ -list | -display
| [ -f ] -delete option_name
| [ -f ] -update option_name=option_value }
```

For example:

- To customize the Console or Web Report login banner, enter following command:

```
./BESAdmin.sh -setadvancedoptions -sitePvkLocation=/root/ba
ckup/license.pvk
-sitePvkPassword=pippo000 -update loginWarningBanner='new m
essage'
```

- If your BigFix Server is V9.5.7 or later, to avoid having duplicate computer entries when the endpoints are detected as possible clones by the Server, run the following command:

```
./BESAdmin.sh -setadvancedoptions -sitePvkLocation=/root/back  
up/license.pvk  
-sitePvkPassword=pippo000 -update clientIdentityMatch=100
```

For a list of available options that you can set, see [List of advanced options](#).

setproxy

If your enterprise uses a proxy to access the Internet, you must set a proxy connection to enable the BigFix server to gather content from sites and to do component-to-component communication or to download files.

For more information about how to run the command and about the values to use for each argument, see [Setting a proxy connection on the server \(on page 427\)](#).

syncmastheadandlicense

When you upgrade the product, you must use this option to synchronize the update license with the masthead and resign all content in the database with SHA-256. The syntax to run this service is:

```
./BESAdmin.sh -syncmastheadandlicense -sitePvkLocation=<path+lic  
ense.pvk>  
[ -sitePvkPassword=<password>]
```

testproxyconnection

You can test the proxy connection. The syntax to run this service is:

```
BESAdmin.sh -testproxyconnection -proxyHost=<host> [ -proxyPort=  
<port> ]
```

```
[ -proxyUser=<user> -proxyPassword=<pass> ] [ -proxyExcList=<list> ] [ -proxyAuthMeth=<method> ]
[ -proxySecTunnel=<true|false> ] [ -fips ]
```

updatepassword

You can modify the password that is used for authentication by product components in specific configurations. The syntax to run this service is:

```
./BESAdmin.sh -updatepassword -type=<server_db|dsa_db>
[-password=<password>] -sitePvkLocation=<path+license.pvk>
[-sitePvkPassword=<pvk_password>]
```

where:

-type=server_db

Specify this value to update the password that is used by the server to authenticate with the database.

If you modify this value, the command restarts all the BigFix server services.

-type=dsa_db

Specify this value to update the password that is used in a DSA configuration by a server to authenticate with the database.

The settings `-password` and `-sitePvkPassword` are optional, if they are not specified in the command syntax their value is requested interactively at run time. The password set by this command is obfuscated.

Working with TLS cipher lists

All network communications between the BigFix components and the internet are encrypted by using the TLS protocol standard. Starting from Version 9.5.11, master operators can control which TLS ciphers should be used for encryption. A master operator can set a deployment-wide TLS cipher list in the masthead by using BESAdmin.

The TLS cipher list is a colon-delimited list of cipher suites or cipher families. To disable a cipher suite or cipher family, precede the name with “!”.

The default TLS cipher list which is `HIGH:!ADH:!AECDH:!kDH:!kECDH:!PSK:!SRP` is used when no TLS cipher list is present in the masthead.

Starting from Version 9.5.18 and later, the default TLS cipher list, used when no TLS cipher list is present in the masthead, is `HIGH:!ADH:!AECDH:!kDH:!kECDH:!kRSA:!PSK:!SRP`.

This defines the master set of TLS cipher suites from which you can select. Cipher suites that are not in this master set are either insecure or incompatible with the BigFix components. In addition, the TLS cipher list must include at least one cipher suite using RSA key exchange for the BigFix HTTPS servers. The following BESAdmin commands help you create the TLS cipher list:

testTLSCipherList

To test if a particular TLS cipher list is compatible with the BigFix components, run the following command:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk>
-k> -sitePvkPassword=<password>
-testTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

For example:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=/opt/BESInstallFiles/
license.pvk -sitePvkPassword=bigfix -testTLSCipherList='TLSv1.2:!ADH:!AECDH:!kDH:!kECDH:!PSK:!SRP:!NULL'
```

If the command runs successfully, BESAdmin provides a detailed list of all TLS cipher suites that are enabled. If unsuccessful, BESAdmin provides a detailed list of which cipher suites are insecure or incompatible.



Note: In bash, “!” is treated as a special character. You must either escape it with “\” or enclose it within single quotes “’”. Double quotes “”” are insufficient.

setTLSCipherList

After identifying a suitable TLS cipher list, you can set it with the following command:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk> -sitePvkPassword=<password> -setTLSCipherList=<cipher_1>:<cipher_2>:...:<cipher_n>
```

For example:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=/opt/BESInstallFiles/license.pvk -sitePvkPassword=bigfix -setTLSCipherList='TLSv1.2:!ADH:!AECDH:!kDH:!kECDH:!PSK:!SRP:!NULL'
```

If the command is unsuccessful, BESAdmin provides a detailed list of which cipher suites are insecure or incompatible. The ciphers on the list are arranged in an order of preference. To modify the order by key length, add @STRENGTH.



Note: BESAdmin does not verify if the name of a particular cipher suite or cipher family is available; it only checks the final set of TLS cipher suites that is implied by the colon delimited list.

listTLSCiphers

For a detailed list of all the TLS ciphers that are currently enabled, run the following command:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk> -sitePvkPassword=<password> -listTLSCiphers
```

For example:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=/opt/BESInstallFiles/license.pvk -sitePvkPassword=bigfix -listTLSCiphers
```

removeTLSCipherList

To remove a TLS cipher list from the deployment masthead and return to the default cipher list, run the following command:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=<path+license.pvk> -sitePvkPassword=<password> -removeTLSCipherList
```

For example:

```
/BESAdmin.sh -securitysettings -sitePvkLocation=/opt/BESInstallFiles/license.pvk -sitePvkPassword=bigfix -removeTLSCipherList
```

The detailed ciphers that are available for a given cipher family depends on the version of OpenSSL that is in use. At its core, the TLS cipher list is the OpenSSL cipher string. For more details, see [OpenSSL Cryptography and SSL/TLS Toolkit](#). Do not use this feature if you are not familiar with the basics of TLS cryptography.

Logging Cleanup Tasks Activities

You can run the cleanup tasks, on the BigFix Server:

On Windows systems:

From the Clean Up tab of the BigFix Administration Tool, or from the command line using the `BESAdmin.exe` program as described in [BESAdmin Windows Command Line \(on page 299\)](#).

On Linux systems:

From the command line using the `BESAdmin.sh` bash shell script as described in [BESAdmin Linux Command Line \(on page 321\)](#).

By default the information about the processing of the cleanup tasks is logged in the following files:

- `/var/log/BESTools.log` on Linux systems.
- `C:\Program Files (x86)\BigFix Enterprise\BES Server\BESTools.log` on Windows systems.

and the maximum size of the log file is 5 MB. When the size exceeds that value the log file rotates.



Note: The **BESTools.log** file was introduced with BigFix Version 9.5 Patch 5.

You can use the configuration settings `_BESTools_Logging_LogPath` and `_BESTools_Logging_LogMaxSize` to specify a different path and a different maximum size for logging the cleanup tasks activities.

The same log file is used both when you run the tools using BESAdmin and when you schedule them in the RootServer.

Chapter 12. Post-installation configuration steps

After having run the installation, make sure that you read the following topics and run the requested activities if needed.


Post-installation steps

After you install the product, perform these steps to verify that the installation run successfully and to complete the basic configuration steps.

1. Run the following step to verify that the installation run successfully:

On Windows:

From **Start > All Programs > BigFix** run the BigFix Server Diagnostics tool to verify that all the installation and configuration steps completed successfully.

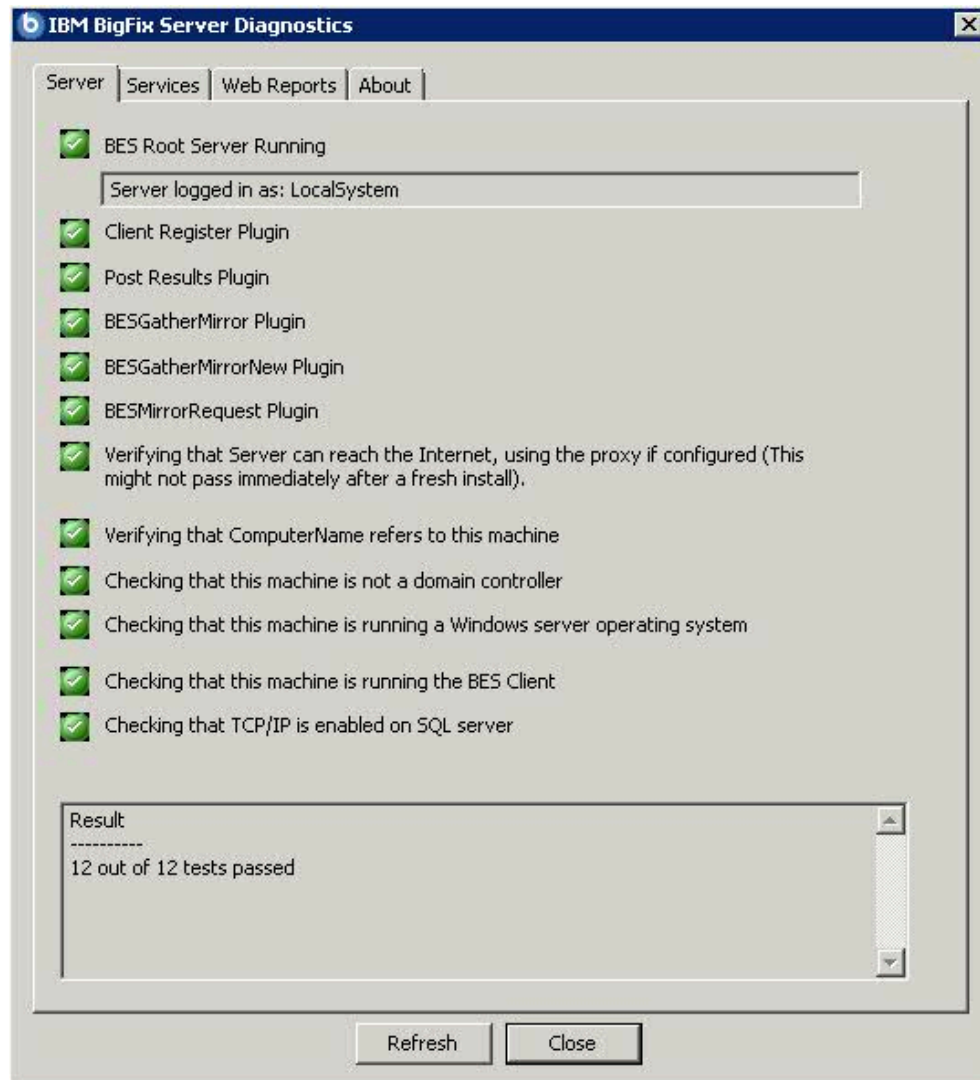

If all the buttons are green, click **Close** to exit the Diagnostic tool, otherwise address the problem to be sure that the server is working correctly.


On Linux:

Ensure that the following services are up and running:


```
besfilldb
besgatherdb
besserver
beswebreports
```

Use the command `service service status` to check the status of the services.


2. Open the BigFix console and verify that the client is registered.

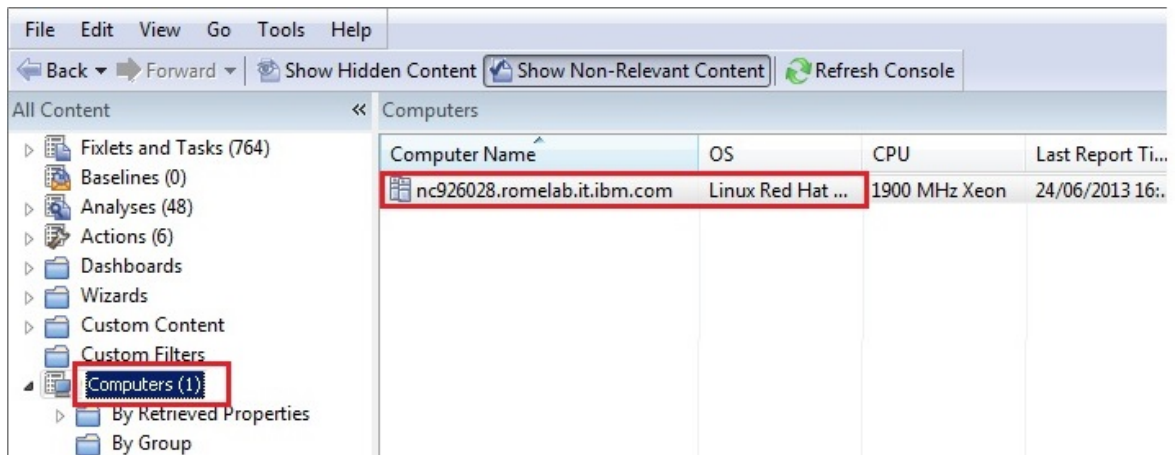

3. From the console, verify that the **All Content** and **BigFix Management** domains have been created.

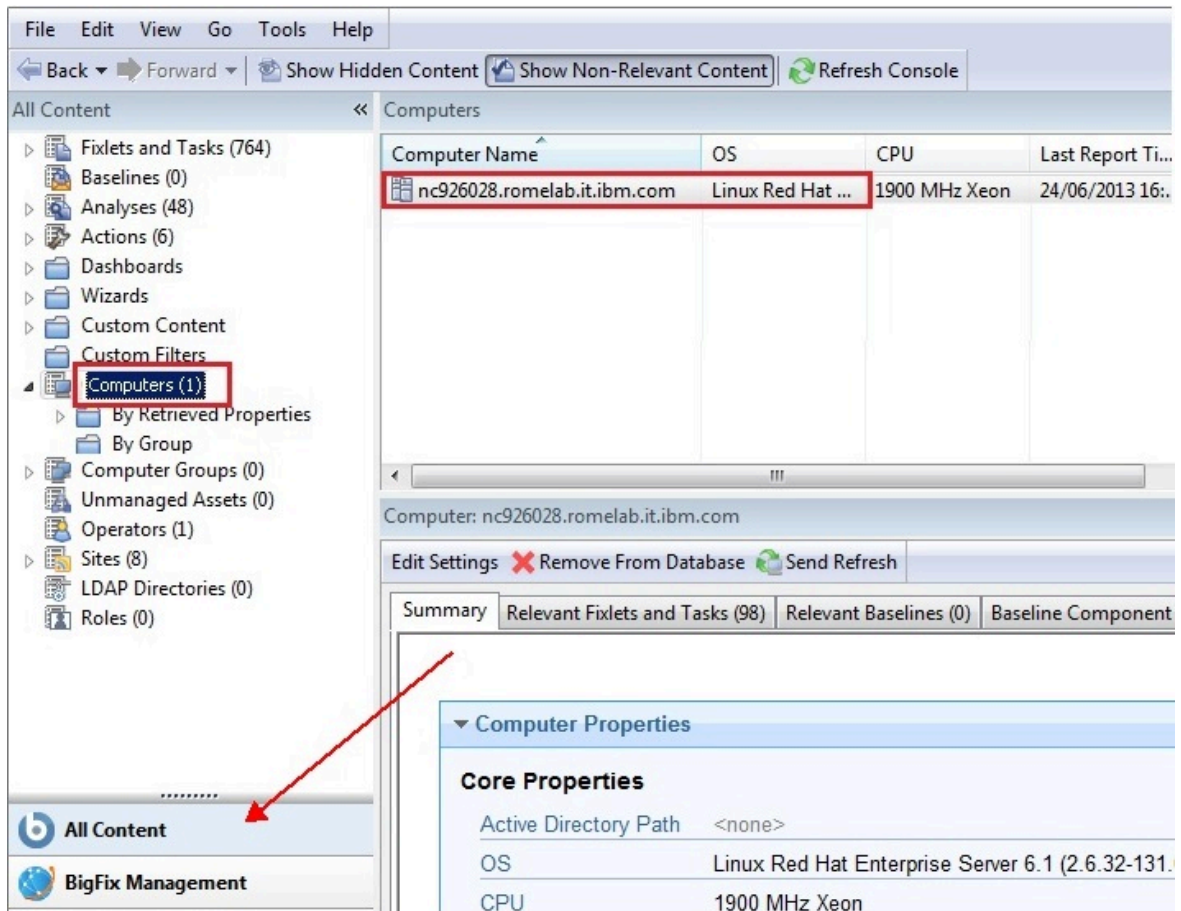


4. After installation, the program is automatically set up to subscribe to certain management and maintenance sites. Depending on the terms of your license, you might have subscriptions to other sites as well. In this way content from those Sites automatically flows into your enterprise and is evaluated for relevance on all computers running the BigFix client. Subscribe to these sites from the **BigFix Management** domain, by selecting the **License Overview** dashboard:

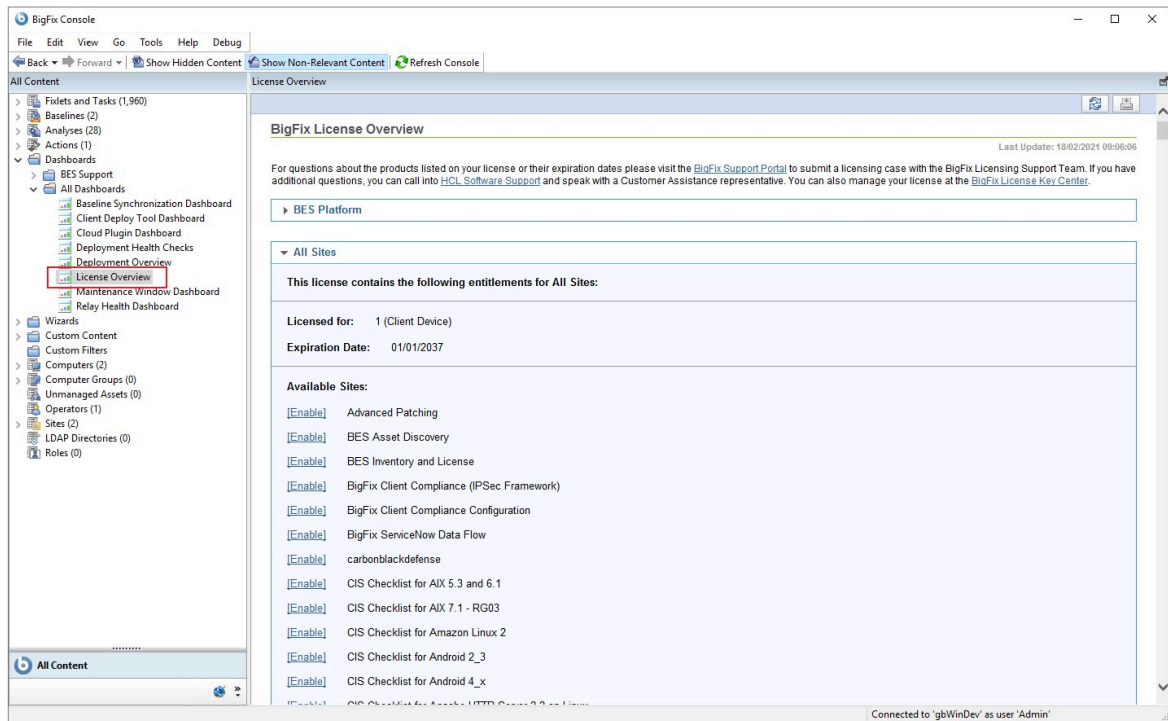

The License Overview dialog appears, listing available sites.

5. Enable the entitled sites by clicking the **Enable** button associated with the site to which you want to subscribe:

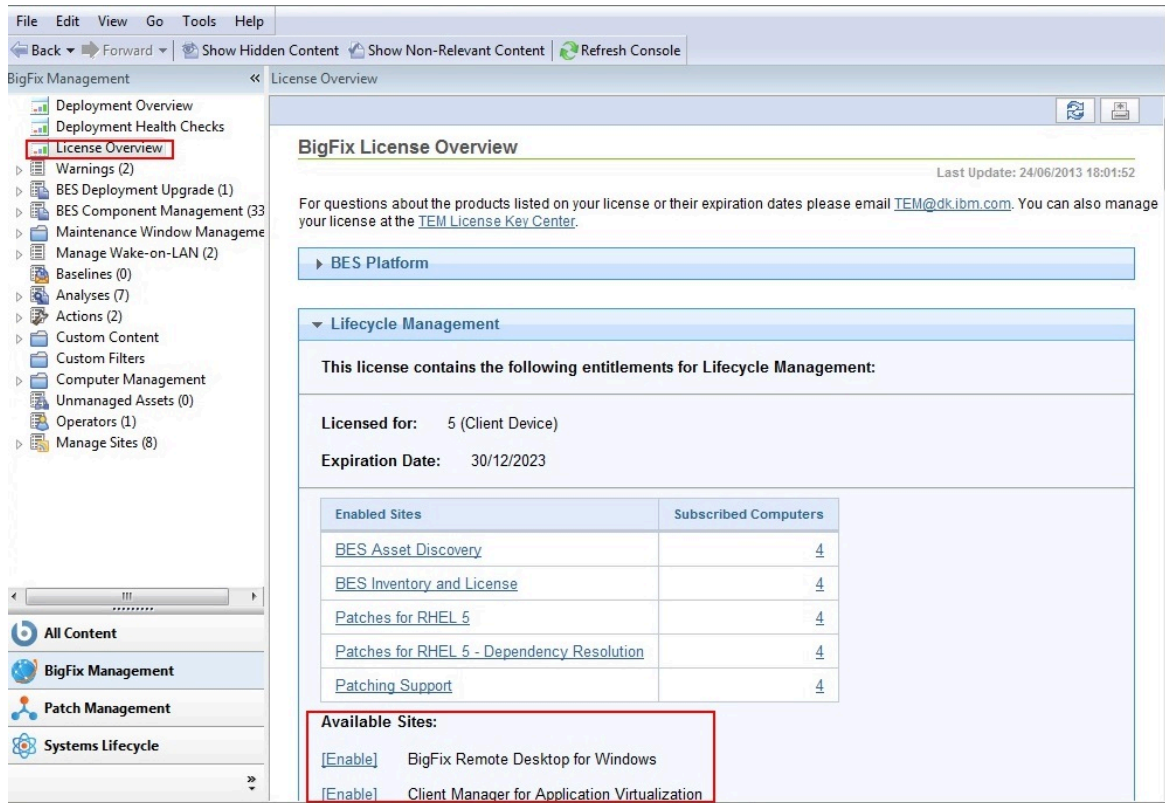

6. Enter your password to subscribe to the site. The new site is now listed in the **Manage Sites** node of the domain panel. You can also subscribe to a site by using a masthead file.
7. Open the **Manage Sites** node and select your newly subscribed site.
8. From the site dialog, click the **Computer Subscriptions** tab to assign the site to the appropriate computers
9. From the **Operator Permissions** tab, select the operators you want to associate with this site and their level of permission.
10. Click Save Changes when you are done.

You can now use the product.

Starting and stopping the BigFix server

Complete the following steps to start and stop the BigFix server installed on a Windows system:

Steps to start BigFix:

Start the following Windows services in the specified order:

```
BES Root Service
BES FillDB
BES GatherDB
BES Client
BES Web Reports Service
```

Steps to stop BigFix:

Stop the following Windows services in the specified order:

```
BES Web Reports Service
BES Client
BES GatherDB
BES FillDB
BES Root Service
```

Complete the following steps to start and stop the BigFix server installed on a Linux system:

Steps to start BigFix:

Run the following services in the specified order:

```
service besserver start
service besfilldb start
service besgatherdb start
service beswebreports start
service besclient start
```

Steps to stop BigFix:

Run the following services in the specified order:

```
service besclient stop
service beswebreports stop
service besgatherdb stop
```

```
service besfilldb stop  
service besserver stop
```

Subscribing to content sites

Sites are collections of Fixlets, tasks, analysis, that are created internally by you, by HCL, or by vendors. You subscribe to a site and agree on a schedule for downloading the latest batch.

You can add a new site subscription by acquiring a masthead file from a vendor or from HCL. You can subscribe to a site also by using the Licensing Dashboard.

Sites are generally devoted to a single topic, such as security or the maintenance of a particular piece of software or hardware. However, several sites can share characteristics and are then grouped into domains, which might include a set of typical job tasks of your various Console managers. For example, the person responsible for patching and maintaining a common operating environment can find Support sites and Patching sites for various operating systems all bundled into the Patch Management Domain.

You can also set up your own custom site and populate it with Fixlets that you have developed specifically for your own network. You and other operators can then send and receive the latest in-house patches and quickly deploy them to the appropriate locations and departments.

Upon installation, the program is automatically set up to subscribe to certain management and maintenance sites. Depending on the terms of your license, you might have subscriptions to other sites as well. This means that content from those sites automatically flows into your enterprise and is evaluated for relevance on all computers running the BigFix client. These sites, in turn automatically register with an appropriate domain, providing a simple way to divide the content into functional sections.

Subscribing with a masthead

To subscribe to a site using a masthead file, follow these steps:

1. Find an appropriate site. Finding a site is equivalent to finding a site masthead file, which has an extension of `.efxm`. There are several ways to do this:

Fixlet sites:

HCL might post a links list to new sites as they become available.

Fixlet subscriptions:

Sometimes a Fixlet message might offer a subscription. Click the Fixlet action to start the subscription.

Download mastheads:

You can also subscribe to a site by downloading a masthead file from a vendor's website. After the masthead is saved to your computer, you can activate it in one of the following ways:

- Double-click the masthead, or
- Select **Add External Site Masthead** from the **Tools** menu, browse the folder containing the masthead, and click **Open**.

2. You are prompted for your private key password. Type it in and click **OK**.

The masthead is propagated to all Clients, which immediately begin to evaluate the Fixlet from the new site.

Subscribing with the Licensing Dashboard

You can subscribe to a Fixlet site also by using the Licensing Dashboard in BigFix Management, found in the Domain Panel:

1. Open the **BigFix Management** domain and scroll to the top to view the associated dashboards.
2. From the **Licensing Dashboard**, select the sites you want to subscribe to.

Chapter 13. Managing relays

Relays can significantly improve the performance of your installation.

Relays lighten both upstream and downstream burdens on the server. Rather than communicating directly with a server, clients can instead be instructed to communicate with designated relays, considerably reducing both server load and client and server network traffic. Relays improve performance by:

- **Relieving downstream traffic.** Using relays, the BigFix server does not need to distribute files, such as patches or software packages, and Fixlets to every Client. Instead, the file is sent once to the relay, which in turn distributes it to the clients.
- **Reducing upstream traffic.** In the upstream direction, relays can compress and package data (including Fixlet relevance, action status, and retrieved properties) from the clients for even greater efficiency.
- **Reducing congestion on low-bandwidth connections.** If you have a server communicating with computers in a remote office over a slow connection, designate one of those computers as a relay. Then, the server sends only a single copy to the relay (if it needs it). That relay, in turn, distributes the file to the other computers in the remote office over its own fast LAN.

Establishing the appropriate relay structure is one of the most important aspects of deploying BigFix to a large network. When relays are fully deployed, an action with a large download can be quickly and easily sent out to tens of thousands of computers with minimal WAN usage.

A recommended configuration is the connection of 500 - 1000 clients to each relay and the use of a parent child relay configuration.



Note: If the connection between a relay and server is unusually slow, it might be beneficial to connect the relay directly to the Internet for downloads.

BigFix deployments with internet-facing relays that are not configured as “authenticating” are prone to security threats. Security threats in this context might mean unauthorized

access to the relays and any content or actions, and download packages associated with them or to the **Relay Diagnostics** page that might contain sensitive information (for example: software, vulnerability information, and passwords). To prevent any security vulnerabilities, configure the internet-facing relays in your deployment as authenticating. For details, see [Setting up internet relays \(on page 376\)](#).

For additional information about relays, see <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/BigFix%20Relays>.

Relay requirements and recommendations

Generally, a relay uses minimal resources and does not have a noticeable impact on the performance of the computer running it.

However, if several clients simultaneously request files from a relay, a significant amount of the computer's resources might be used to serve those files.

The requirements for a relay computer vary widely depending on three main factors:

- The number of connected clients that are downloading files.
- The size of each download.
- The period of time allotted for the downloads.

The relay system requirements are similar to those for a workgroup file server. For details, see [System Requirements](#).



Note: On Linux computers in which the deployment port is not the default (52311), an installation of Perl is required for the relay functions to work as expected.

Here are some further recommendations:

- Computers running the relays must have BigFix agent installed.
- Configure the internet-facing relays in your BigFix deployment as authenticating relays.
- Workgroup file servers and other server-quality computers that are always turned on are good candidates for installing a relay.

- The BigFix relay must have a two-way TCP connection to its parent (which can be a server or another relay).
- The Fixlet to install the relay requires at least Internet Explorer 5.0 or later versions to work correctly. For BigFix Version 9.5 Patch 19 and later, this requirement is no longer needed.
- The BigFix relay cache size can be configured, but is set to 1GB by default. It is recommended that you have at least 2 GB available for the relay cache to prevent hard drive bottlenecks.
- It is recommended to have at least one Relay per geographic location for bandwidth reasons.
- Consider throttling the bandwidth usage for Relays downloading files on very slow pipes. It is recommended to throttle the bandwidth usage for Clients that are connecting on dial-up or slow VPN connections. For more information about bandwidth throttling, see <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Bandwidth%20Throttling>.

Setting up a relay

To set up a relay, you must designate a Windows, Red Hat Enterprise Linux, or Solaris computer that is running a client to act as the relay.

The BigFix clients on your network detect the new relays and automatically connect to them. To configure a client computer as a relay, run the following steps:

1. Log in to the BigFix console.
2. Open the **Fixlets and Tasks** icon in the Domain Panel and click **Tasks Only**.
3. Double-click the task labeled **Install BigFix relay** (it might include a version number after it). This task is relevant when there is at least one client that meets the requirements for the relay.
4. Choose your deployment option by selecting one of the actions in the task. You can target single or multiple computers with this action.

After the relays have been created, Clients can be made to automatically discover and connect to them, always seeking the Relay that is the fewest hops away.

Installing and upgrading a relay from the command line

You can install or upgrade a relay from the command line using the `setup.exe` installer command.

The same installer command is issued by the Install or Upgrade Relay Fixlet on the target relevant clients.

For information about the `setup.exe` syntax and the available switches, for example `/s` for silent installation, see the following [Microsoft article](#)

This is the list of additional options that you can use when using the `setup.exe` installer:

RESTARTBESCLIENT

Set it to 0 to prevent the BES Client service from restarting while installing or upgrading the relay. For example, if you want to install the relay in an unattended mode but you want to prevent the client from starting while processing you can run the following command:

```
setup.exe /s /v"RESTARTBESCLIENT=0 /qn"
```

STARTRELAYSERVICE

Set this option to 0 to prevent the BES Relay service from starting while installing or upgrading the relay. For example, if you want to install the relay in an unattended mode but you want to prevent it from starting you can run the following command:

```
setup.exe /s /v"STARTRELAYSERVICE=0 /qb"
```



Note: This option is available starting from BigFix version 9.5 Patch 3.

REBOOT

Set this option to `ReallySuppress` if you want to prevent the relay machine from rebooting. For example, if you want to install the relay in an unattended

mode but you want to prevent the system from rebooting you can run the following command:

```
setup.exe /s /v"REBOOT=ReallySuppress /qn"
```

Assigning relays to clients

When you have set up a relay you must direct BigFix clients on your network to gather from that relay, instead of from your server.

You can:

- Assign relays manually as it is described in the following topics:
 - [Assigning relay at client installation time \(on page 365\)](#)
 - [Manually assigning relays to existing clients \(on page 370\)](#)
- Assign relays automatically, that means to allow clients to identify the closest relay to connect to, as it is described in the following topics:
 - [Automatically assigning relays at client installation time \(on page 371\)](#)
 - [Automatically assigning relays to existing clients \(on page 371\)](#)

If you select this method, you can also choose to exploit the relay affiliation functionality. Using this functionality you create groups of affiliated clients and you assign relays to the affiliation group. For more information about this functionality and how to use it, see [Using relay affiliation \(on page 372\)](#).

For more information and considerations about automatic relay assignment, see [Notes about automatic relay assignment \(on page 374\)](#).

Assigning relay at client installation time

By default, the BigFix clients are configured to connect to the main BigFix server at installation time.

If you want you can configure the BigFix client to assign a specific BigFix relay at the time of client installation. Depending on the client operating system, you must perform different steps as described in the following topics:

- [Windows Clients \(on page 366\)](#)
- [UNIX Clients \(on page 368\)](#)
- [Mac Clients \(on page 366\)](#)

Windows Clients

To set a relay, create a file named `clientsettings.cfg` in the BigFix Client installation folder (setup.exe) with one of the following contents:

- The file can contain one line like the following:

```
IP=http://relay.domain.com:52311/bfmirror/downloads/
```

which is automatically expanded out to define concurrently the following two settings on the Client:

```
__RelaySelect_Automatic=0
__RelayServer1=http://relay.domain.com:52311/bfmirror/downloads/
```

- You can directly define the two settings, optionally with other additional settings, such as a secondary relay, for example:

```
__RelaySelect_Automatic=0
__RelayServer1=http://relay.domain.com:52311/bfmirror/downloads/
__RelayServer2=http://relay2.domain.com:52311/bfmirror/downloads/
```

Mac Clients

You can optionally use the `clientsettings.cfg` file to create custom settings on a Mac Client, for example to assign the new Client to a specific parent relay.

The `clientsettings.cfg` file must be available in the same directory as the PKG file and the `actionsite.afxm` file.

To set a relay, create a file named `clientsettings.cfg` in the BigFix Client installation folder with one of the following contents:

- The file can contain one line like the following:

```
IP=http://relay.domain.com:52311/bfmirror/downloads/
```

which is automatically expanded out to define concurrently the following two settings on the Client:

```
__RelaySelect_Automatic=0
__RelayServer1=http://relay.domain.com:52311/bfmirror/downloads/
```

- You can directly define the two settings, optionally with other additional settings, such as a secondary relay, for example:

```
__RelaySelect_Automatic=0
__RelayServer1=http://relay.domain.com:52311/bfmirror/downloads/
__RelayServer2=http://relay2.domain.com:52311/bfmirror/downloads/
```

The agent installer is launched via the Terminal program as a privileged user by running the following command:

```
{sudo} /
Library/BESAgent/BESAgent.app/Contents/MacOS/BESAgentControlPanel.sh
```

The `sudo` command is not strictly needed but, authenticating as a Super User, you can perform the installation with no problems. This script has a few options that are listed if you run it without options.



Note:

- The QnA executable is also included in the client installation package. On Macintosh clients, to use it you must launch the Terminal program and run:

```
{sudo} /Library/BESAgent/BESAgent.app/Contents/MacOS/QnA
```

The `sudo` command is optional but some inspectors run only if you are Super User (root).



- The agent uninstaller is available in the .pkg install. It is located in: `/Library/BESAgent/BESAgent.app/Contents/MacOS/BESAgentUninstaller.sh`
- The agent .dmg package is no longer available.
- If you want to use the [Client Compliance API](#) on the Mac OSX system, you must request the client compliance library to the HCL Support team.

UNIX Clients

To assign a relay to your UNIX client at installation time, perform the following steps:

1. Create the `bescclient.config` file under `/var/opt/BESClient/` with the following lines:

```
[Software\BigFix\EnterpriseClient]
EnterpriseClientFolder = /opt/BESClient

[Software\BigFix\EnterpriseClient\GlobalOptions]
StoragePath = /var/opt/BESClient
LibPath = /opt/BESClient/BESLib

[Software\BigFix\EnterpriseClient\Settings\Client\__RelayServer1]
effective date = [Enter current date and time in standard format]
value = http://relay.domain.com:52311/bfmirror/downloads/

[Software\BigFix\EnterpriseClient\Settings\Client\__RelayServer2]
effective date = [Enter current date time in standard format]
value = http://relay2.domain.com:52311/bfmirror/downloads/

[Software\BigFix\EnterpriseClient\Settings\Client\__RelaySelect_Automatic]
effective date = [Enter current date time in standard format]
value = 0
```

2. Ensure that the directory and file are owned by root and are not writable by anyone else. In this way, when you run the UNIX client installer to install the client, the installer does not re-create or overwrite `/var/opt/BESClient/besclient.config` with the following settings:

```
[Software\BigFix\EnterpriseClient]
EnterpriseClientFolder = /opt/BESClient

[Software\BigFix\EnterpriseClient\GlobalOptions]
StoragePath = /var/opt/BESClient
LibPath = /opt/BESClient/BESLib
```

3. In `effective date = [Enter current date and time in standard format]` set the date and time. An example of the standard format of the date and time is the following:

```
Wed, 06 Jun 2012 11:00:00 -0700
```

You cannot specify `effective date = {now}` because the `{}` brackets imply the use of inline relevance, and **now** is a keyword.

4. In `value = http://relay.domain.com:52311/bfmirror/downloads/` modify `relay.domain.com` to be your desired relay.



Tip: You can obtain and verify the current content of the `besclient.config` by assigning a relay manually for a particular Linux client, and then copying the particular lines from its `besclient.config` file to use on other systems.

Adding More Settings

To add other client settings during the installation of the new client, include a line for each client setting to be set during client installation, for example, the file might look similar to:

```
__RelayServer1=http://relay.domain.com:52311/bfmirror/downloads/
__BESClient_Inspector_ActiveDirectory_Refresh_Seconds=43200
```

```
_BESClient_Log_Days=10
...
```



Note: On UNIX clients, the `besclient.config` file must contain the following sections before any other client settings:

```
[Software\BigFix\EnterpriseClient]
EnterpriseClientFolder = /opt/BESClient
```

```
[Software\BigFix\EnterpriseClient\GlobalOptions]
StoragePath = /var/opt/BESClient
LibPath = /opt/BESClient/BESLib
```

For more information about the client settings you can set, see [Deploy the agent so that it starts with specific settings](#).

Manually assigning relays to existing clients

You might want to manually specify exactly which clients must connect to which relay.

You can do this by performing the following steps:

1. Start the Console and select the **BigFix Management** Domain. From the Computer Management folder, click **Computers** to see a list of clients in the list panel.
2. Select the set of computers you want to attach to a particular Relay.
3. Right-click this highlighted set and choose **Edit Computer Settings** from the pop-up menu. As with creating the relays (above), the dialog boxes are slightly different if you selected one or multiple computers.
4. Check the box labeled **Primary Relay** and then select a computer name from the drop-down list of available Relay servers.
5. Similarly, you can assign a **Secondary Relay**, which will be the backup whenever the Primary Relay Server is unavailable for any reason.
6. Click **OK**.

Automatically assigning relays at client installation time

As you install clients, you might want them to automatically discover the closest relay by default.

Set this up by completing the following steps:

1. Open the **Edit Computer Settings** dialog by right-clicking any computer in the computers list on the BigFix console.
2. Click the button labeled **More Options**.
3. In the **Settings** tab check the following settings:
 - Relay Selection Method
 - Automatically Locate Best Relay
4. Select the **Target** tab.
5. Click the button labeled **All computers with the property**.
6. In the window below, select **All Computers**.
7. Select the **Constraints** tab.
8. Clear the **Expires On** box.
9. Click **OK**.

As new clients are installed, they now automatically find and connect to the closest relay without any further action.

Automatically assigning relays to existing clients

You can configure clients to automatically find the closest relay and point to that computer instead of the server.

This is the recommended technique, because it dynamically balances your system with minimal administrative overhead. Clients can determine which relays are the fewest number of hops away, so your topology is optimized.

This behavior is key when your network configuration is constantly shifting as laptops dock and undock, as computers start up or shut down, or as new hardware is added or removed. Clients can dynamically assess the configuration to maintain the most efficient connections as your network changes.

To make sure that your clients are set up to automatically discover relays run the following steps:

1. Start up the Console and select the **BigFix Management** Domain. From the Computer Management folder, click the **Computers** node to see a list of Clients in the list panel.
2. Shift- and ctrl-click to select the set of computers you want to automatically detect relays. Press **Ctrl-A** to select the entire set of clients.
3. Right-click this highlighted set and choose **Edit Computer Settings** from the pop-up menu. Depending on whether you selected one or more computers, the dialog boxes are slightly different. Typically, you select all the Clients in your network, so you will see the multiple-select dialog.
4. Check **Relay Selection Method**.
5. Click **Automatically Locate Best Relay**.
6. Click **OK**.

Using relay affiliation

Relay affiliation provides a more sophisticated control system for automatic relay selection.

The feature is very flexible and can be used in many different ways, but the primary use case is to allow the BigFix infrastructure to be segmented into separate logical groups. A set of clients and relays can be put into the same affiliation group such that the clients only attempt to select the relays in their affiliation group. This feature is built on top of automatic relay selection and you should understand that process (see the previous section) before implementing relay affiliation.

Relay affiliation applies only to the automatic relay selection process. The manual relay selection process (see next section) is unaffected even if computers are put into relay affiliation groups.

Choosing relay affiliation group names

There are no predefined relay affiliation group names; you can choose any group names that are logical to your deployment of BigFix.

Observe the following naming rules:

- Do not use special characters (including ".") when choosing names
- Group names are not case-sensitive
- Leading and trailing white spaces are ignored in comparisons

The ordering of relay affiliation groups is important for the client. The asterisk (*) has a special meaning in a relay affiliation list; it represents the set of unaffiliated computers. Unaffiliated computers are clients or relays that do not have any relay affiliation group assignments or have the asterisk group listing.



Note: The labels, defined in the client setting

`_BESRelay_Register_Affiliation_AdvertisementList` and delimited by semi-colon (;), must not be bigger than 64 characters.

For more information, see [Relay affiliation](#).

Assigning clients to relay affiliation groups

Clients are assigned to one or more relay affiliation groups through the client setting:

```
_BESClient_Register_Affiliation_SeekList
```

Set the client setting to a semi-colon (;) delimited list of relay affiliation groups, for example:

```
AsiaPacific;Americas;DMZ
```

Associating relays and server to affiliation groups

Relays and servers can be assigned to one or more affiliation groups through the client setting:

```
_BESRelay_Register_Affiliation_AdvertisementList
```

Set also client setting to a semi-colon (;) delimited list of relay affiliation groups, for example:

```
AsiaPacific;DMZ;*
```



Note: Relays and servers are not required to have a SeekList setting. The SeekList is used only by the client.

Notes about automatic relay assignment

The BigFix clients use a sophisticated algorithm to calculate which relay is the closest on the network. The algorithm uses small ICMP packets with varying TTLs to discover and assign the most optimal relay.

If multiple optimal relays are found, the algorithm automatically balances the load. If a relay goes down, the clients perform an auto-failover. This represents a major improvement over manually specifying and optimizing relays. However, there are a few important notes about automatic relay selection:

- ICMP must be open between the client and the relay. If the client cannot send ICMP messages to the relays, it is unable to find the optimal relay (in this case it uses the failover relay if specified or picks a random relay).
- Sometimes fewer network hops are not a good indication of higher bandwidth. In these cases, relay auto-selection might not work correctly. For example, a datacenter might have a relay on the same high-speed LAN as the clients, but a relay in a remote office with a slow WAN link is fewer hops away. In a case like this, manually assign the clients to the appropriate optimal relays.
- Relays use the DNS name that the operating system reports. This name must be resolvable by all clients otherwise they will not find the relay. This DNS name can be overridden with an IP address or different name using a task in the Support site.
- Clients can report the distance to their corresponding relays. This information is valuable and should be monitored for changes. Computers that abruptly go from one hop to five, for example, might indicate a problem with their relays.

Adjusting the BigFix Server and Relays

To get the best performance from BigFix, you might need to adjust the server and the relays.

There are two important ways of adjusting the flow of data throughout your network, throttling and caching:

Throttling Outgoing Download Traffic

Throttling allows you to set the maximum data rate for the BigFix Server. Here is how to change the data rate:

1. Open **Fixlets and Tasks** icon in the Domain Panel navigation tree and then click **Tasks Only**.
2. In the find window above the Tasks List, type "throttle" to search for the appropriate Task.
3. From the resulting list, click the task labeled **Server Setting: Throttle Outgoing Download Traffic**. A task window opens below. Make sure the **Description** tab is selected. There are three choices:
 - **Set the limit on total outgoing download traffic.** This choice allows you to directly set the maximum number of kilobytes per second you want to grant to the server.
 - **Disable the setting.** This option lets you open the download traffic on the BigFix Server to full throttle.
 - **Get more information.** This option opens a browser window with more detailed information about bandwidth throttling.
4. If you select a throttle limit, then from the subsequent **Take Action** dialog you can select a set of computers to throttle. Click **OK** to propagate the task.

Download Cache Size

BigFix Servers and Relays maintain a cache of the downloads most recently requested by Clients, helping to minimize bandwidth requirements.

1. Open **Fixlets and Tasks** icon in the Domain Panel navigation tree and then click **Tasks Only**.
2. In the find window above the Tasks List, type "cache" to search for the appropriate Task.

3. From the resulting list, click the task labeled **Relay / Server Setting: Download Cache Size**. A task window opens below. Make sure the **Description** tab is selected. Select the link to change the download cache size on the listed computers. This list might include Relays as well as the BigFix Server.
4. Enter the number of megabytes to cache. The default is 1024 MB, or one gigabyte.
5. From the subsequent **Take Action** dialog, select a set of computers and click **OK**.

Assigning a relay when the server is unreachable

After you install the client, it connects to and registers with the main BigFix server.

After the client registers with the main server, a master operator can assign the client to a primary relay as well as configure it to fail over to a secondary relay if the primary relay becomes unavailable.

In some cases, when the client is installed, it might be unable to reach the main server directly across the local area network or Internet. For example, if the client workstation is in a remote office and cannot make a connection through the enterprise firewall to reach the main server. In this case you must set up a DMZ relay that has been given access through a hole in the firewall. For more information, see [Setting Internet Relays \(on page 376\)](#).

You must also deploy the remote office client installer with a configuration file to set the client primary relay during installation. Specify the primary relay in the configuration file to register the client with a relay that it can connect to (such as the DMZ relay). For more information see [Assigning Relay at Client Installation Time \(on page 365\)](#).


Setting up internet relays

You can configure your relays to manage clients that are only connected to the Internet without using VPN as if they were within the corporate network.

Using this approach, you can manage computers that are outside the corporate network (at home, in airports, at coffee shops, and so on.) using BigFix to:

- Report their updated properties and Fixlet status.
- Enforce new security policies defined by a Console operator.
- Accept new patch or application deployments.

This configuration is especially useful for managing mobile devices that might often be disconnected from the corporate network. The following picture shows a typical Internet-based relay, as it might exist in a DMZ network:

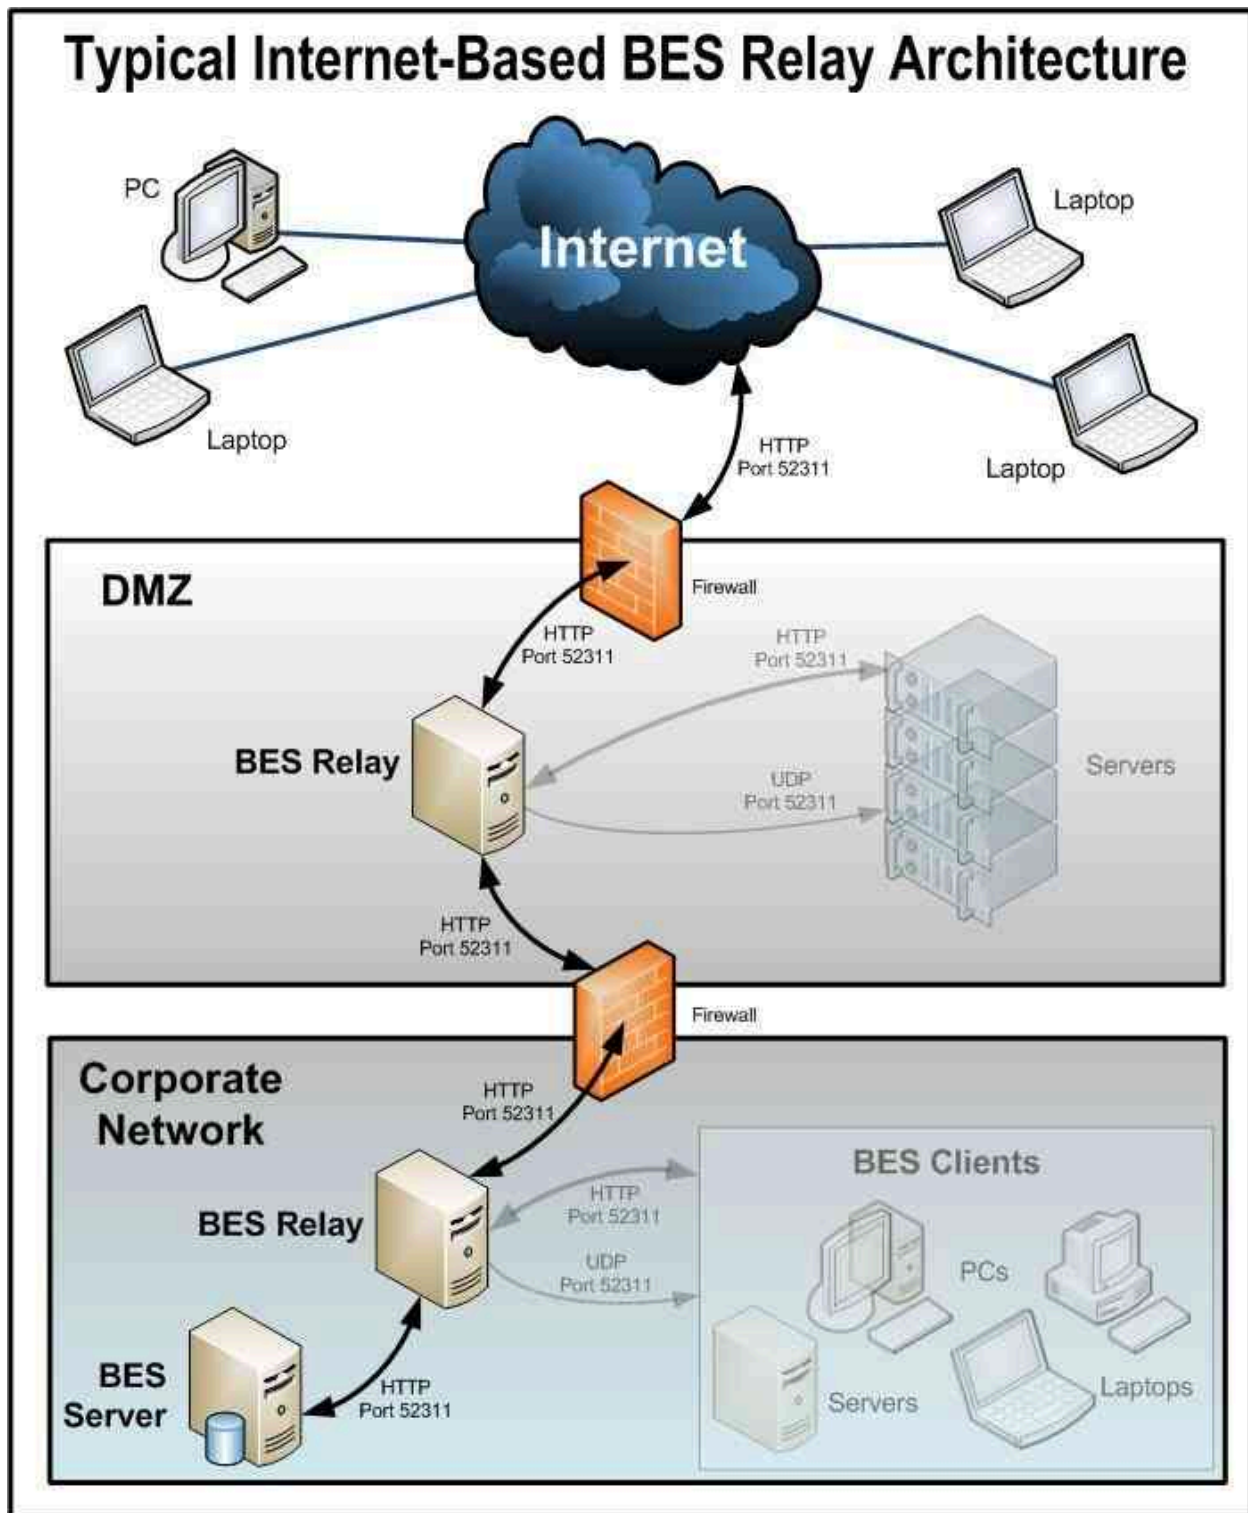

Setting up an Internet-facing relay enables external clients to find and connect to a relay. In our picture the clients can select the following types of relay:

- **Manual Relay Selection:** Clients can be configured using the console to manually select the Internet-facing relay DNS-alias (or IP address) as their primary, secondary, or failover relay. For more details about the failover relay setting, see Registration.
- **Automatic Relay Selection:** If ICMP traffic has been allowed from the Internet to a DMZ-based Internet relay, then automatic relay selection can be leveraged to allow clients to find the closest relay as they move from location to location (either within a corporate network or on the Internet). For external clients on the Internet, the only relay they are able to find and connect to is the Internet-facing relay (because ICMP traffic from the Internet would be blocked to the relays within the corporate network).



Note: You can use the feature relay Affiliation to configure clients to find the most appropriate relay. For more details, see [Relay affiliation](#) and <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Relay%20Affiliation>.

This is how the relays, clients, and firewalls are configured in a typical internet-based BigFix relay architecture:

1. A relay is deployed in a DMZ and the internal DMZ firewall allows only BigFix traffic (HTTP Port 52311) between the DMZ relay and a designated relay within the corporate network. The design above suggests bidirectional traffic as opposed to only allowing the Internet-facing relay to initiate network connections to the relay within the internal corporate network. This enables quicker client response times because immediate notifications of new content are made to the Internet-facing relay thus maintaining a real-time synchronization of content. If the bidirectional communication between the Internet-facing BigFix relay and the relay in the corporate network is not allowed, the Internet-facing relay must be configured to periodically poll its parent (the relay within the corporate network) for new content. For more details about configuring command polling, see Command polling .
2. BigFix deployments that include internet-facing relays that are not configured as “*authenticating*” are prone to security threats. Security threats in this context might mean unauthorized access to the relays and any content or actions, and

download packages associated with them or to the **Relay Diagnostics** page that might contain sensitive information (for example: software, vulnerability information, and passwords). When a relay is configured as authenticating, only the BigFix clients in your environment can connect to it and all the communication between them happens through TLS (HTTPS). This configuration also prevents any unauthorized access to the Relay and Server diagnostics page.

For instructions on how to set the internet-facing relays as authenticating, see [Authenticating relays](#).

3. After relay communication is established between the DMZ and the internal corporate network, the external firewall also has to be opened to allow Internet-based client traffic (HTTP port 52311) to reach the DMZ relay. In addition, allowing ICMP traffic through the external firewall to the Internet-facing relay can aid in the external client auto-relay selection process.
4. A DNS-alias (or IP address) is assigned to the relay that enables external clients to find the DMZ-based Internet relay. The DNS-alias must be resolvable to a specific IP address.
5. To make the relay aware of the DNS-alias (or IP address) deploy the [BES Relay Setting: Name Override](#) Fixlet to the DMZ-based Internet relay.
6. Disable the relay diagnostics for Internet relays (by configuring `_BESRelay_Diagnostics_Enable`) or password-protect the page (by configuring `_BESRelay_Diagnostics_Password`). For details about the configuration settings, see [Relay diagnostics](#).

For more information about relay diagnostics, see [Relay and Server diagnostics](#).

7. With the entire BigFix communication path established from the Internet through the DMZ-based Internet relay and ultimately to the main server, the next step depends on the various relay selection methods available in a given BigFix infrastructure.
8. Dynamic Policy Settings can be applied to Internet-based clients to allow for configurations better suited to external agents. For example, because the normal notification method (a UDP ping on port 52311) for new content might not reach external clients, dynamic settings can be used to have clients check for new content

more frequently than the default period of 24 hours. For more information on setting up command-polling, see [Changing the gather interval for a BigFix Client via the command polling client settings](#).

Related reference

List of settings and detailed descriptions

Related information

Relay diagnostics

Authentication

BigFix Configuration Settings

Viewing which relay is assigned to a client

To see which clients are selecting which relays run the following steps:

1. Start up the console and select the **BigFix Management** Domain.
2. From the **Computer Management** folder, click **Computers** to see a list of clients.
3. Look in the **Relay** column in the List Panel (this column might be hidden; in which case you might need to right-click the column headings and make sure **Relay** is checked). The BigFix Relay columns show information including the Relay method, service, and computer.

By default, the clients attempt to find the closest relay (based on the fewest number of network hops) every six hours.

Viewing the relay chain on the client

Starting from Patch 13, the capability to view the relay chain on a specific BigFix client was added to the product.

To use this capability, both the client and the relay/server must be at Patch 13 level. The purpose of this capability is to allow the client to trace his relay chain for each registration.

The relay chain information is stored within a new client folder named **RelayChain** located under the **BESClient/_BESData/_Global** client directory.

The Relay chain information is saved each day into a text file and each file follows the naming convention "yyyymmdd.txt"

Where:

yyyymmdd

Represents the year, month and day on which the relay chain information was saved.

A Sample TXT file is displayed below:

```
At 05:05:13 +0100 - S - s:11668927(server_hostname) -
  r:6843826(relay1_hostname)
- r:1083414982(relay2_hostname) - c:12183892(client_hostname)
At 11:05:10 +0100 - S - s:11668927(server_hostname) -
  r:6843826(relay1_hostname)
- r:1083414982(relay2_hostname) - c:12183892(client_hostname)
At 12:13:34 +0100 - S - s:11668927(server_hostname) -
  r:1083414982(relay2_hostname)
- c:12183892(client_hostname)
```



Note:

- If the computer ID is related to the server, it will be preceded by *s*:
- If the computer ID is related to the relay, it will be preceded by *r*:
- If the computer ID is related to the client, it will be preceded by *c*:

Each Relay chain information follows the same pattern:

```
computerID(computer_hostname)
```

Each Relay chain TXT file follows the same pattern:

```
At [hh:mm:ss] [local_zone] - [registration_response] -
  [computerID_1(hostname)]
-[computerID_2(hostname)] - ... - [computerID_3(hostname)]
```

Where:

hh:mm:ss

The time on which the registration occurred.

local_zone

The related time zone.

registration_response

The status of the registration. It can have two values: **S** for a successful registration. **F** for a failed registration.

computerID_1(hostname)

(Successful registration) It is the BigFix server.

computerID_2(hostname)

(Successful registration) It is the top-level relay that connects directly to the BigFix server.

...

(Successful registration) The child relays follow, if present in your environment.

computerID_3(hostname)

(Successful registration) It is the client that connects to the relay, or child relay if present in your environment.

The maximum amount of TXT files saved within the new client folder named **RelayChain** can be specified by using a new configuration setting named `_BESClient_Relay_Chain_Days`.

For more details about the setting, see Relay Management.

Failed Registration Scenario 1

In the following example, if the relay chain is not available, the string N/A is displayed instead of the computer ID. This error occurs, for example, when the client is at Patch 13 level and the relay/server is at an older level.

A Sample TXT file is displayed below:

```
At 23:36:01 +0100 - F - N/A
```

Failed Registration Scenario 2

In the following example, the error GetURL Failed refers to a failed registration caused by a communication issue between two components inside the relay chain.

A Sample TXT file is displayed below:

```
At 08:04:55 +0100 - F - GetURL Failed
```

Failed Registration Scenario 3

In the following example, the registration failed at Relay with ID 6843826.

A Sample TXT file showing the relay chain is displayed below:

```
At 16:25:44 +0100 - F - r:6843826(relay1_hostname)
- r:1083414982(relay2_hostname) - c:12183892(client_hostname)
```

Viewing the relay chain on the BigFix server

After running the Fixlets named "TROUBLESHOOTING: Run BES Client Diagnostics" on Windows and "TROUBLESHOOTING: Run BES Client Diagnostics (Linux/UNIX/Mac)" on Linux and macOS, the BESClient data is uploaded to the BigFix server in the Upload Manager directory. Among other data, also the relay chain information of the client gets uploaded.

You can view the client relay chain information in the following BigFix server directory:

Windows

BigFix_Server_installation_path\UploadManagerData

Where the server installation path is by default **C:\Program Files
(x86)\BigFix Enterprise\BES Server**

Linux

BigFix_Server_installation_path/UploadManagerData

Where the server installation path is by default **/var/opt/BESServer**

Chapter 14. Introduction to Tiny Core Linux - BigFix Virtual Relay

Follow the step-by-step sequence of operations needed to build the virtual machine, from the downloading of the ISO image to the complete setup and configuration of the BigFix Virtual Relay.

You can use Tiny Core Linux - BigFix Virtual Relay to deploy new relays throughout your virtual enterprise in a cost-effective way.

Deploy a Virtual Relay, based on the Tiny Core Linux platform, to achieve the following benefits:

- Low number of security exposures, because a minimal set of services is installed and required.
- Low number of resources, because a reduced amount of RAM/CPU/HD is required.
- Low maintenance and deployment efforts are needed.
- Possibility to deploy either a single virtual relay instance by using the manual deployment or to deploy a big number of instances by using the auto-deployment feature.

Architectural overview

Tiny Core Linux (TCL) runs from a RAM copy created at boot time.

Besides being fast, Tiny Core Linux protects system files from changes and ensures a pristine system on every reboot. Tiny Core Linux is easy, fast, simple to be renewed, and stable.

The TCL solution is a mini Linux distribution, which provides the following advantages:

- A minimal set of services installed by default.
- The capability to easily and quickly customize the base core system with new extensions.

To have a BigFix Virtual Relay up and running, the following additional libraries are required:

- acl.tcz
- attr.tcz
- syslinux.tcz
- nspr.tcz
- nss.tcz
- poprt.tcz
- tzdata.tcz
- sqlite3.tcz

**Note:**

You can download the libraries listed in the table from the following website:

<http://distro.ibiblio.org/tinycorelinux/>

In the Downloads section.

The BigFix Virtual Relay uses a RAM disk for the core operating system files. The Linux Kernel `core.gz` loads the virtual machine at boot time, which gets extracted directly into the RAM disk. The `core.gz` is distributed as part of the Tiny Core Linux product and contains the root file system and system support applications.

The BigFix client and relay are supplied as Tiny Core extensions.

You can deploy the BigFix Virtual Relay by:

1. Creating a virtual machine and installing Tiny Core Linux on it, as described in [Phase 1 - Configuring the Tiny Core Linux virtual machine \(on page 388\)](#).
2. Creating a virtual machine template that is needed to deploy the BigFix Virtual Relay, as described in [Phase 2 - Preparing the BigFix Virtual Relay template \(on page 396\)](#).
3. Using the template, deploying the BigFix Virtual Relay instance, as described in [Phase 3 - Configuring the BigFix Virtual Relay instance \(on page 406\)](#).

The deployment can be separated into phases.

Phase 1 - Configuring the Tiny Core Linux virtual machine

In Phase 1, you set up a virtual machine with the Tiny Core Linux operating system that can instantiate the BigFix relay.

The setup process comprises three steps:

1. Download the ISO image.
2. Create a virtual machine.
3. Install Tiny Core Linux on the virtual machine.

Downloading the ISO image

The ISO image is available at <http://tinycorelinux.net>.

In the [Downloads](#) section, select a version supported by BigFix, and download the related CorePlus .iso file.

For an updated list of TinyCore versions supported by BigFix, refer to the [BigFix Enterprise Suite Download Center Platform Release Information](#) page.

Creating a virtual machine

Starting from your ESXi hypervisor, create a new virtual machine by completing the following steps.

1. Create a new **Custom** virtual machine.
2. Provide the virtual infrastructure specific information depending on your environment, such as:
 - Name and location (for example: Specify "Template BigFix VR")
 - Host and cluster
 - Resource pool
 - Data store
 - Virtual machine version. Choose the latest version.
3. Provide the virtual machine settings. Set the guest operating system by selecting **Linux** and specify the **Other 2.6.x Linux (32-bit)** as minimum version. This choice

allows you to use the VMware Tools. The last tested configuration is Tiny Core 12.0 with "Other 4.x Linux (32-bit)".

4. Specify the virtual machine resources:

- For details about the BigFix Relay resources configuration, refer to the Capacity Planning Guide at [BigFix Performance & Capacity Planning Resources](#).
- According to your available networks, select the name of your network and select **VMXNET3** as its adapter. This choice allows you to use the network driver provided by VMware Tools.
- Set the disk size according to your needs and choose **IDE 0** as "Virtual Device Node". IDE is the only supported Virtual Device Node.

5. From the summary panel, review the configuration displayed, enable the editing of the virtual machine settings, and click **Continue**.


6. Edit the virtual machine settings to mount the CorePlus ISO image previously downloaded:

- a. Browse the data store for the ISO file that you downloaded from <http://tinycorelinux.net>
- b. Enable the DVD-ROM to be connected to the virtual machine at startup time.
- c. Click **Finish**.

Installing Tiny Core Linux on the virtual machine

Start the virtual machine that you created and follow these steps:

Choose the installation option shown in the following screen capture:

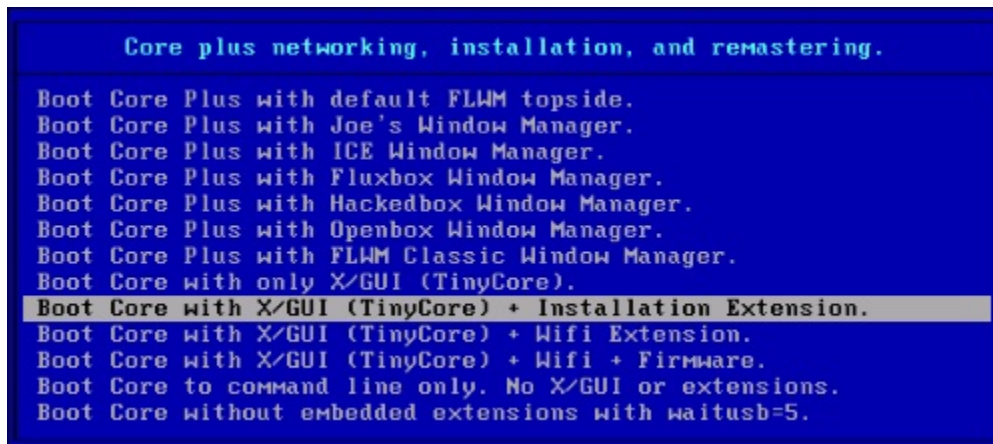


Run the Tiny Core installer by clicking TC_Install:



Start the Tiny Core installation and follow these panels to install it on an empty hard drive:

Leave the pre-filled path as core.gz (default path).


Select the check box **Whole Disk** and select **sda** as the core disk.

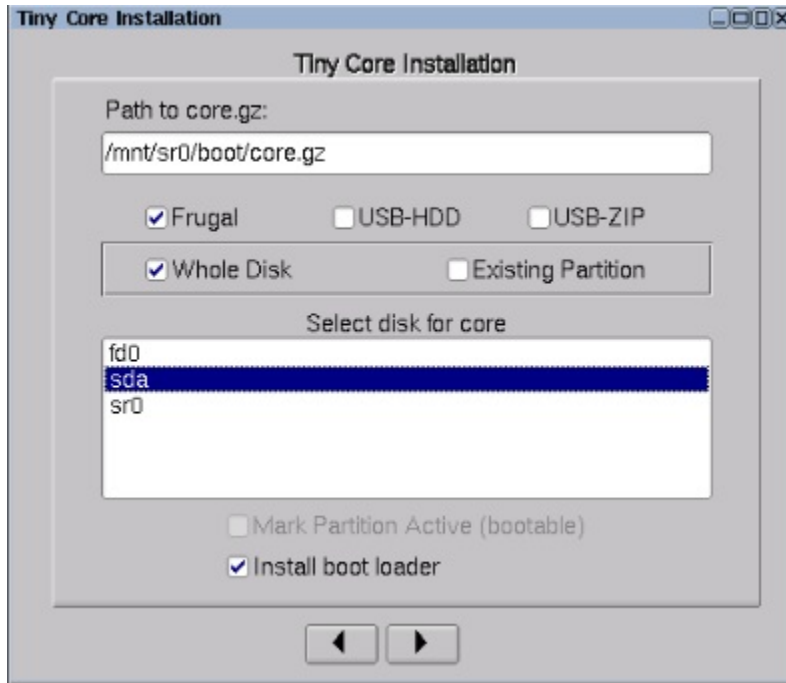


Note: Frugal is the typical installation method for Tiny Core Linux. You basically have the system in two files, `vmlinuz` and `core.gz`, whose location is specified by the boot loader.

Any user files and extensions are stored outside the base operating system.

Format the new partition. It is recommended that you select the **ext4** option to support the Linux permissions.

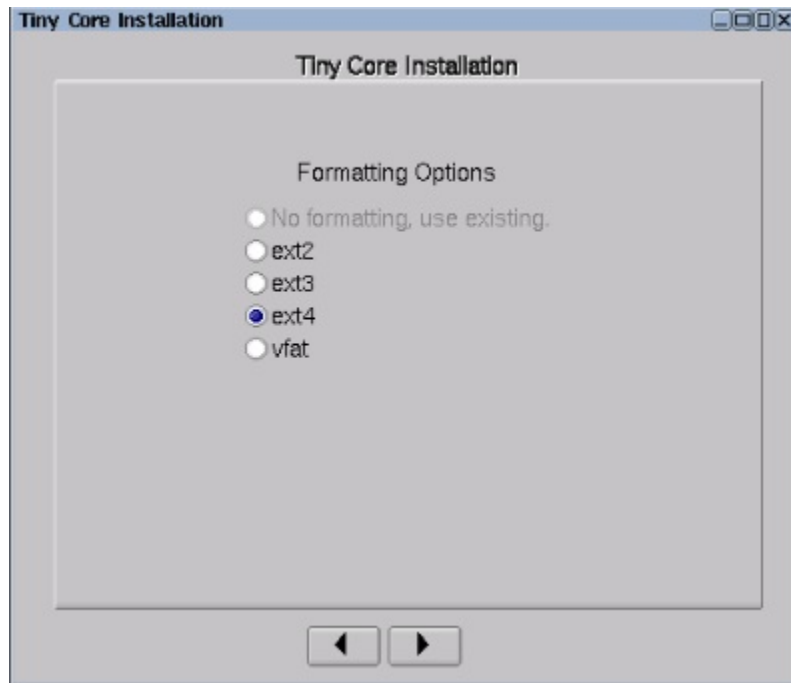

If you want to use additional boot codes, such as screen resolution or keyboard mapping, enter them now.

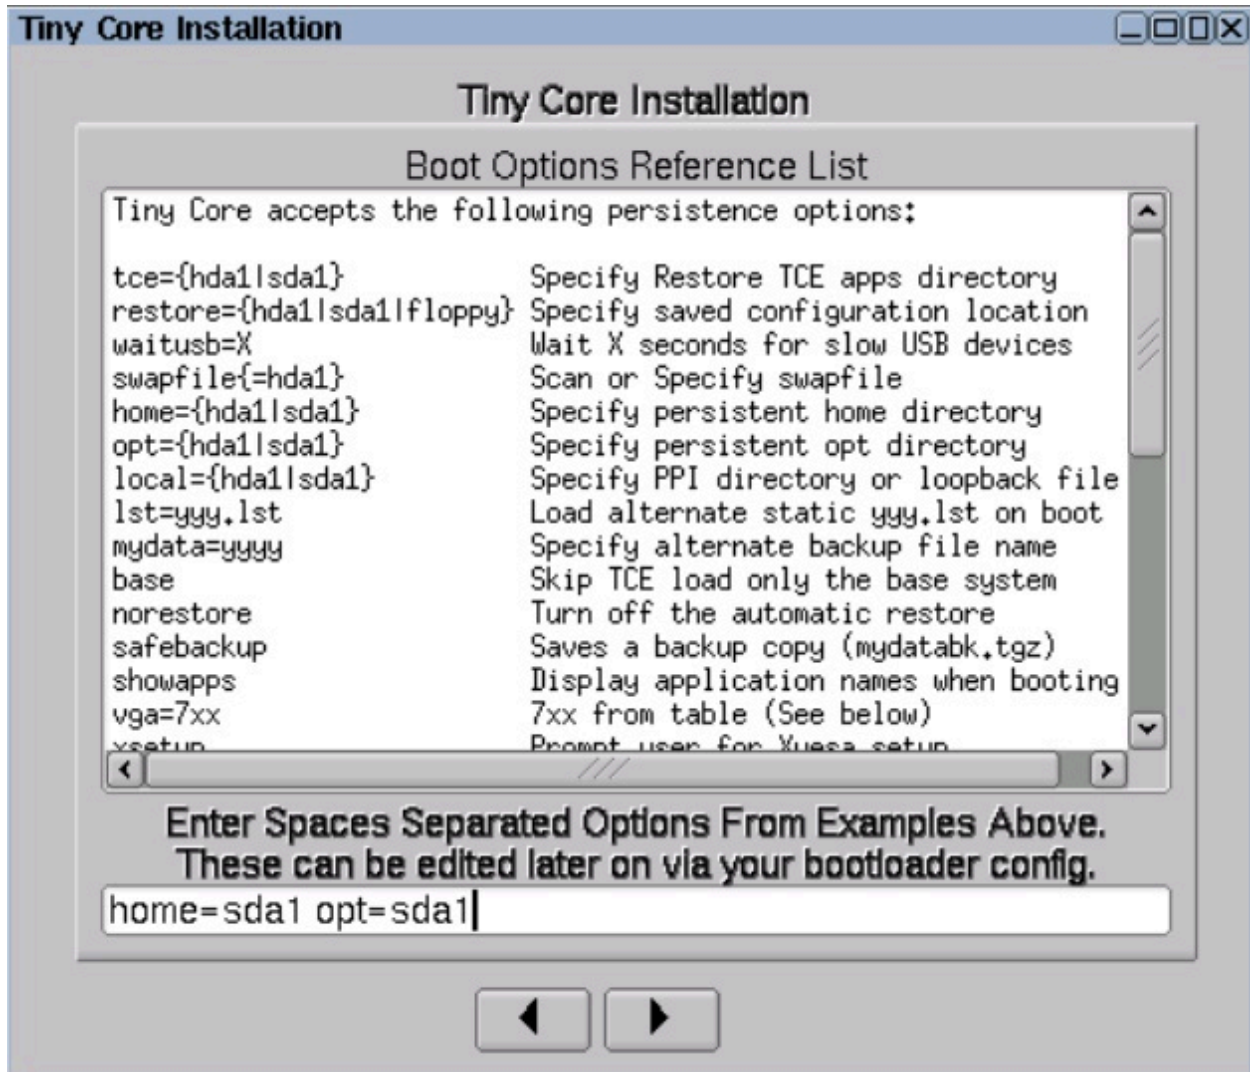


Set the location of the persistent **home** directory **home=sda1**.


Set the location of the persistent **opt** directory **opt=sda1**.



Note: These two directories become persistent when managing these two file systems.

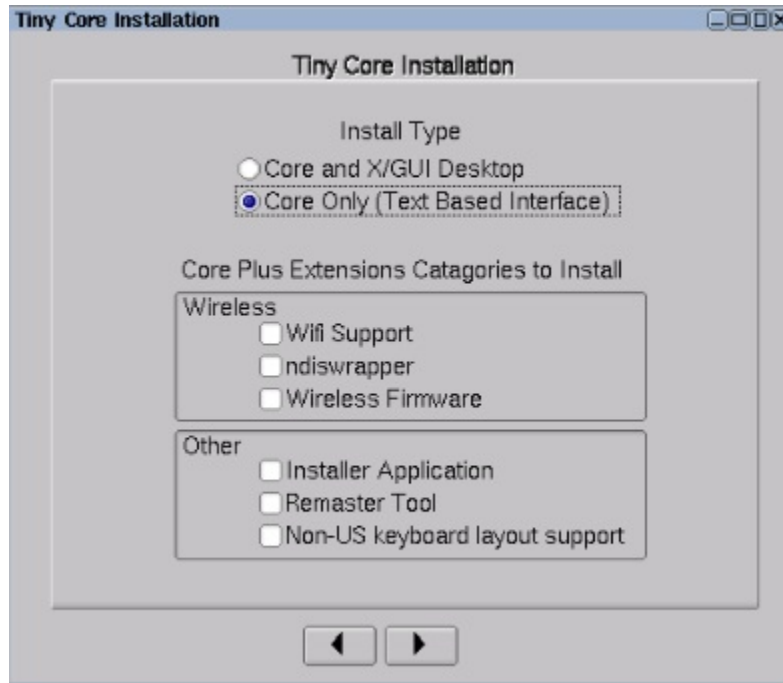


Select the **Core Only (Text Based Interface)** option to have a virtual machine with only the CLI.

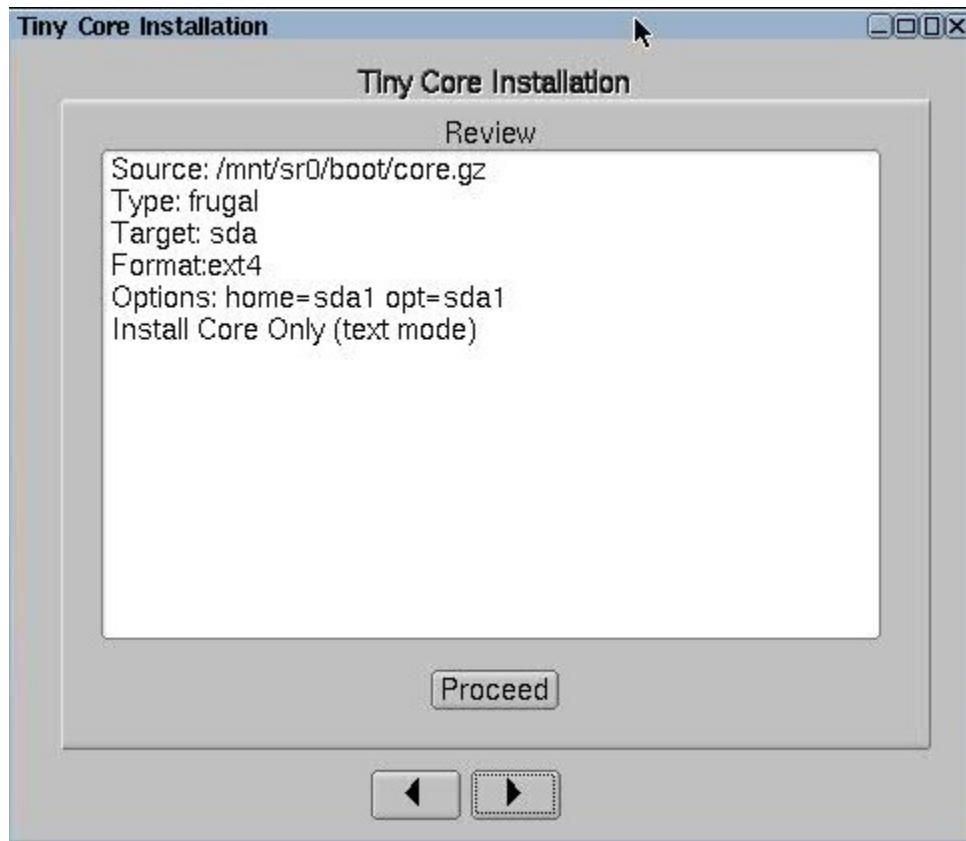

If everything is OK, click **Proceed**.


The time required varies depending on the size of your hard drive.

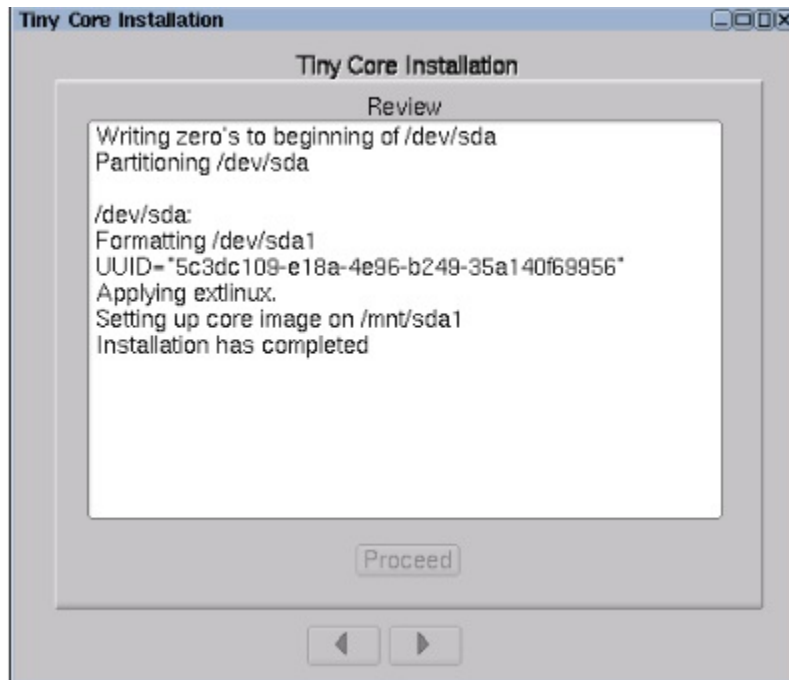

Tiny Core Linux is now installed.

Restart the machine by clicking Exit, selecting **Reboot**, and clicking **OK**.

By choosing to reboot, you ensure the data persistence. Do not use Shutdown at this stage.

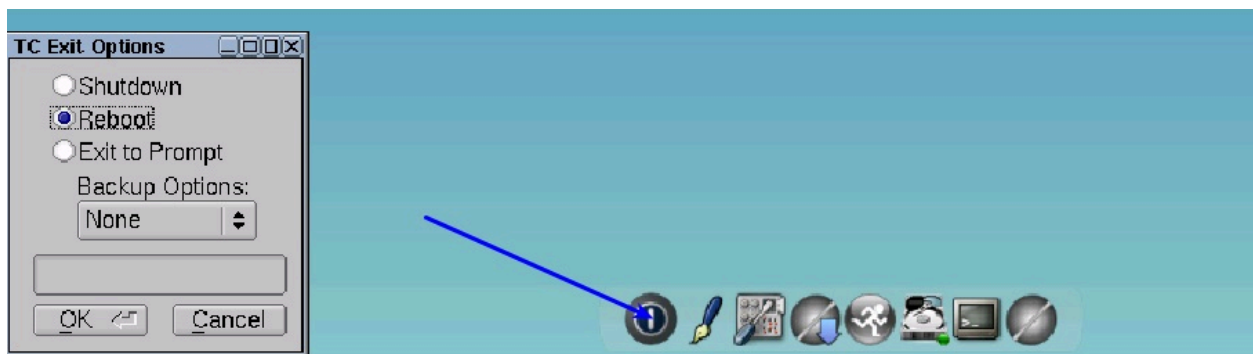

Phase 2 - Preparing the BigFix Virtual Relay template

After installing Tiny Core Linux on the virtual machine, shut down the virtual machine and edit the properties to connect the BESRelay-x.x.x.xx-tcl.i686.iso file.

1. Browse the path where you downloaded and saved the ISO image.
2. Select the `BESRelay-x.x.x.xx-tcl.i686.iso` file.
3. Click **OK**.

Start the virtual machine.

After starting the virtual machine, launch the setup to configure the template from the command line:

1. Mount the BigFix ISO image by running: `mount /mnt/sr0/`
2. Untar the tar file provided in the ISO image by running: `tar -xvf /mnt/sr0/bessetup.tar`
3. Launch the setup by running the `./setup` command.

```
tc@box:~$ mount /mnt/sr0
tc@box:~$ tar -xvf /mnt/sr0/bessetup.tar
./
./besSetup.tcz
./setup
tc@box:~$ ./setup _
```

The Virtual Machine Template Configuration Tool displays.

Specify if you are using the network or a local folder for the complete template setup:

```
IBM BigFix Relay - Virtual Machine Template Configuration Tool

This tool enables you to configure the BigFix Relay virtual machine template
Specify if you use a network configuration or a local folder to locate the required prerequisites
Use Network: [y:n] y
```



Note: The entire setup is performed either using the network or a local folder. Both are used to customize the virtual relay template.

If you specified "n" (no), see [Template setup and customization from a local folder \(on page 398\)](#).

If you specified "y" (yes), see [Template setup and customization from the network \(on page 401\)](#).

Template setup and customization from a local folder

To use this option, you must have previously downloaded all the required files needed for the:

- Operating system prerequisites (mandatory to install and run the Virtual Relay).
- Masthead configuration (optional).
- VMware Tools configuration (optional).

For details about the operating system prerequisites, see [Architectural overview \(on page 386\)](#).

For the masthead configuration, ensure that you retrieve, from the BigFix server (or relay), the `actionsite.afxm` file.

For details about the VMware Tools prerequisites, see [VMware and Open VM tools \(on page 414\)](#).

```

IBM BigFix Relay - Virtual Machine Template Configuration Tool

This tool enables you to configure the BigFix Relay virtual machine template
Specify if you use a network configuration or a local folder to locate the required prerequisites
Use Network: [y:n] n
Local Folder: [] /mnt/sr0
Do you want to configure the masthead now? [y:n] y
Do you want to configure the VMWare tools now? [y:n] y

The Masthead file was found
The Virtual Relay prerequisites were found
The VMWare tools prerequisites were found
Do you want to enable the Virtual Relay Instance Auto-Deployment mode? [y:n] _

```



Note: Depending on which selections you made in the configuration tool, if some required prerequisites cannot be located in the local folder specified, the configuration tool displays warnings or error messages stating which prerequisites are missing and which configurations cannot be performed.

In the previous panel, you must:

- Specify if you want to install the masthead file.
- Specify if you want to install the VMware Tools.

If you specified "y" (yes) to both the previous selections, the following choice is displayed:

```

Do you want to enable the Virtual Relay Instance Auto-Deployment mode? [y:n] _

```

Choose if you want to enable the automated deployment.



Note: Only if you choose to not enable the automated deployment (Auto-Deployment mode), you have the possibility to decide if you want to configure the



manual deployment of the virtual relay instances in DHCP mode or using the static IP parameters. If you decide to enable the automated deployment, this choice is not displayed.

The virtual relay instances will be deployed according to the choice you make.

For more details about the two different types of deployment, automated or manual, see Phase 3.

If you specified "y" (yes) to the Auto-Deployment mode, enter the user password required by the tc user:

```
Enter the password required by the tc user
Changing password for tc
New password: _
```

If you specified "n" (no) to the Auto-Deployment mode, you must choose if you are using the DHCP mode or the static IP address for the deployment of the instances:

```
Do you want to configure the Instance manual deployment in DHCP mode? [y!n] _
```

If you specify "y" (yes) to the DHCP mode, the instances will be deployed requiring only the host name; the network settings will be automatically in DHCP mode.

If you specify "n" (no) to the DHCP mode, the instances will be deployed requiring the host name and the network parameters.

Enter the country code related to your time zone and, if your country has more than one time zone, enter the appropriate number for the time zone that you want to set.

```

Time zone setup

Enter the country code to set the time zone: [] it

Countries list:

 1 - Europe/Rome

Enter the number specific for your time zone: [] 1

The time zone was changed to Europe/Rome

Is the time zone correct? [y'n] _

```

The operating system automatically creates a swap area to optimize the template creation.

```

Operating System tuning

Creating the swap file
2097152+0 records in
2097152+0 records out
2147483648 bytes (2.0GB) copied, 46.670798 seconds, 43.9MB/s

The swap file was created successfully.

IBM BigFix Relay - The Virtual Machine Template was successfully installed.

```

When the operation is completed, the template is successfully installed and you can power off the virtual machine as follows:

```
tc@virtualrelay:~$ sudo poweroff _
```

Template setup and customization from the network

To use this option, you must have Internet access from the virtual machine on which you are configuring this template.

IBM BigFix Relay - Virtual Machine Template Configuration Tool

This tool enables you to configure the BigFix Relay virtual machine template

Specify if you use a network configuration or a local folder to locate the required prerequisites

Use Network: [y!n] y

Network Configuration

Configure the network settings used by the virtual machine template.

Specify if you require DHCP to create the template.

Use DHCP: [y!n] _

If you specified "n" (no) to the Use DHCP option, enter the static IP parameters of your network.

Enter the required parameters or press ENTER to confirm the values displayed.

Enter the IP Address: [] 10.1.57.10

Enter the Subnet Mask: [] 255.255.255.0

Enter the Broadcast Address: [10.1.57.255]

Enter the Gateway IP Address [] 10.1.57.254

Enter the Primary DNS Server IP Address: [] 10.1.57.1

(Optional) Enter the Secondary DNS Server IP Address: []

Use Proxy: [y!n] y

Enter the Proxy IP Address: [] 10.1.57.234

```

Enter the Proxy Port: [] 1234
Enter the Proxy User: []
Review the entered parameters and verify if they are correct.
    Use DHCP: n
    IP Address: 10.1.57.10
    Netmask: 255.255.255.0
    Broadcast: 10.1.57.255
    Gateway: 10.1.57.254
    Primary DNS: 10.1.57.1
    Secondary DNS:
    Use Proxy: y
    Proxy IP Address: 10.1.57.234
    Proxy Port: 1234
Is the configuration correct? [y;n]

```

Confirm that the network configuration is correct by entering "y" (yes).

Otherwise, enter "n" (no) to restart the parameter input.

If you specified "y" (yes) to the Use DHCP option, ensure that the DHCP server of your network is up and running.

```

Review the entered parameters and verify if they are correct.
    Use DHCP: y
Is the configuration correct? [y;n] _

```

To customize the instance template, complete the following selections:

- Specify if you want to install the masthead file.
- Specify if you want to install the VMware Tools.

```

Instances customization
Do you want to configure the masthead now? [y;n] y
Do you want to configure the VMware tools now? [y;n] y

```

If you specified "y" (yes) to both selections, the following choice is displayed:

```
Do you want to enable the Virtual Relay Instance Auto-Deployment mode? [y!n] _
```

Choose if you want to enable automated deployment.

The virtual relay instances will be deployed according to the choice you make.

For more details about the two different types of deployment, automated or manual, see Phase 3.

If you specified "y" (yes) to the Auto-Deployment mode, enter the user password required by the **tc** user:

```
Enter the password required by the tc user
Changing password for tc
New password: _
```

If you specified "n" (no) to the Auto-Deployment mode, you must choose if you are using the DHCP mode for the deployment of all future instances:

```
Do you want to configure the Instance manual deployment in DHCP mode? [y!n] _
```

If you specified "y" (yes) to the DHCP mode, the instances will be deployed requiring only the host name; the network settings will be automatically in DHCP mode.

If you specified "n" (no) to the DHCP mode, the instances will be deployed requiring the host name and the network parameters.

If during the template creation you specified "y" (yes) for the masthead setup, the following panel is displayed:

Masthead Installation

BigFix Server (or Relay) IP Address: [] 10.1.57.20

BigFix Server (or Relay) Deployment Port Number: [52311] _

Enter the BigFix server parameters, IP address and port number.



Note: Even if you specify the relay IP address, the Virtual Relay will connect directly to the server and not to the indicated relay.

Enter the country code related to your time zone and, if your country has more than one time zone, enter the appropriate number for the time zone that you want to set.

Time zone setup

Enter the country code to set the time zone: [] it

Countries list:

1 - Europe/Rome

Enter the number specific for your time zone: [] 1

The time zone was changed to Europe/Rome

Is the time zone correct? [y;n] _

The operating system automatically creates a swap area to optimize the template creation.

Operating System tuning

Creating the swap file

2097152+0 records in

2097152+0 records out

2147483648 bytes (2.0GB) copied, 46.670798 seconds, 43.9MB/s

The swap file was created successfully.

IBM BigFix Relay - The Virtual Machine Template was successfully installed.

When the operation is completed, the template is successfully installed and you can power off the virtual machine as follows:

```
tc@virtualrelay:~$ sudo poweroff_
```

Creating the BigFix Virtual Relay template

After the virtual machine was powered off, you can generate the virtual machine template by completing these steps from the Virtual Center.

1. Right-click the virtual machine that you created.
2. Select **Template > Convert to Template**.

Phase 3 - Configuring the BigFix Virtual Relay instance

Depending on the choice you made when creating the template (manual deployment or auto-deployment), the method of deploying future virtual relay instances changes.

From the template, deploy the virtual machine according to your specific virtual center architecture, in terms of data store and network availability.

In case of auto-deployment, see [Deploying a new BigFix Virtual Relay instance by using Auto-Deployment \(on page 406\)](#).

In case of manual deployment, see [Manually deploying a new BigFix Virtual Relay instance \(on page 408\)](#).

Deploying a new BigFix Virtual Relay instance by using Auto-Deployment

You can use this function to automatically deploy a consistent number of virtual relays based on the template created in Phase 2 by answering "y" (yes) to the option "Do you want to enable the Virtual Relay Instance Auto-Deployment mode?".

To deploy with the Auto-Deployment mode, you must create a script that automatically instantiates the virtual machines and provides the correct configuration files for each virtual machine.

In case of auto-deployment, some configuration files are needed to deploy the instance. Before the virtual machine receives the required configuration files, it remains in a waiting state.

To use the auto-deployment mode, the following three configuration files are required:

- `besclient.config` which must be copied into the `/var/opt/BESClient` local directory.
- `besrelay.config` which must be copied into the `/var/opt/BESRelay` local directory.
- `network.conf` which must be copied into the `/opt/bigFix/config` local directory.

The first two files contain some additional properties for the client and relay configurations. For the content of these files, see BigFix Platform on HCL Knowledge Center.



Note: The `besclient.config` and `besrelay.config` files are optional files. The client uses the default files if they are not provided. You must provide them only if you want to customize the virtual relay at startup time. For example, if you want to connect the virtual relay to another relay and not to the BigFix server, which is the default behavior.

The `network.conf` file contains the details about the network parameters of the deployed instances. It defines if the machine should start in DHCP mode or by using static IP settings. It must be the last configuration file to be copied. For details about the two different `network.conf` templates, see [Auto-Deployment \(on page 416\)](#).

After receiving the configuration file, the instance automatically starts the BESRelay and the BESClient services and registers with the BigFix server or with the relay specified in the previously defined configuration file.

The auto-deployment is particularly useful because:

- No further configurations are required.
- It allows an easy and rapid multiple deployment.



Note: Before enabling the auto-deployment mode, ensure that you have installed vSphere PowerCLI, needed to copy the `network.conf` file and the other configuration files.

Manually deploying a new BigFix Virtual Relay instance

In case of manual deployment, the network parameters request is automatically displayed.

If you specified "y" (yes) to the DHCP mode when creating the template, you are required to enter the host name used by the virtual machine instance and review the displayed DHCP information.

```
IBM BigFix Relay - Virtual Machine Instance Configuration Tool

This tool enables you to configure the BigFix Relay virtual machine instance

Network Configuration
Configure the network settings used by the virtual machine instance.
Enter the fully qualified domain name (FQDN) used by this Virtual Relay instance:
Host name (FQDN): [] virtualrelay.yourcompany.com
Review the displayed parameters.

Hostname: virtualrelay.yourcompany.com
Use DHCP: y
```

If you specified "n" (no) to the DHCP mode when creating the template, you are required to enter the host name used by the virtual machine instance and all the related network parameters.

```
IBM BigFix Relay - Virtual Machine Instance Configuration Tool

This tool enables you to configure the BigFix Relay virtual machine instance
```

Enter the static IP parameters of your network.

Network Configuration

Configure the network settings used by the virtual machine instance.

Enter the fully qualified domain name (FQDN) used by this Virtual Relay instance

Host name (FQDN): [] virtualrelay.yourcompany.com

Specify if you require DHCP to create the instance.

Use DHCP: [y!n] n

Enter the required parameters or press ENTER to confirm the values displayed.

Enter the IP Address: [] 10.1.57.25

Enter the Subnet Mask: [] 255.255.255.0

Enter the Broadcast Address: [10.1.57.255]

Enter the Gateway IP Address [] 10.1.57.254

Enter the Primary DNS Server IP Address: [] 10.1.57.1

(Optional) Enter the Secondary DNS Server IP Address: [] _

Review or confirm that the displayed parameters are correct by pressing ENTER.

Review the entered parameters and verify if they are correct.

```

      Hostname: virtualrelay.yourcompany.com
      Use DHCP: n
      IP Address: 10.1.57.25
      Netmask: 255.255.255.0
      Broadcast: 10.1.57.255
      Gateway: 10.1.57.254
      Primary DNS: 10.1.57.1
      Secondary DNS:

```

Is the configuration correct? [y!n] _

Confirm that the network configuration is correct by entering "y" (yes).

If during the template creation you specified "n" (no) for the masthead setup, the following panel is displayed:

Masthead Installation**BigFix Server (or Relay) IP Address:** [] 10.1.57.20**BigFix Server (or Relay) Deployment Port Number:** [52311] _

Enter the BigFix server parameters, IP address and port number.



Note: You cannot provide as an input into the configuration procedure of Tiny Core an authenticating relay (`_BESRelay_Comm_Authenticating=1`), because the current configuration procedure does not allow you to enter the password required to perform a registration to an authenticating relay. Therefore, the first parent relay of a Tiny Core relay cannot be an authenticating one. But once registered, the Tiny Core relay can be moved as a child of an authenticating relay and it can be configured to be itself an authenticating relay.



Note: Even if you specify the relay IP address, the Virtual Relay will connect directly to the server and not to the indicated relay.

The instance was configured successfully and the BESClient and the BESRelay services begin to start.

```
IBM BigFix Relay - Virtual Machine Instance successfully installed.
```

```
Successfully started the IBM BigFix BESClient
```

```
Successfully started the IBM BigFix BESRelay
```

Log in as **tc** user.

After logging in, the following information is available:

- The Virtual Relay name.
- The BigFix server IP address.
- The VMware Tools status (Running, Not running, Not installed).

```
IBM BigFix Relay - Virtual Machine Instance
Virtual Relay: virtualrelay
BigFix Server: 10.1.57.20
VMware tools : Running

tc@virtualrelay:~$ _
```

You can check the status of the BESClient and the BESRelay services as follows:

```
tc@nc109150:~$ /etc/init.d/besrelay status

The IBM BigFix BESRelay is running: (pid 1076)

tc@nc109150:~$ /etc/init.d/besclient status

The IBM BigFix BESClient is running: (pid 997)
```

The Virtual Relay instance is ready to use.

Maintenance

After completing Phase 3, the Virtual Relay is fully operational and communicates with the BigFix core server.

Additional configuration, such as setting the maximum relay cache size or changing the relay advertised name, can be done directly from the BigFix Console, exactly like any other BigFix relay.

No in-band mechanism for remotely accessing the shell is provided by default.

Using a Fixlet, you can manage the following two types of upgrade:

Client and relay components

The client and relay components upgrade will be performed by using a specific Fixlet which allows the components upgrade within the BigFix infrastructure.

Tiny Core Linux platform

The Tiny Core Linux platform upgrade will be performed by using a specific Fixlet which allows the component upgrade within the BigFix infrastructure.

Changing the shell password

To change the shell password, log in using the existing password, then issue the following command:

```
tc@virtualrelay:~$ sudo passwd tc_
```

You are prompted to enter the new password again.

To ensure the password persistence, insert the following three lines into the `/opt/.filetool.lst` file:

`etc/passwd`

`etc/shadow`

`etc/group`

and issue the following command:

```
tc@virtualrelay:~$ filetool.sh -b_
```



Note: These steps are performed automatically if you deploy using the Auto-Deployment mode.

Rebooting the Virtual Relay

If you are within the shell and need to reboot the system, issue the following command:

```
tc@virtualrelay:~$ sudo reboot _
```

Updating the Virtual Relay instance

After creating and deploying the virtual relay instance, you can still modify the deployed instance in terms of masthead installation or network configuration.

From the operating system command line, launch the script named `bigFixLaunchMastHeadConfiguration` to modify the BigFix server or relay IP address for the masthead installation.

From the operating system command line, launch the script named `bigFixLaunchNetworkConfiguration` to modify the current network parameters of the instance. For example, you can change an existing DHCP configuration into a network configuration that uses static IP parameters.

Time zone

After creating the template, you can still modify the current time zone set during the configuration by launching the script named `bigFixTimeZone` from the template shell command line as follows:

```
tc@virtualrelay:~$ bigFixTimeZone
Time zone setup
Enter the country code to set the time zone: [] it
Countries list:
  1 - Europe/Rome
Enter the number specific for your time zone: [] 1
The time zone was changed to Europe/Rome
Is the time zone correct? [y!n] _
```

After setting the new time zone, run the following operating system command:

```
tc@virtualrelay:~$ filetool.sh -b_
```

Troubleshooting

- All the steps performed to configure the BigFix Virtual Relay template and instance are logged in the `besSetup.log` file available in the `/opt/bigFix/log` directory. Only the steps that belong to the normal flow are logged, not the additional steps described in [Modifying the Virtual Relay template \(on page 417\)](#).
- Ensure that you start or restart the BigFix relay service using sudo permissions or logged in as root. Otherwise, an error message is returned and the relay service is not started.

Limitations

Double network interface

When creating the virtual machine, you can specify only one network adapter. Currently, the second network adapter is not supported.

VMware and Open VM tools

If during the template creation you specified "y" (yes) to the VMware Tools configuration, only a minimal set of Open VMware Tools was installed, because they are running on a Tiny Core Linux machine with a Text-based user interface only.

The minimal set provides the following capabilities:

- Automatic mouse grab and ungrab
- VMXnet3 network module instead of the PCNet32 module
- Host shared folder access using HGFS (mounted at `/mnt/hgfs`)
- Time synchronization with host
- Copy/paste to/from host/guest

To have the minimal set of Open VMware Tools up and running, the following additional libraries are automatically installed during the template creation (phase 2):

- fuse.tcz
- libdnet.tcz
- openssl-1.1.1.tcz
- open-vm-tools.tcz
- glib2.tcz
- libffi.tcz
- gamin.tcz
- pcre.tcz

**Note:**

You can download the libraries listed in the table from the following website:

<http://distro.ibiblio.org/tinycorelinux/>

In the Downloads section.

If during the template creation you specified "n" (no) to the VMware Tools configuration, you cannot use this feature.

You can set up the VMware Tools and install the full Open VMware Tools by using the following operating system command line:

```
tce-load -wi open-vm-tools.tcz
```

```
sudo touch /opt/bigFix/status/vmwareToolsReady
```

If you install the Open VMware Tools, you have the following capabilities:

- Automatic resizing of the desktop with the guest window including full screen support (reposition bar to upper left of desktop).
- Automatic mouse grab and ungrab.
- VMXnet3 network module instead of the PCNet32 module.

- Host shared folder access using HGFS (mounted at `/mnt/hgfs`).
- Time synchronization with the host.
- Copy/paste to/from host/guest.

Auto-Deployment

To instantiate the virtual relay instance by using the Auto-Deployment mode, you must copy the `network.conf` file into the `/opt/bigFix/config` directory of the instance that you are deploying.

Depending on the `network.conf` content, you enable the machine to start either in DHCP mode or with static IP settings.

If you want to use the machine with DHCP settings, insert in the `network.conf` file the following lines:

```
FQDN=virtualrelay.yourcompany.com
DHCP=y
```

If you want to use the machine with static IP settings, insert in the `network.conf` file the following lines:

```
FQDN=virtualrelay.yourcompany.com
DHCP=n
IPADDRESS=10.1.57.25
NETMASK=255.255.255.0
BROADCAST=10.1.57.255
GATEWAY=10.1.57.254
DNS1=10.1.57.100
```



Note: When creating the `network.conf` file, ensure that you follow the format of the provided samples. Do not leave any blank spaces in the lines that you insert.




Note: After creating the `network.conf` file, ensure that you convert it into a UNIX format, by using a tool such as the `dos2unix` utility.

Modifying the Virtual Relay template


After you create the Virtual Relay template, you can deploy all the required Virtual Relay instances.

After the deployment, when pressing the space bar during the boot phase displayed by the following screen capture:

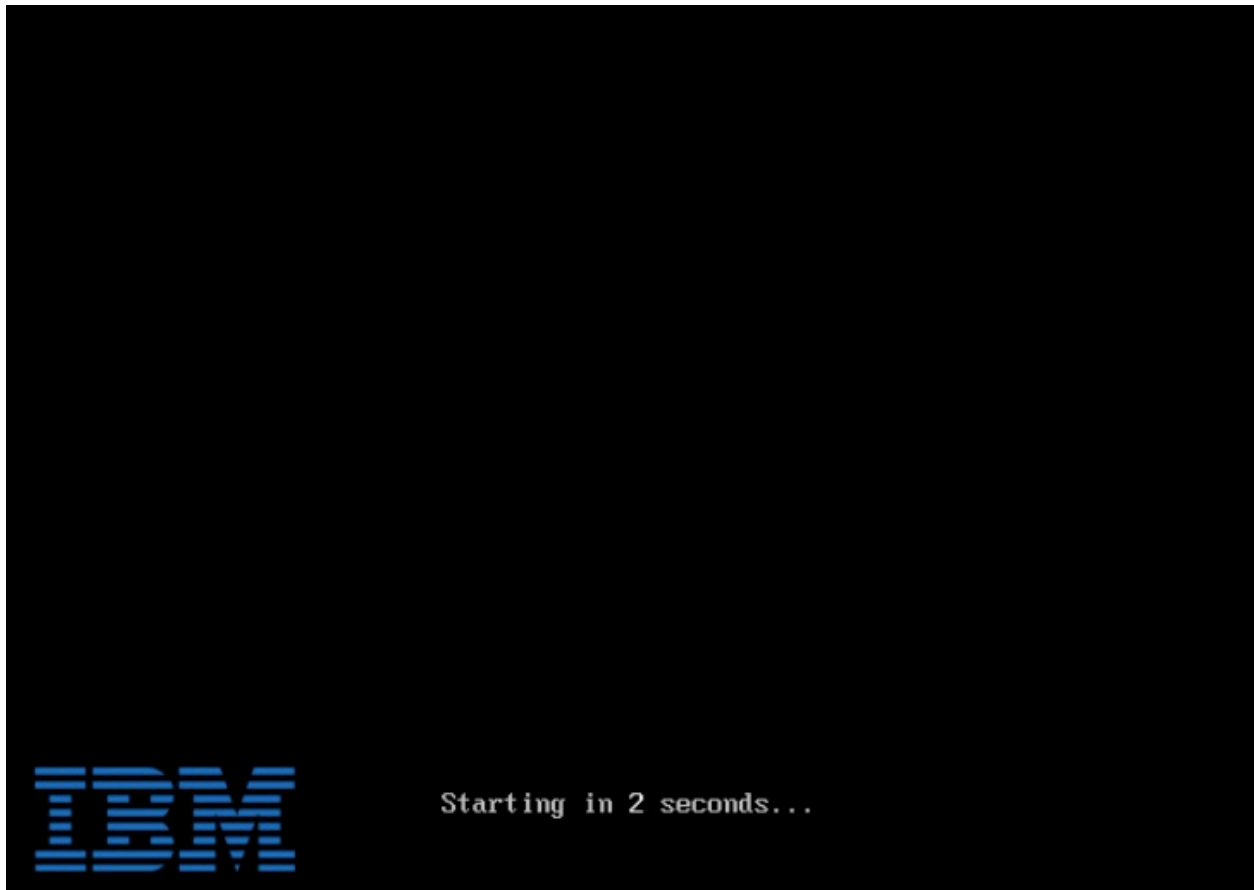

A menu opens and you can choose between two different options.


Normal Mode: allows you to continue with the instance setup.

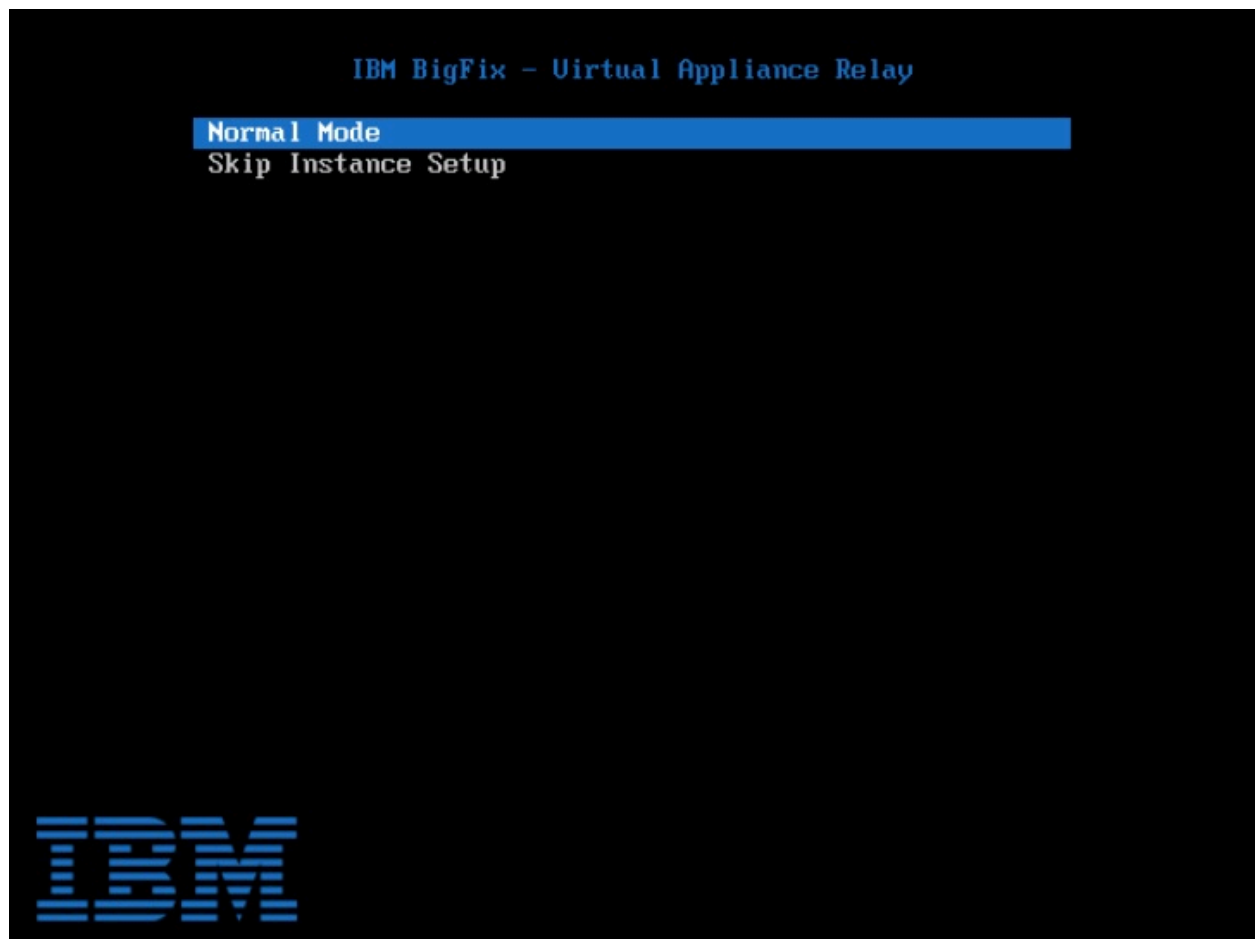

Skip Instance Setup: allows you to skip the instance setup and add additional extensions to the existing instance that can, later on, be converted into a new template (as described in [Creating the BigFix Virtual Relay template \(on page 406\)](#)) according to your business needs and used for future instance deployments, or simply used for the single deployment of the current instance that you modified.

If you configured the template using the network configuration option, you can install additional extensions by using the initial network settings.


Otherwise, if you configured the template using the local folder option, you can install additional extensions by downloading these additional packages locally.

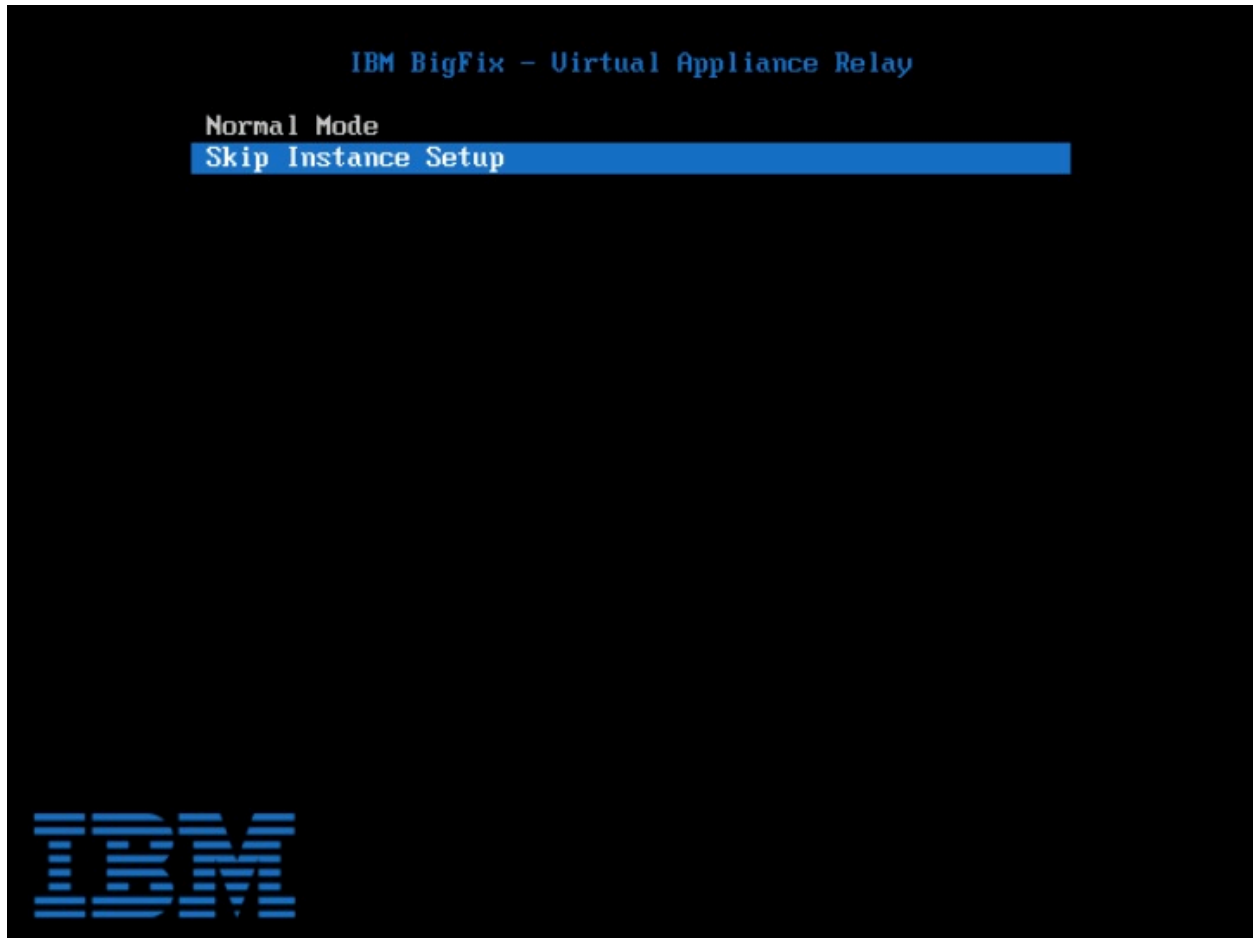

Chapter 15. Setting up a proxy connection

If your enterprise uses a proxy to access the Internet, your BigFix environment can use that communication path to gather content from sites.

In this case you must configure the connection to the proxy on the BigFix server.

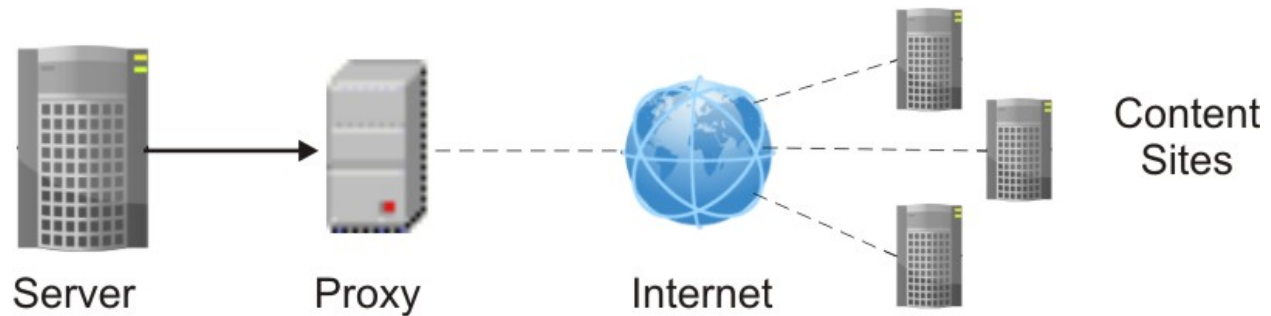

During a BigFix V9.5 fresh installation, you are asked if you want to configure the communication through a proxy. The configuration settings that you enter are saved and used at run time to gather content from sites. For information about configuring a proxy connection at installation time, see [Installing the Windows primary server \(on page 113\)](#) for Windows systems, or [Installing the Server \(on page 166\)](#) for Linux systems.

To specify or modify the configuration for communicating with a proxy after installation, follow the instructions provided in [Setting a proxy connection on the server \(on page 427\)](#).



Important: If this configuration step is needed and you skip it, your environment will not work properly. A symptom of this misbehavior is that the site contents are not displayed on the console.




Note: You can also keep your system physical disconnected from the Internet by using an air-gapped implementation. For more information about this implementation, see [Downloading files in air-gapped environments](#).

In addition to the gather process, the BigFix server or a relay can use the proxy connection to do component-to-component communication or to download files from the Internet.

The following list shows the most common proxy configurations that apply to a BigFix environment:

A relay connected to the Internet through a proxy to download files

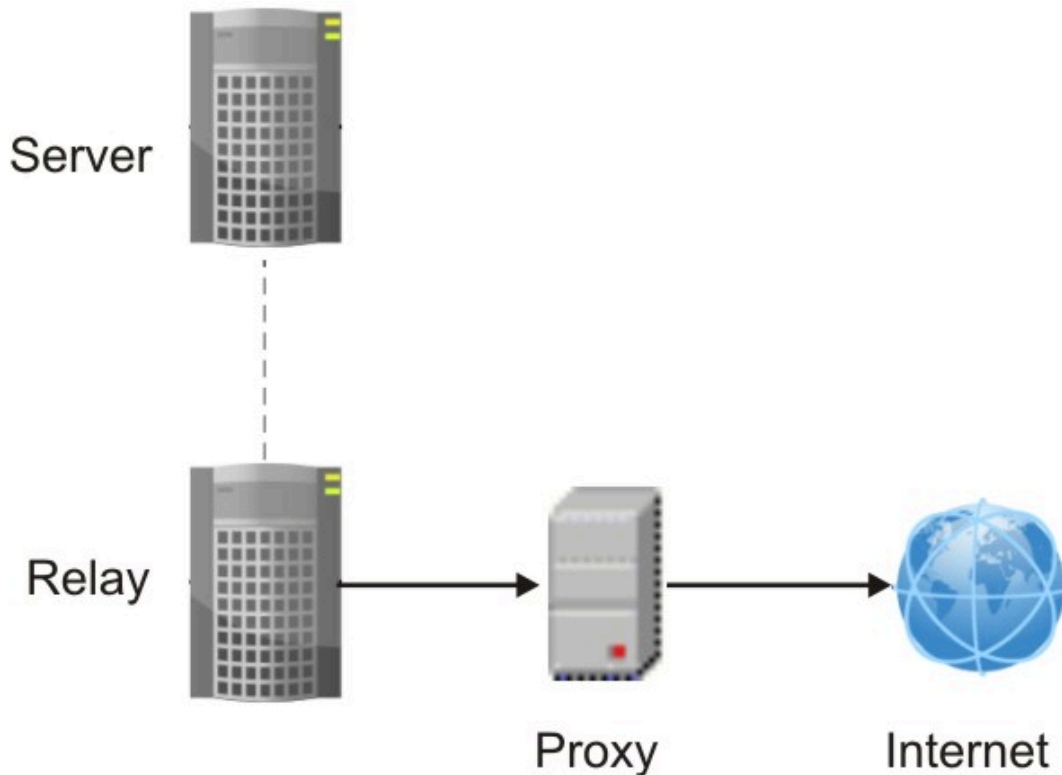

To set this configuration on the relay:

1. Run the steps that are described in [Setting up a proxy connection on a relay \(on page 432\)](#) to configure on the relay the communication to the proxy.
2. From the BigFix console set on the relay the following additional values to ensure that data is downloaded exclusively from the internet rather than from the parent relay:


```
_BESGather_Download_CheckParentFlag = 0  
_BESGather_Download_CheckInternetFlag = 1
```

For more information about these configuration settings, see Gathering content.




Note: To prevent communication from the relay to the server from going through the proxy, ensure that the proxy exception list is set on the relay as follows: "127.0.0.1, localhost, <serverIP_address>, yourdomain.com".

A client connected through a proxy to communicate with its parent relay

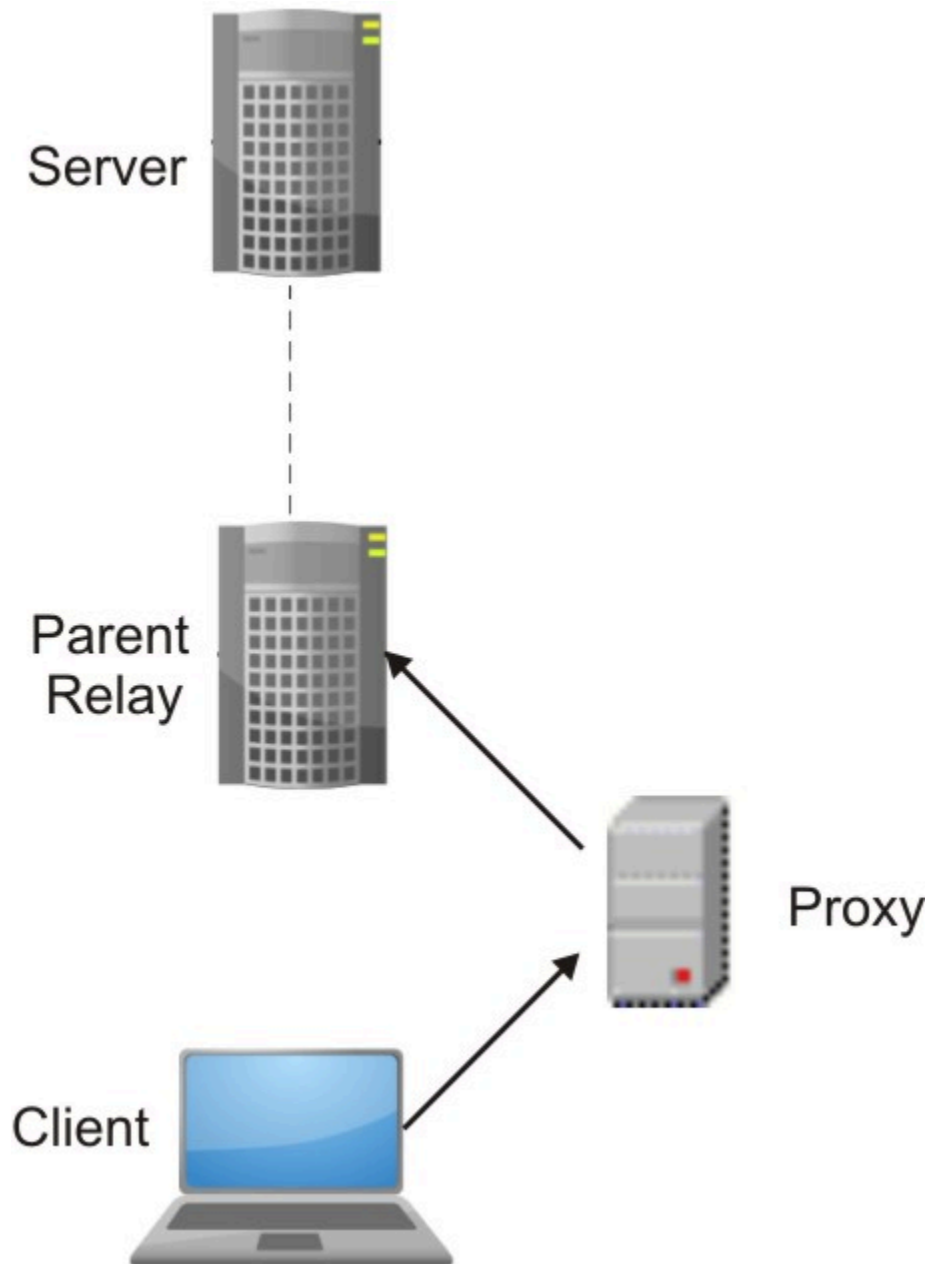

To set this configuration, on the client run the steps that are described in [Setting up a proxy connection on a client \(on page 436\)](#) and in [Enabling client polling \(on page 425\)](#).

A relay connected through a proxy to communicate with a parent relay

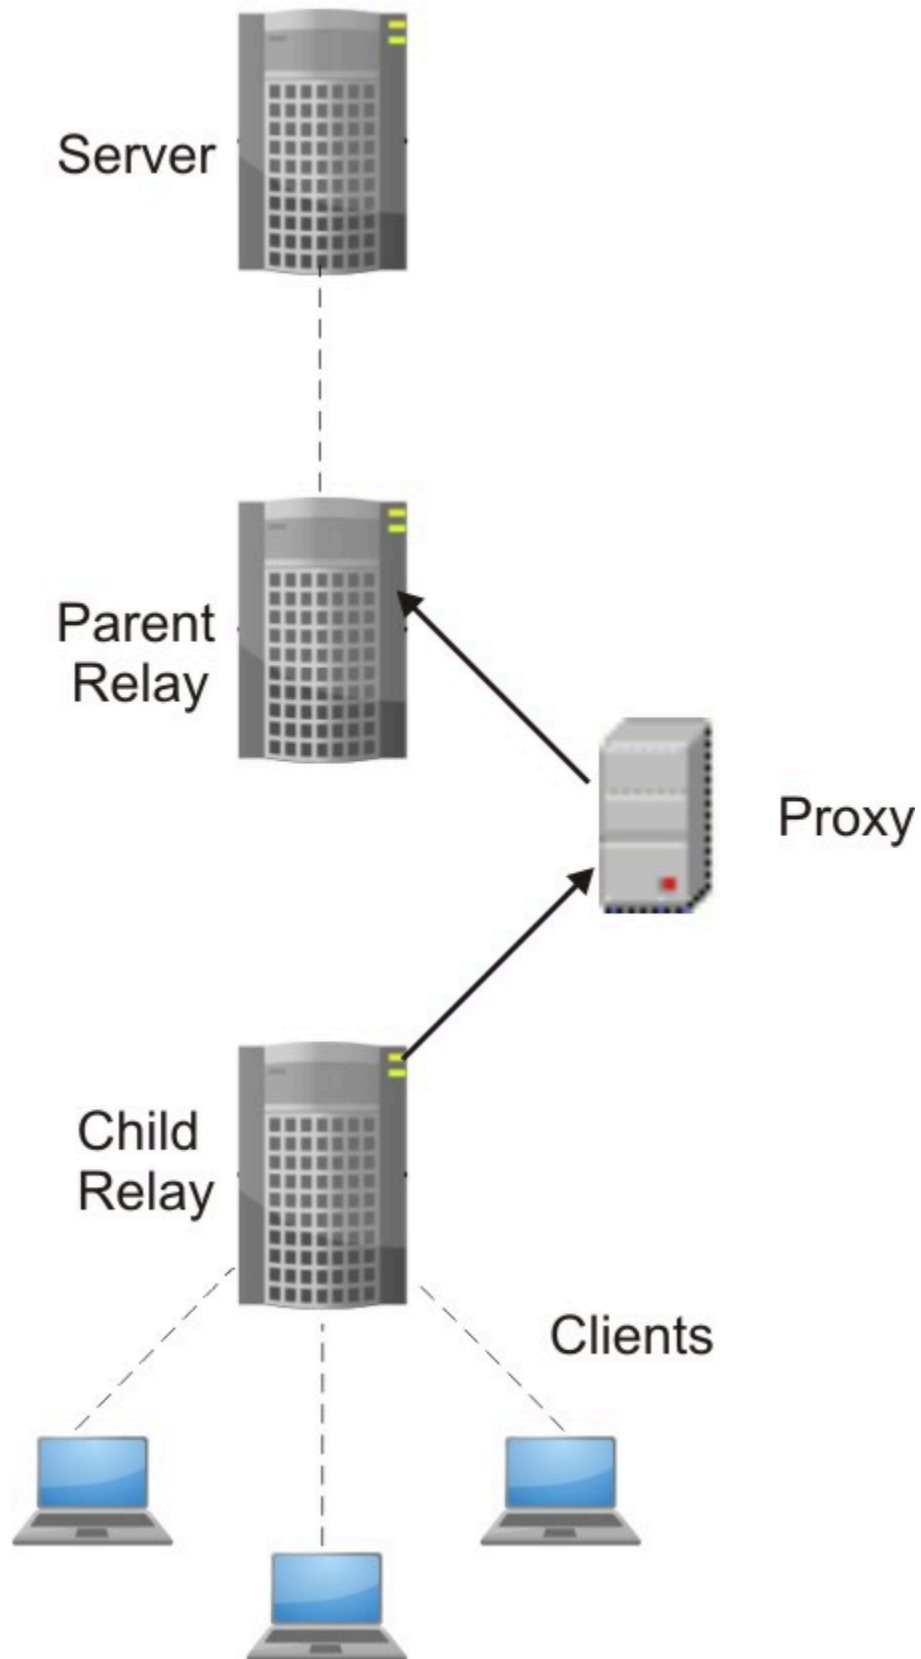

Complete these steps to implement this configuration:

- On the child relay run the steps that are described in [Setting up a proxy connection on a relay \(on page 432\)](#) and in [Enabling client polling \(on page 425\)](#).
- Disable the relay notifier on the parent relay.

Enabling client polling

If an HTTP proxy exists between a parent relay and a client or child relay, or between the server and a child node, apply this workaround to bypass a limitation, that is caused by the proxy and that affects downstream communications.

An HTTP proxy does not forward the UDP protocol, which is the protocol used for sending notifications to clients in an BigFix environment. In such a configuration, the client on the child node must be able to ping and to query the relay on the parent node for new instructions.

To allow this behavior, complete the following configuration steps from the console on the client on the child node:

1. Open the console and go to the **Computer** section under the **All Content** domain.
2. Select the computer where the client is installed.
3. Right-click the computer and select **Edit Settings**.
4. Select **Add** to create a custom setting.
5. Enter the **Setting Name** and **Setting Value** as specified in the following table:

Table 7. Prerequisites to configure a proxy communication on a client

Setting	Description
<code>_BESClient_Comm_CommandPollEnable = 1</code>	Enables the client to poll its parent relay for new actions.

Setting	Description
<pre>_BESClient_Comm_ CommandPollIntervalSeconds = <i>nnn</i></pre>	Determines how often the client checks with its parent relay to gather or refresh content if <code>_BESClient_Comm_CommandPollEnable</code> is enabled. To prevent performance degradation, avoid specifying settings that are less than 900 seconds. Value range is 0-4294967295.
<pre>__RelaySelect_Automatic = 0</pre>	Specifies that the client is not configured for automatic parent relay selection. Clients that are configured for automatic parent relay selection cannot communicate through a proxy with their parent relay because they must be able to ping the relay.

6. Click **OK** to activate the settings.



Important: If you skip this step, the relays cannot communicate with child nodes through the proxy.

Connecting the console to the server through a proxy

If the BigFix console is installed on the same system as the BigFix server and if a proxy configuration is set in Internet Explorer, then ensure that, in that configuration, the **Bypass proxy server for local addresses** and the **Exceptions** settings are correctly specified.

If the BigFix console is installed on a system different from the system where the BigFix server is installed, then ensure that the proxy is correctly configured in Internet Explorer on the console system.

Setting a proxy connection on the server

When you install BigFix V9.5, you are asked if you want to set up communication with a proxy.

If you did not configure the connection to the proxy at installation time or if you want to modify the existing configuration, you can edit the proxy configuration settings after installation by running the following command:

On Windows systems:

```
%PROGRAM FILES%\BigFix Enterprise\BES Server\BESAdmin.exe /setpr
oxy
[/proxy:<proxy_host>[:<proxy_port>] [/user:<proxy_username> /pas
s:<proxy_password>]
[/delete]
[/exceptionlist:<proxy_exceptionlist>]
[/proxysecuretunnel:{false|true}]
[/proxyauthmethods:{basic|digest|negotiate|ntlm}]
[/proxydownstream:{false|true}]] |
[/delete]
```

On Linux systems:

```
/opt/BESServer/bin/BESAdmin.sh -setproxy [-proxy=<proxy_host>[:<
proxy_port>]
[-user=<proxy_username> -pass=<proxy_password>]
[-exceptionlist=<proxy_exceptionlist>]
[-proxysecuretunnel={false|true}]
[-proxyauthmethods={basic|digest|negotiate|ntlm}]
[-proxydownstream={false|true}]] |
[-delete] |
[-display]
```

where you can specify the following keys:

proxy

It sets the host name or IP address and, optionally, the port number of the proxy machine. By default the value of *proxy_port* is 80.

user

It sets the user name that is used to authenticate with the proxy, if the proxy requires authentication.

If you installed your BigFix server on a Windows system and your proxy requires Kerberos Authentication, use the format *user@mydomain.com*.



Note: The Kerberos Authentication is supported only on Windows systems. This authentication method is not supported if you installed your BigFix server on a Linux system.

If your proxy requires NTLM Authentication, specify the NTLM user.

If your proxy requires the realm name notation, specify the *proxy_user* as *user@mydomain.com* or *mydomain\user*.



Note: The Linux shell manages the back slash "\" as an escape character. Specify either *mydomain\\user* or "*mydomain\user*" to use the notation *mydomain\user* if you run the command in a Linux shell.

pass

It sets the password that is used to authenticate with the proxy, if the proxy requires authentication. The value that is assigned to the password is encrypted in the registry on Windows systems or obfuscated in the configuration file on Linux systems.

delete

If specified, it deletes all the settings defined in BigFix for communicating with the specified proxy.

display

If specified, it displays the proxy communication settings defined in BigFix.

This argument applies only to Linux systems.

exceptionlist

If set, it is a comma-separated list of computers and domains that must be reached without passing through the proxy. In this syntax blank spaces have no influence. Each name in this list is matched as either a domain, which contains the hostname, or the hostname itself. For example, `yourdomain.com` would match `yourdomain.com`, `yourdomain.com:80`, and `www.yourdomain.com`, but not `www.notyourdomain.com`. You can assign the following sample values to `<proxy_exceptionlist>`:

```
localhost,127.0.0.1, yourdomain.com
localhost,127.0.0.1,yourdomain.com,8.168.117.65
"localhost,127.0.0.1, yourdomain.com, 8.168.117.65"
```

By default, if you do not specify the **exceptionlist** setting, BigFix V9.5 prevents diverting internal communications from being diverted towards the proxy. This is equivalent to setting **exceptionlist:localhost,127.0.0.1**. To maintain this behavior, ensure that you add `localhost, 127.0.0.1` to the list of exceptions when specifying the **exceptionlist** setting.

proxysecuretunnel

If set, it defines whether or not the proxy is enforced to attempt tunneling. By default the proxy does not attempt tunneling.

proxyauthmethods

If set, it restricts the set of authentication methods that can be used. You can specify more than one value separated by a comma, for example:

```
proxyauthmethods:basic,ntlm
```

By default there is no restriction for the authentication method. The proxy chooses which authentication method must be used.



Note: If you specify to use the `negotiate` authentication method on a Linux server or relay, a different authentication method might be used.



Note:

If you want to enable FIPS mode, ensure that the proxy configuration uses:

- An authentication method other than `digest` on Windows systems.
- An authentication method other than `digest`, `negotiate` or `ntlm` on Linux systems.


proxydownstream

If set to **true**, this setting indicates that all HTTP communications in your BigFix environment also pass through the proxy. If you do not specify this setting, by default the value **false** is assumed.



Note: If you migrate an existing BigFix proxy configuration to V9.5 and the `_Enterprise Server _ClientRegister _Proxy*` keys are specified, by default `proxydownstream` is set to **true**.

On Windows servers the command `BESAdmin.exe /setproxy` opens the Proxy settings panel filled in the current proxy settings.

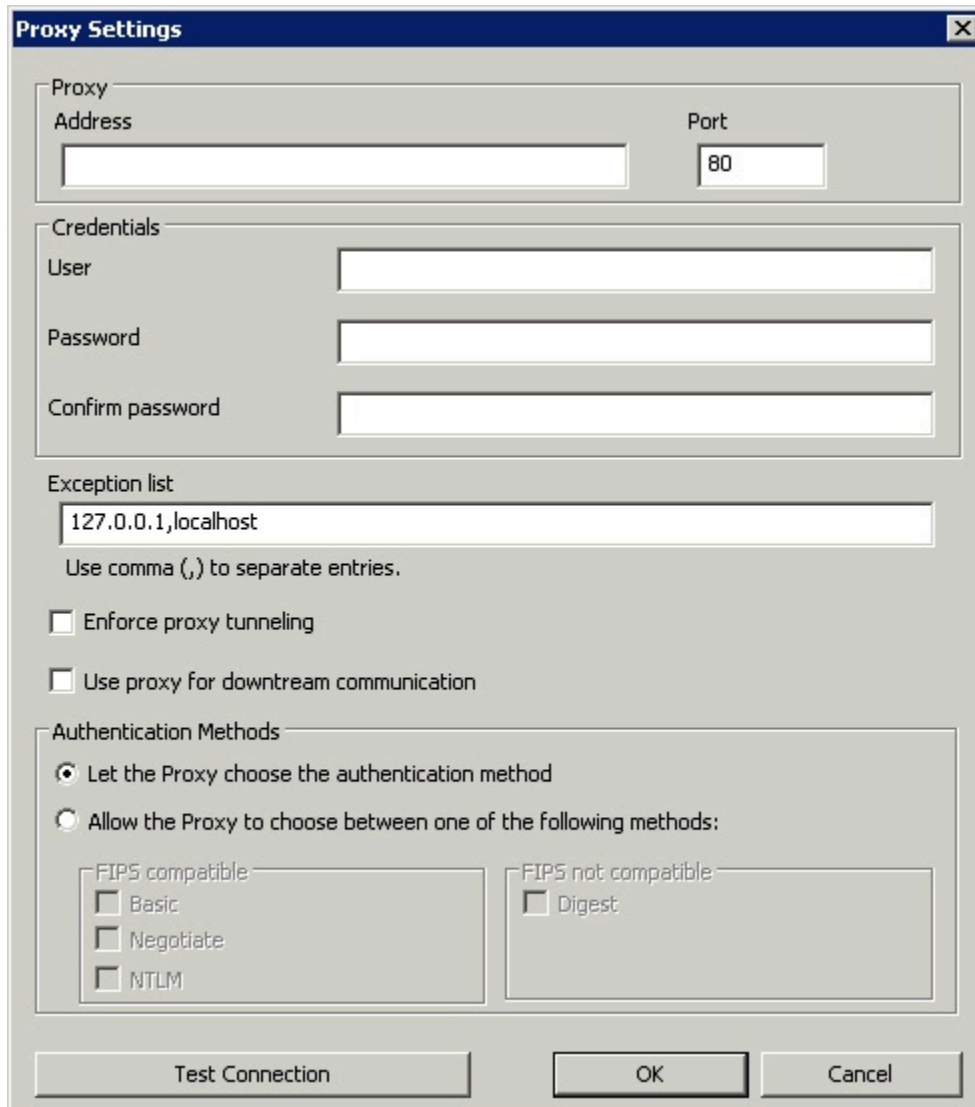

The image shows a 'Proxy Settings' dialog box with the following sections:

- Proxy:**
 - Address:** A text input field.
 - Port:** A text input field containing the value '80'.
- Credentials:**
 - User:** A text input field.
 - Password:** A text input field.
 - Confirm password:** A text input field.
- Exception list:**
 - A text input field containing '127.0.0.1,localhost'.
 - A note: 'Use comma (,) to separate entries.'
- Options:**
 - ☐ Enforce proxy tunneling
 - ☐ Use proxy for downstream communication
- Authentication Methods:**
 - ☒ Let the Proxy choose the authentication method
 - ☐ Allow the Proxy to choose between one of the following methods:
 - FIPS compatible:**
 - ☐ Basic
 - ☐ Negotiate
 - ☐ NTLM
 - FIPS not compatible:**
 - ☐ Digest
- Buttons:**
 - Test Connection
 - OK
 - Cancel

The same panel is displayed whenever you run the `BESAdmin.exe` command to set one or more specific proxy settings. Check that the values displayed are correct, modify them if necessary and then click **OK** to confirm the changes.

The proxy configuration settings are stored:

On Windows systems:

In the registry key `HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\BigFix\EnterpriseClient\Settings\Client\`.

On Linux systems:

In the following sections of the `besserver.config` file:

- [SOFTWARE\BigFix\EnterpriseClient\Settings\Client_EnterpriseServer_ClientRegister_ProxyServer]
- [SOFTWARE\BigFix\EnterpriseClient\Settings\Client_EnterpriseServer_ClientRegister_ProxyPort]
- [SOFTWARE\BigFix\EnterpriseClient\Settings\Client_EnterpriseServer_ClientRegister_ProxyUser]
- [SOFTWARE\BigFix\EnterpriseClient\Settings\Client_EnterpriseServer_ClientRegister_ProxyPass]



Important: Whenever you run the BESAdmin command to define a proxy setting, ensure that you specify all not default setting previously defined otherwise they will be set to blank. This behavior applies to both Windows and Linux systems.



Note: Ensure that you use the **Edit Settings** dialog box on the BigFix Console to update any proxy values that you set through the **Edit Settings** dialog box.



Note: If a HTTP proxy exists between the server and a child node, ensure that you follow the instructions provided in [Enabling client polling \(on page 425\)](#) to enable downstream communications.



Note: The BES components that access the internet run, by default, as SYSTEM account on the Windows systems and as root on the Linux systems.

For additional configuration settings that you can use to configure your BigFix environment, see List of settings and detailed descriptions.

Setting up a proxy connection on a relay

Complete the following steps to allow the relay to communicate with its parent components:

1. Open the console and go to the **Computer** section under the **All Content** domain.
2. Select the computer where the relay is installed.
3. Right-click the computer and select **Edit Settings**.
4. Select **Add** to create custom settings.
5. Enter the **Setting Name** and **Setting Value** listed in the following table:

Table 8. Proxy configuration settings for server and relays

Setting Name	Setting Value	Details
_Enterprise Server _ClientRegis ter _ProxyServer	Sets the hostname that is used to reach the proxy.	Default Value: None Type: String Value Range: N/A Mandatory: No
_Enterprise Server _ClientRegis ter _ProxyPort	Sets the port that is used by the proxy server.	Default Value: None Type: Numeric Value Range: N/A Mandatory: No
_Enterprise Server _ClientRegis ter _ProxyUser	Sets the user name that is used to authenticate with the proxy if the proxy requires authentication.	Default Value: None Type: String Value Range: N/A Mandatory: No (depend- ing on the authentication method)
_Enterprise Server _ClientRegis ter _ProxyPass	Sets the password that is used to authenticate with the proxy if the proxy requires authentication.	Default Value: None Type: String Value Range: N/A Mandatory: No (depend- ing

Setting Name	Setting Value	Details
		on the authentication method)
_Enterprise Server _ClientRegis ter _ProxySecure Tunnel	If set, it defines whether or not the proxy is enforced to attempt tunneling. By default the proxy does not attempt tunneling.	Default Value: false Type: Boolean Value Range: 0 1 Mandatory: No
_Enterprise Server _ClientRegis ter _ProxyAuthMe thods Allowed	Restricts the set of authentication methods that can be used. You can specify more than one value separated by a comma. For information about restrictions affecting the supported authentication methods when using FIPS, see Setting a proxy connection on the server (on page 427) .	Default Value: None (Any) Type: String Value Range: basic digest negotiate ntlm Mandatory: No
_Enterprise Server _ClientRegis ter _ProxyUseFor DownstreamCo mm	If set to 1 , this setting indicates that all downstream communications in your environment pass through the proxy.	Default Value: 0 Type: Numeric Value Range: 0 1 Mandatory: No
_Enterprise Server _ClientRegis ter	Specifies the computers, for example the parent relay, domains and subnetworks that must be reached by the relay without pass-	Default Value: local-host, 127.0.0.1 (internal communica- tions)

Setting Name	Setting Value	Details
<code>_ProxyExceptionList</code>	ing through the proxy. Use the following format: <pre>"localhost, 127.0.0.1, hostname1, hostname2, IP_Addr_A, IP_Addr_B, domain_Z, domain_Y, ..."</pre>	are not diverted towards the proxy) Type: String Value Range: N/A Mandatory: No

By default internal communications are not diverted towards the proxy. To maintain this behavior, ensure that you include `localhost, 127.0.0.1` in the list of exceptions when specifying a value for this setting.



Note: Ensure that you read [Setting up a proxy connection \(on page 420\)](#) to learn more about using the proxy exception list on a relay thru the samples.

For more information about how to specify the proxy settings, see [Setting a proxy connection on the server \(on page 427\)](#).

6. Click **OK** to send activate the configuration settings.



Note: If a HTTP proxy exists between the relay and a client or a child relay, ensure that you follow the instructions provided in [Enabling client polling \(on page 425\)](#) to enable downstream communications.

Complete these additional steps if you want to allow your relay to download files from the internet through the proxy:

1. Open the console and go to the **Computer** section under the **All Content** domain.
2. Select the computer where the relay is installed.
3. Right-click the computer and select **Edit Settings**.
4. Select **Add** to create the following custom settings:

```
_BESGather_Download_CheckInternetFlag = 1
_BESGather_Download_CheckParentFlag = 0
```

5. Click **OK** to activate the configuration settings.

For additional configuration settings that you can use to configure your BigFix environment, see List of settings and detailed descriptions.

Setting up a proxy connection on a client

To set the proxy connection on the client, complete the following steps:

1. Open the console and go to the **Computer** section under the **All Content** domain.
2. Select the computer where the client is installed.
3. Right-click the computer and select **Edit Settings**.
4. Select **Add** to create a custom setting.
5. Enter the **Setting Name** and **Setting Value** as described in the table contained in the next section.
6. Click **OK** to activate the settings.

Table 9. Proxy client configuration settings

Setting Name	Setting Value	Details
<code>_BESClient_Comm _ProxyServer</code>	Sets the hostname that is used to reach the proxy.	Default Value: None Type: String Value Range: N/A Mandatory: Yes

Table 9. Proxy client configuration settings (continued)

Setting Name	Setting Value	Details
<code>_BESClient_Comm _ProxyPort</code>	Sets the port that is used to communicate with the proxy.	Default Value: None Type: Numeric Value Range: N/A Mandatory: No
<code>_BESClient_Comm _ProxyUser</code>	Sets the user name that is used to authenticate with the proxy if the proxy requires authentication.	Default Value: None Type: String Value Range: N/A Mandatory: No (depending on the authentication method)
<code>_BESClient_Comm _ProxyPass</code>	Sets the password that is used to authenticate with the proxy if the proxy requires authentication.	Default Value: None Type: String Value Range: N/A Mandatory: No (depending on the authentication method)
<code>_BESClient_Comm _ProxyManualTryDirect</code>	Specifies whether direct connections can be used. This setting applies if the connection to the proxy uses the host-name or IP Address and port number that are specified in <code>_BESClient_Comm _ProxyServer</code> and <code>_BESClient_Comm _ProxyPort</code> . These values are available:	Default Value: 2 Type: Numeric Value Range: 0-2 Mandatory: No

0

Table 9. Proxy client configuration settings (continued)

Setting Name	Setting Value	Details
	Do not try direct connection.	
	1	
	Try direct connection if a proxy connection cannot be established.	
	2	
	Try direct connection first.	



Note: On Linux systems, at run time, the BigFix searches and, if specified, uses the configuration stored in the client configuration file. If the requested configuration is not specified in the client configuration file, the product searches for it in the server configuration file, or in the relay configuration file. Consider this behavior when defining the proxy configuration on the BigFix server or relay.

**Note:**

The BigFix client allows using the proxy basic authentication on any platform. While the following authentications can be used on Windows platforms only:

- Digest
- Negotiate
- NTLM

**Note:**

When the connection to the relay succeeds, the resulting proxy is locked in for all subsequent communications and the values for the proxy server and proxy port



are saved as AutoProxyServer and AutoProxyPort in the Global section of the client settings.

If the client is installed on a Windows system where Internet Explorer is configured to use a proxy, then, by default, BigFix uses the Internet Explorer configuration to communicate with the proxy. The following table shows the additional settings and behaviors that you can optionally specify on Windows platform:

Table 10. Proxy client additional configuration settings on Windows systems

Setting Name	Setting Value	Details
<code>_BESClient_Comm</code> <code>_ProxyAutoDetect</code>	Specifies whether the system uses the proxy configuration settings that are specified for Internet Explorer. The following values are available:	Default Value: 1 Type: Boolean Value Range: 0-1 Mandatory: No
	0 Use the values that are specified in <code>_BESClient_Comm</code> <code>_ProxyServer</code> and <code>_BESClient_Comm_ProxyPort</code> .	
	1 Use the Internet Explorer configuration settings.	
	 Important: Ensure that at least one user is logged in to the client to be able to get the Internet Explorer configuration settings.	

Table 10. Proxy client additional configuration settings on Windows systems (continued)

Setting Name	Setting Value	Details
<code>_BESClient_Comm</code> <code>_ProxyAutoDetectTryDirect</code>	Specifies whether direct connections can be used when the system uses the proxy configuration settings that are specified for Internet Explorer. This setting is valid only if <code>_BESClient_Comm</code> <code>_ProxyAutoDetect</code> = 1. The following values are available: 0 Do not try direct connection. 1 Try direct connection if a proxy connection cannot be established. 2 Try direct connection first.	Default Value: 1 Type: Numeric Value Range: 0-2 Mandatory: No
<code>AutoProxyRawProxyList</code>	Specifies a blank space delimited list of proxies to try to connect to.  Note: This setting must be manually saved as a registry key under the following Windows registry path: <code>HKLM\Software\BigFix\Enterprise-Client\GlobalOptions</code> .	Default Value: None Type: String Value Range: N/A Mandatory: No

Table 10. Proxy client additional configuration settings on Windows systems
(continued)

Setting Name	Setting Value	Details
AutoProxyRawBypass List	Specifies a blank space delimited list of URLs to contact directly without passing through the proxy. You can use the "*" as a wildcard.	Default Value: None Type: String Value Range: N/A Mandatory: No
	 Note: This setting must be manually saved as a registry key under the following Windows registry path: HKLM\Software\BigFix\Enterprise-Client\GlobalOptions.	

For additional configuration settings that you can use to configure your BigFix environment, see List of settings and detailed descriptions.

Best practices to consider when defining a proxy connection

Consider the following tips and tricks to avoid common problems:

- After you set the communication through the proxy on a Windows server, use the BigFix Diagnostic tools to verify that the server can successfully reach the Internet.
- Check the **GatherDB.log** file that is in the **BES Server\GatherDBData** folder to verify that the server can gather data from the Internet.
- Check in the firewall rules if any file types are blocked. In this case, if the content to gather from a site contains at least one file with this file type, then the entire content of that site is not gathered.
- Ensure that the password specified in ProxyPass on the server, or in _Enterprise Server_ClientRegister_ProxyPass on the client or relay did not expire.

- Make sure that the proxy allows the downloading of arbitrary files from the Internet (for example, it does not block .exe downloads or does not block files with unknown extensions).
- Most of the files in BigFix are downloaded from `bigfix.com` or `microsoft.com` using HTTP port 80. However, it is recommended that you allow the proxy service to download from any location using HTTP, HTTPS, or FTP because some downloads might use these protocols.
- Make sure that the proxy is bypassed for internal network and component-to-component communications because it might cause problems with how the BigFix server works and is inefficient for the proxy. Use the `ProxyExceptionList` setting, if needed, to exclude local systems from the communication through the proxy.
- The setting `ProxyExceptionList` was introduced in BigFix version 9.0.835.0 for Windows and Linux systems. If you are using BigFix version 9.0 and you have problems using content that downloads files from the local server, upgrade to BigFix version 9.0.835.0 or later.
- On the BigFix server installed on a Linux system, at runtime the client configuration file is read before the server configuration file. Ensure that you update common settings on both components to avoid conflicts.
- By default the HTTP and HTTPS connections time out after 10 seconds, DNS resolution time included. When this happens the HTTP 28 error is logged. In your environment, if the proxy server or the DNS server takes a longer time to establish the TCP connection, you can increase the number of seconds before the connection times out by editing the setting `_HTTPRequestSender_Connect_TimeoutSecond`. The `_HTTPRequestSender_Connect_TimeoutSecond` setting affects all the BigFix components, including the Console and the Client, running on the machine for which this setting is set. No other BigFix component running on other machines in the deployment is affected by the setting. As a best practice, be careful when increasing the value of this setting and try to keep it as low as possible to avoid opening too many sockets concurrently risking socket exhaustion and eventual loss of service.

For more information about proxy configuration, see <https://bigfix-wiki.hcltechsw.com/wikis/home?lang=en-us#!/wiki/BigFix%20Wiki/page/Proxy%20Server%20Settings>.

Troubleshooting proxy connection

Common problems you might find with a proxy connection.

Setting up a proxy connection to have your environment work properly is not an easy task, and you might have problems with your configuration. This is a list of the most common issues along with their solutions.

Error Unable to get site content (failed to pass sha1 hash value checks in BESRelay.log

Error in getting site content.

This error is a symptom that something is interfering with the process of downloading external Fixlet sites, for example patches for Windows. You might notice that you do not gather the latest version of external content sites you are subscribed to, or that you do not gather at all from sites whose name is listed in the License overview dashboard. In this instance, the error `Unable to get site content (failed to pass sha1 hash value checks)` is listed in the `BesRelay.log` file; this file is located in:

Windows operating systems

- 32bit systems: `C:\Program Files\BigFix Enterprise\BES Server`
- 64bit systems: `C:\Program Files (x86)\BigFix Enterprise\BES Server`

Linux operating systems

`/var/log/BESRelay.log`

The reason is often a firewall or a web proxy that is filtering the content exchanged between the BigFix server and the `sync.bigfix.com` server.

To fix the problem, ask the system administrator to allow downloading traffic for the BES Gather service on port 80. If the problem persists, complete a traffic packet analysis to find the problem. An useful tool to perform a full network protocol analysis is [Wireshark](#).

Error Unexpected HTTP response: 503 Service Unavailable in GatherDB.log

Error for service unavailability.

The BigFix server communication with the Gather database is performed through the IP address 127.0.0.1 and the database does not need a proxy configuration. In the event the error message Unexpected HTTP response: 503 Service Unavailable is repeatedly listed in the GatherDB.log file, you must check that the environment variable HTTP_PROXY has not been set if it is not used in your environment, or you must set the environment variable NO_PROXY to the value 127.0.0.1. After completing these changes, restart the BESGatherDB service.

The log file GatherDB.log is located in:

Windows operating systems

- 32bit systems: C:\Program Files\BigFix Enterprise\BES Server\GatherDBData
- 64bit systems: C:\Program Files (x86)\BigFix Enterprise\BES Server\GatherDBData

Linux operating systems

/var/opt/BESServer/GatherDBData

How to check if the proxy configuration is correct

Checks for proxy configuration.

In a command prompt of the BigFix server, run the following command:

```
curl -x <proxy hostname>:<proxy port> --proxy-user <username>:<password>  
http://sync.bigfix.com/cgi-bin/bfgather/bessupport
```

where:

- `<proxy_hostname>:<proxy_port>` are the host name or IP address and the port number of the proxy server.
- `<username>:<password>` are the username and password used to authenticate to the proxy server.

If you get a result similar to the following:

```
MIME-Version: 1.0
Content-Type: multipart/signed; protocol="application/x-pkcs7-signature";
    micalg="sha-256,sha1"; boundary="----B64F18ABD54D2355B260FA851C81B467"

This is an S/MIME signed message

-----B64F18ABD54D2355B260FA851C81B467
MIME-Version: 1.0
Content-Type: multipart/x-directory2;
    boundary="=DkNtJtPxyvgg7l(ktApiDsZBnMvYtSm"
FullSiteURL: http://sync.bigfix.com/bfsites/bessupport_1369/__fullsite
FullSiteURLSize: 1507388
SiteDiffBaseURL: http://sync.bigfix.com/bfsites/bessupport_1369/__diffsite
SiteDiffList: 1111111111
Version: 1369

--=DkNtJtPxyvgg7l(ktApiDsZBnMvYtSm

URL: http://sync.bigfix.com/bfsites/bessupport_1369/1Common%20Tasks.fxf
NAME: 1Common%20Tasks.fxf
MODIFIED: Fri, 05 May 2017 22:12:57 +0000
SIZE: 258246
TYPE: FILE
HASH: 6882d98104c25cd3c27fc343d8cfb73a09c30945
```

HASHINFO:

```
sha256,055b37a65160db26396e72488bd021ffbe6d06ddc19e0c494f5f0cbf73ea8cd1
```

your proxy configuration is correct. If not, ask your system administrator to check why the BigFix synchronization site cannot be accessed.

New site version cannot be gathered

Errors in gathering site version.

If you get the following errors when running the BigFix diagnostic tool:

Test failed: The Client Plug-in registration

Reason: Unexpected HTTP response: 504 Proxy Error: Unable to connect to remote host "127.0.0.1:52311" or host not responding - URL

```
"http://127.0.0.1:52311/cgi-bin/bfenterprise/clientregister.exe?RequestType
=
```

```
version"(http://127.0.0.1:52311/cgi-bin/bfenterprise/clientregister.exe
?RequestType=version%27),
```

errno: 111 HTTP request failed with an error.

Test failed: Plug-post results

Reason: Unexpected HTTP response: 504 Proxy Error: Unable to connect to remote

host "127.0.0.1:52311" or host not responding - URL

```
"http://127.0.0.1:52311/cgi-bin/bfenterprise/PostResults.exe"
```

```
(http://127.0.0.1:52311/cgi-bin/bfenterprise/PostResults.exe%27),
```

errno: 111 HTTP request failed with an error.

Test failed: BESGatherMirror plug-in

Reason: Unexpected HTTP response: 504 Proxy Error: Unable to connect to remote host "127.0.0.1:52311" or host not responding - URL

```
"http://127.0.0.1:52311/cgi-bin/bfenterprise/BESGatherMirror.exe/-version]
```

```
"([http://127.0.0.1:52311/cgi-bin/bfenterprise/BESGatherMirror.exe/-version%27),  
errno: 111 HTTP request failed with an error.
```

you do not gather the new site version. To solve the problem, complete the following steps:

1. Perform the steps needed to set up a proxy connection on the server, as described in [Setting a proxy connection on the server \(on page 427\)](#), and be sure to add the following values in the exception list: localhost, 127.0.0.1, <server_IP>, <server_hostname>.
2. Check that the environment variable http_proxy is not configured. If it is, remove it and restart your operating system.

Chapter 16. Running backup and restore

You can schedule periodic backups (typically nightly) of the BigFix server and database files, to reduce the risk of losing productivity or data when a problem occurs by restoring the latest backup.

Consider, however, that when you run a disaster recovery, you restore a backup of an earlier working state of BigFix on the server computer or another computer. Depending on how old the backup is you can lose the latest changes or data.



Important:

After restoring the data from the last backup, the BigFix server might restart at an earlier state with a disalignment between its mailbox and that of each relay. In this case the BigFix server needs to resynchronize with the relays that have continued to process requests, otherwise the relays might ignore the requests of the server. To realign the mailboxes, send some actions to the clients until the mailbox versions are the same.

Moreover, in a Windows environment, any configuration involving registry keys is neither saved nor restored. To recover these values, you must restore them after the recovery procedure successfully completes by running the appropriate configuration processes. For example, email server settings must be set up again on recovered Web Reports. Furthermore, clients are registered as new computers.

You can also restore a single BigFix DSA server when an unrecoverable failure occurs.



Note: Do not restore the failed DSA server entirely from backup. Due to the complexity of DSA replication we recommend that you install a new server with the same FQDN and follow these procedures: [DSA Recovery on Windows \(on page 454\)](#) and [DSA Recovery on Linux \(on page 463\)](#).

If all DSA servers are lost, follow the BigFix server restore procedure, [Server Recovery Procedure on Windows \(on page 451\)](#) and [Server Recovery Procedure on Linux \(on page 459\)](#).

On Windows systems

If you back up the database and the BigFix Server files, when needed you can restore the BigFix environment on a Windows computer.

Server Backup

Using SQL Server Enterprise Manager, establish a maintenance plan for nightly backups for the BFEnterprise and BESReporting databases. Multiple backup copies allow for greater recovery flexibility.

1. Consider backing up to a remote system to allow for higher fault tolerance.
2. Back up the following files and folders used by the BigFix Server:
 - [BigFix Server folder]\BESReportsData\
 - [BigFix Server folder]\BESReportsServer\wwwroot\ReportFiles -- Support files for custom Web Reports.
 - [BigFix Server folder]\Encryption Keys -- Private encryption keys (if using Message Level Encryption).
 - [BigFix Server folder]\Mirror Server\Inbox\ -- Information necessary for BigFix Agents to get actions and Fixlets.
 - [BigFix Server folder]\Mirror Server\Config\DownloadWhitelist.txt. Information necessary for BigFix -- White List for Dynamic Download.
 - [BigFix Server folder]\UploadManagerData.
 - [BigFix Server folder]\wwwrootbes -- Various information necessary about actions, Fixlets, uploads and downloads .

where [BigFix Server folder] is the BigFix Server installation path, by default **C:\Program Files (x86)\BigFix Enterprise\BES Server**.

3. Securely back up site credentials, license certificates, and publisher credentials, and the masthead file.

The `license.pvk` and `license.crt` files are critical to the security and operation of BigFix. If the private key (pvk) files are lost, they cannot be recovered.

The masthead file is an important file that must be used for recovery. It contains the information about the BigFix server configuration. This file can be exported via the Masthead Management tab of the Administration tool.


4. Decrypt and save the encrypted configuration keys. The encrypted keys are located, by default, in the `[BigFix Server folder]` folder. Depending on the version of the BigFix Server, the keys to back up are:

- The EncryptedServerSigningKey and EncryptedClientCAKey keys, if the version of the BigFix Server is 8.2 or later and earlier than 9.5 Patch 3.
- The EncryptedServerSigningKey, EncryptedClientCAKey, EncryptedAPIServerKey, EncryptedPlatKey, and EncryptedWebUICAKKey if the version of the BigFix Server is 9.5 Patch 3 or later.

Use the `ServerKeyTool.exe` tool and run the steps documented in [this page](#) to decrypt the keys.

All the existing encrypted keys stored in the input folder are backed up at once, and the files containing the decrypted keys are stored in the specified destination folder with the filename prefix `Decrypted*`.

5. Use SQL Server Management Studio to connect to the BFEEnterprise database and examine the DBINFO and REPLICATION_SERVERS tables:

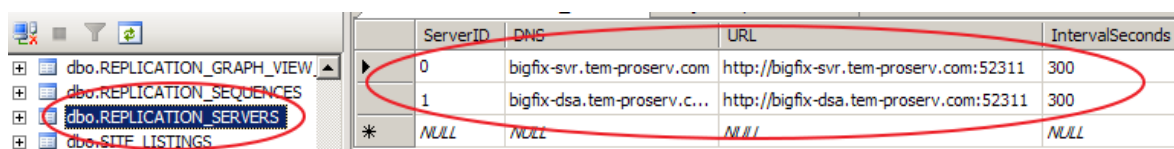

ServerID	DNS	URL	IntervalSeconds
0	bigfix-svr.tem-proserv.com	http://bigfix-svr.tem-proserv.com:52311	300
1	bigfix-dsa.tem-proserv.c...	http://bigfix-dsa.tem-proserv.com:52311	300
*	NULL	NULL	NULL

Record all column values for verification purposes.

If DNS aliases are being leveraged for the servers, this should not change. If is using hostnames, and the hostnames are changing, these column values may need manual modification after the restore; if you want to update the CN on the BigFix internal certificates, see [How to change the Common Name \(CN\) on BigFix internal certificates](#).



Note: Any configuration involving registry keys is neither saved nor restored.

To recover these values, you must restore them after the recovery procedure successfully completes by running the appropriate configuration processes. For example, email server settings must be set up again on recovered Web Reports. Furthermore, clients are registered as new computers.

Server Recovery

Procedure for the server recovery.

1. When running the recovery procedure on the same computer on which the installation or the upgrade failed, the previous BigFix installation must be completely removed using the `BESRemove.exe` utility.
2. Using either the previous BigFix Server computer or a new computer, install SQL server (use the same version of SQL server as was previously used). Remember to enable Mixed Mode Authentication for your new SQL installation if you were using it on the primary BigFix server.
3. Ensure that the new BigFix server computer can be reached on the network using the same URL that is in the [masthead file](#). (For example: `http://192.168.10.32:52311/cgi-bin/bfgather.exe/actionsite` OR `http://bigfixserver.company.com:52311/cgi-bin/bfgather.exe/actionsite`).



Note: To avoid issues when the BigFix clients connect to the BigFix server before it is fully restored, ensure that the BigFix server is not available on the network until the recovery is complete.

4. Restore the BFEnterprise and BESReporting databases from backup.
5. Restore the backed up files and folders creating the directory structure.
6. Use the `ServerKeyTool.exe` tool and run the steps documented in [this page](#) to encrypt the decrypted configuration keys. The decrypted keys are stored in files with filename prefix *Decrypted**.

All the decrypted keys are encrypted at once, and the files containing the encrypted configuration keys are stored in the specified destination folder, by default **C:**

`\Program Files (x86)\BigFix Enterprise\BES Server\`, with the filename prefix Encrypted*.

7. To install the BigFix server components use the "Installer Generator" executable. Go to the [BigFix Enterprise Suite Download Center Platform Release Information](#) page and select the same patch level of the original installation, then download the "Installer Generator" executable. Install the BigFix server components through the "Installer Generator" using the masthead file and specifying the same path used in the original installation option.

- If migrating the Primary/Master server, on the Select Database Replication page of the server installer, select "Single or Master Database", and proceed through the installer screens as usual.
- If migrating the Secondary/Replica server, on the Select Database Replication page of the server installer, select "Replicated Database", and proceed through the installer screens as usual.



Note: A pop-up message, showing the text "The user name *MyUserName* already exists in the database" having used the same BigFix Admin user that is defined in the backed up data, is normal and can be ignored.

8. Reinstall the UAImporter, BES Server Plugin Service, and any plugins or components that are currently installed on the original BigFix server by re-deploying the appropriate Fixlets.



Note: If you have HTTPS enabled, ensure that you restore the server settings for Web Reports.



Note: Any configuration involving registry keys is neither saved nor restored. To recover these values, you must restore them after the recovery procedure successfully completes by running the appropriate configuration processes. For example, email server settings must be set up again on recovered Web Reports. Furthermore, clients are registered as new computers.

Verifying restore results

To ensure that your BigFix Server has been restored, perform the following steps:

1. Verify that all services are started. On Windows platforms, you can use the BigFix Diagnostics tool.
2. Log in to the BigFix console and verify that the login works and that the database information was restored. In case of a login failure, see [Error "Bad sequence parameter" when opening the BigFix Console](#).
3. Use SQL Server Management Studio to connect to the BFEnterprise database and examine the DBINFO and REPLICATION_SERVERS tables. Compare the current values to the values noted running the Server Backup procedure.
4. Verify that the new BigFix Server is able to connect to the database. Check all the Server logs for error messages on connecting to the database.

Depending on your database authentication method (Windows versus SQL), it may be necessary to modify the domain/service accounts leveraged by the BigFix Server services (Root Server, GatherDB, FillDB, and Web Reports) to match the account previously leveraged with the old BigFix Server.

5. Reconfigure any appropriate BigFix Server settings.
6. If leveraging a DNS name/alias within the masthead, perform a DNS switch for the DNS name so that the alias now points to the new BigFix Server. Wait for the DNS switch to propagate (this may take some time depending on your DNS services/infrastructure).
7. Ensure that the BigFix clients and BigFix relays connect to the server when it is available and report data to it. Full recovery with all agents reporting might take from a few minutes to many hours (depending on the size of the deployment and how long the server was unavailable). At least some agents should be reporting updated information within an hour.
8. After verifying that some agents are reporting to the server, send a blank action: **Tools > Take Custom Action** to all computers. The blank action does not make any changes to the agent computers, but the agents report that they received the blank action.
9. After restoring the data from the last backup, the BigFix server might restart at an earlier state with a disalignment between its mailbox and that of each relay. In this

case, the BigFix server needs to resynchronize with the relays that have continued to process requests, otherwise the relays might ignore the requests of the server. To realign the mailboxes, see [How to realign mailboxes after restoring a BigFix database backup](#).

10. Log in to the web reports and ensure that the data was restored.



Note: If a remote datasource is defined in the Web Reports configuration, Web Reports connects to the datasource only after you re-enter the datasource credentials in the Web Reports **Administration > Datasource Settings > Edit** page.

DSA Recovery

When recovering a lost DSA server, all top-level BigFix relays (and therefore the entire deployment) should already be pointing to the remaining DSA server.

It is recommended to leave all relays and clients reporting up to the working DSA server during this recovery procedure. If your existing relay settings do not allow this, isolate the server being restored on the network such that only the working DSA server can connect to it.

1. If the master DSA server fails, run the following procedure on the **BFEnterprise** SQL database to promote the secondary DSA server to master during restoration and replication of the failed server.

```
declare @ServerID varchar(32)
select @ServerID = convert(varchar(32),ServerID) from DBINFO
execute [BFEnterprise].[dbo].[update_adminfields]
'Z:masterDatabaseServerID',@ServerID
```

In this way you can install a new DSA server and you can run the Administration Tool on the secondary DSA server during the restoration of the failed server.

2. On the existing DSA server delete the failed DSA server id from the database.

- a. First see what the existing DSA server id is by executing the following SQL statement.

```
select ServerID from DBINFO
```

- b. List the IDs of the DSA servers:

```
select * from REPLICATION_SERVERS
```

- c. After identifying the failed server ID, run the following procedure:

```
execute BFEnterprise.dbo.delete_replication_server <ID>
```

3. Restore the server operating system and database software in a pristine state without any BigFix server or the BigFix database remnants.

4. Restore the following items from backup:

- [BigFix Server folder]\BESReportsServer\wwwroot\ReportFiles
- [BigFix Server folder]\Encryption Keys (can be optionally restored by copying from the secondary server, or a new key generated by the Administration Tool)
- [BigFix Server folder]\UploadManagerData (optional, for faster recovery of SUA data if lost server was the SUA Source)
- [BigFix Server folder]\wwwrootbes\bfmirror\downloads\ActionURLs
- [BigFix Server folder]\wwwrootbes\bfmirror\downloads\sha1 (optional, for faster recovery of cached files)
- cert.pem file for Web Reports, if using HTTPS
- BESReporting database in SQL Server

5. Install BigFix server using the installer and the existing masthead. For additional information see [Installing Additional Windows Servers \(DSA\) \(on page 149\)](#).

6. Set the following registry values:

For 32-bit Windows systems, go to [HKLM\Software\BigFix\Enterprise Server\FillDB] or for 64-bit Windows systems, go to [HKLM\Software\Wow6432Node\BigFix\Enterprise Server\FillDB] and then set the following values:

```
"PerformanceDataPath"[REG_SZ] = "[BigFix Server  
folder]\FillDB\FillDBperf.log"  
"UnInterruptibleReplicationSeconds"[DWORD] = 14400 (decimal)
```



```
ReplicationDatabase=<DBName>
ReplicationUser=<DBUser>
ReplicationPassword=<DBPassword>
```

7. Restart the BES FillDB service.
8. Install BigFix client and console.
9. After replication completes, run the following procedure on in the SQL database to promote this newly restored BigFix server to be the master server.

```
declare @ServerID varchar(32)
select @ServerID = convert(varchar(32),ServerID) from DBINFO
execute [BFEnterprise].[dbo].[update_adminfields]
'Z:masterDatabaseServerID',@ServerID
```

10. Reinstall and reconfigure the Plugins. Configuration information can be gathered from the currently operating DSA server or from installation notes and configuration details kept by the Administrator.
11. Set the following registry values and restart the BES FillDB service:

Go to [HKLM\Software\Wow6432Node\BigFix\Enterprise Server\FillDB] and then set the following values:

```
"PerformanceDataPath"[REG_SZ] = ""
"UnInterruptibleReplicationSeconds"[DWORD] = 120 (decimal)
```

12. Launch the Administration Tool and update the replication interval on this restored server to the desired level. Typically, this value should match the interval set on the other DSA Server.



Note: Depending on the size of the deployment, the replication process might take multiple days to complete. To validate its completion, look for a `Replication Completed` message in the `FillDBperf.log` file. Connecting a separate BigFix console to each DSA server and comparing contents is another way to check that the data is synchronized in both deployments.

13. Revalidate the datasource on the Web Reports, editing the existing one.



Note: When you switch the servers, you have to wait for the endpoints to register with the new master server before you can send mailbox actions to them. Endpoints register automatically and periodically to a server by default every 6 hours. In the meantime, if you need to run any actions, this can be accomplished by running them as Dynamically target by property.

On Linux systems

If you back up the database and the BigFix Server files, when needed you can restore the BigFix environment on a Linux computer.

Server Backup

How to back up the BigFix Server.

Perform the following steps:

1. Stop all the BigFix processes, including running plug-ins if any, using the following commands:

```
/etc/init.d/beswebui stop
/etc/init.d/besclient stop
/etc/init.d/beswebreports stop
/etc/init.d/besgatherdb stop
/etc/init.d/besfilldb stop
/etc/init.d/besserver stop
```

2. Back up the BFENT and BESREPOR databases using the following commands:

```
su - db2inst1
db2 backup db BFENT
db2 backup db BESREPOR
```

Optionally add an absolute path with the commands:

```

su - db2inst1
db2 backup db BFENT to /Absolute/Path/Of/ExistingFolder
db2 backup db BESREP0R to /Absolute/Path/Of/ExistingFolder

```

These databases might have different names if, at installation time, one of these commands has been used: `-opt BES_DB_NAME=<SERVER_DB_NAME>` or `-opt WR_DB_NAME=<WEBREPORTS_DB_NAME>`.

3. Manually back up the following folders:

```

/var/opt/BESClient
/var/opt/BESCommon
/var/opt/BESServer
/var/opt/BESWebReportsServer
/var/opt/BESWebUI


```

4. Back up site credentials, license certificates and masthead files.

The `license.pvk` and `license.crt` files are critical to the security and operation of BigFix. If the private key (pvk) files are lost, they cannot be recovered.

The masthead file is an important file that must be used for recovery. It contains the information about the BigFix server configuration. To back it up, either copy the `/etc/opt/BESServer/actionsite.afxm` file renaming it `masthead.afxm`, or open the masthead file from a browser, `http://hostname:52311/masthead/masthead.afxm`, and then save it locally.

5. Use the DB client to connect to the BFENT database and examine the DBINFO and REPLICATION_SERVERS tables:

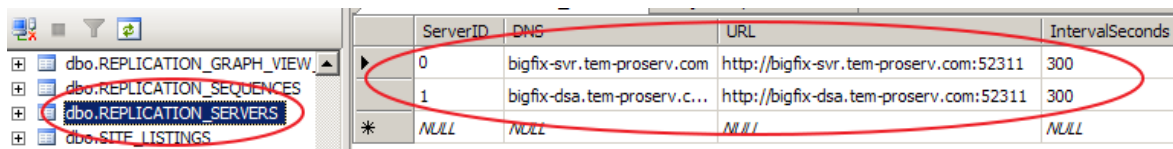

ServerID	DNS	URL	IntervalSeconds
0	bigfix-svr.tem-proserv.com	http://bigfix-svr.tem-proserv.com:52311	300
1	bigfix-dsa.tem-proserv.c...	http://bigfix-dsa.tem-proserv.com:52311	300
*	NULL	NULL	NULL

Record all column values for verification purposes.

If DNS aliases are being leveraged for the servers, this should not change. If is using hostnames, and the hostnames are changing, these column values may need

manual modification after the restore; if you want to update the CN on the BigFix internal certificates, see [How to change the Common Name \(CN\) on BigFix internal certificates](#).

Server Recovery

How to perform a server recovery.

1. Ensure that the new BigFix server computer can be reached on the network using the same URL that is in the masthead file. (For example: `http://192.168.10.32:52311/cgi-bin/bfgather.exe/actionsite` OR `http://bigfixserver.company.com:52311/cgi-bin/bfgather.exe/actionsite`).



Note: To avoid issues when the BigFix clients connect to the BigFix server before it is fully restored, ensure that the BigFix server is not available on the network until the recovery is complete.

2. Remove all the installed BigFix components, including any plug-in. For more information about removing the BigFix components on Linux, see [Removing the Product Components on Linux systems \(on page 221\)](#).
3. Remove the following BigFix files and folders:

```
/etc/opt/BES*
/opt/BES*
/tmp/BES
/var/log/BES*
/var/opt/BES*
```

Where "BES*" is a prefix followed by the name of a BigFix component, for example "BESClient".

4. Restore the previously saved BFENT and BESREP0R as follows:

```
su - db2inst1
db2 restore db BFENT
db2 restore db BESREP0R
```

If saved with an absolute path, use the following command:

```
su - db2inst1
db2 restore db BFENT from /Absolute/Path/Of/Backup/Folder
db2 restore db BESREPOR from /Absolute/Path/Of/Backup/Folder
```

5. Restore only the previously saved folders and files:

```
/var/opt/BESClient
/var/opt/BESCommon
/var/opt/BESServer
/var/opt/BESWebReportsServer
/var/opt/BESWebUI
```

6. Remove the old password files:

```
/var/opt/BESClient/besclient.obf
/var/opt/BESServer/besserver.obf
/var/opt/BESWebReportsServer/beswebreports.obf
```

7. Copy the old configuration files in a temporary directory, as they might contain custom settings that you use, then delete them:

```
/var/opt/BESClient/besclient.config
/var/opt/BESServer/besserver.config
/var/opt/BESWebReportsServer/beswebreports.config
/var/opt/BESWebUI/beswebuiservice.config
```

8. If you have installed WebUI, remove the **cert** folder that contains the WebUI certificates:

```
/var/opt/BESWebUI/cert
```

9. Download the same BigFix version and run the installation with option **-reuseDb**:

```
./install.sh -reuseDb
```

Install the BigFix server components using the masthead file and specifying the same path used in the original installation option.

- If migrating the Primary/Master server, on the Select Database Replication page of the server installer, select “Single or Master Database”, and proceed through the installer screens as usual.
 - If migrating the Secondary/Replica server, on the Select Database Replication page of the server installer, select “Replicated Database”, and proceed through the installer screens as usual.
10. Manually add again the custom settings that you use by copying them from the old configuration files backed up in step 7 to the new configuration files:

```
/var/opt/BESClient/besclient.config
/var/opt/BESServer/besserver.config
/var/opt/BESWebReportsServer/beswebreports.config
/var/opt/BESWebUI/beswebuiservice.config
```

created by the installation at Step 9.

11. Reinstall the UAImporter, BES Server Plugin Service, and any plugins or components that are currently installed on the original BigFix server by re-deploying the appropriate Fixlets.

Verifying restore results

Ensure that your BigFix Server has been restored.

Perform the following steps:

1. Verify that all services are started.
2. Log in to the BigFix console and verify that the login works and that the database information was restored. In case of a login failure, see [Error "Bad sequence parameter" when opening the BigFix Console](#).
3. Use the DB client to connect to BFENT and examine the DBINFO and REPLICATION_SERVERS tables. Compare the current values to the values noted running the Server Backup procedure.
4. Verify that the new BigFix Server is able to connect to the database. Check all the Server logs for error messages on connecting to the database.
5. Reconfigure any appropriate BigFix Server settings.

6. If leveraging a DNS name/alias within the masthead, perform a DNS switch for the DNS name so that the alias now points to the new BigFix Server. Wait for the DNS switch to propagate (this may take some time depending on your DNS services/infrastructure).
7. Ensure that the BigFix clients and BigFix relays connect to the server when it is available and report data to it. Full recovery with all agents reporting might take from a few minutes to many hours (depending on the size of the deployment and how long the server was unavailable). At least some agents should be reporting updated information within an hour.
8. After verifying that some agents are reporting to the server, send a blank action: **Tools > Take Custom Action** to all computers. The blank action does not make any changes to the agent computers, but the agents report that they received the blank action.
9. After restoring the data from the last backup, the BigFix server might restart at an earlier state with a disalignment between its mailbox and that of each relay. In this case, the BigFix server needs to resynchronize with the relays that have continued to process requests, otherwise the relays might ignore the requests of the server. To realign the mailboxes, see [How to realign mailboxes after restoring a BigFix database backup](#).
10. Log in to the web reports and ensure that the data was restored.



Note: If a remote datasource is defined in the Web Reports configuration, Web Reports connects to the datasource only after you re-enter the datasource credentials in the Web Reports **Administration > Datasource Settings > Edit** page.

Enabling the DB2 database online backup

Starting from BigFix V 9.5 Patch 3 you can customize your Linux environment to run the online backup of the **BFENT** and **BESREPOR** DB2 databases.

The advantage of running a DB2 online backup is that the backup can run while the applications and the services are accessing the database so there is no outage time

window. You can either schedule the online backup or run it from the DB2 command line on the DB2 server.

As a prerequisite for running the DB2 online backup, you must ensure that the [DB2 archive logging](#) is active on the DB2 server.

From the BigFix point of view, these are the possible scenarios that you might run into:

You ran a fresh install of BigFix V9.5 Patch 3

In this case the BigFix databases are already enabled to use the DB2 database online backup. You only need to enable the [DB2 archive logging](#) for the BigFix databases on the DB2 server.

You upgraded BigFix from an earlier version to V9.5 Patch 3

If so, you must enable the BigFix databases to use the DB2 database online backup function as indicated in <https://bigfix-mark.github.io/>.

DSA Recovery

When recovering a lost DSA server, all top-level BigFix relays (and therefore the entire deployment) should already be pointing to the remaining DSA server.

It is recommended to leave all relays and clients reporting up to the working DSA server during this recovery procedure. If your existing relay settings do not allow this, isolate the server being restored on the network such that only the working DSA server can connect to it.

1. If the master DSA server fails, run the following procedure on the **BFEnterprise** database to promote the secondary DSA server to master during restoration and replication of the failed server.

```
db2
  set schema dbo
  select serverid from DBINFO (take count of SERVERID)
  set current function path dbo
```



```
call update_adminFields('Z:masterDatabaseServerID','<serverid>') -
Replace
SERVERID with the value from the previous query
```

In this way, you can install a new DSA server and you can run the Administration Tool on the secondary DSA server during the restoration of the failed server.

2. On the existing DSA server, delete the failed DSA server id from the database:
 - a. List the IDs of the DSA servers:

```
select * from REPLICATION_SERVERS
```

- b. After identifying the failed server ID, run the following procedure:

```
call dbo.delete_replication_server(ID)
```

3. Restore the server operating system and database software in a pristine state without any BigFix server or the BigFix database remnants.
4. If you followed the server backup procedure described at:

[Server Backup \(on page 457\)](#)

Follow the server recovery procedure, starting from Step 3, described at:

[Server Recovery \(on page 459\)](#)

5. Stop the BigFix FillDB process, set the following keywords in the `besserver.config` file and restart the FillDB process.

```
PerformanceDataPath = <Performance_Data_Path_filename>
UnInterruptibleReplicationSeconds = 14400
ReplicationDatabase=<DBName>
ReplicationUser=<DBUser>
ReplicationPassword=<DBPassword>
```

where `<Performance_Data_Path_filename>` might be `/var/opt/BEServer/FillDBData/FillDBPerf.log`.

6. After replication completes, run the following procedure in the database to promote this newly restored BigFix server to be the master server.

```
db2
  set schema dbo
  select serverid from DBINFO (take count of SERVERID)
  set current function path dbo
  call update_adminFields('Z:masterDatabaseServerID','<serverid>') -
  Replace
  SERVERID with the value from the previous query
```

7. Reinstall and reconfigure the plug-ins. Configuration information can be gathered from the currently operating DSA server or from installation notes and configuration details kept by the Administrator.
8. Set the following keywords in the `besserver.config` file and restart the BES FillDB service:

```
PerformanceDataPath = ""
UnInterruptibleReplicationSeconds = 120
```

9. Launch the Administration Tool and update the replication interval on this restored server to the desired level. Typically, this value should match the interval set on the other DSA server.



Note: Depending on the size of the deployment, the replication process might take multiple days to complete. To validate its completion, look for a `Replication Completed` message in the `FillDBperf.log` file. Connecting a separate BigFix console to each DSA server and comparing contents is another way to check that the data is synchronized in both deployments.

10. Revalidate the datasource on the Web Reports, editing the existing one.



Note: When you switch the servers, you have to wait for the endpoints to register with the new master server before you can send mailbox actions to them. Endpoints register automatically and periodically to a server by default every 6 hours. In the meantime, if you need to run any actions, this can be accomplished by running them as Dynamically target by property.

Chapter 17. Upgrading on Windows systems



Important:

- You must upgrade the BigFix Server manually when upgrading from V9.5.4 or earlier.
- If you are using MS SQL Always On Availability Group, you must temporarily disable the feature.

The following BigFix capabilities are supported only if all the BigFix components (server, relays, agents) are upgraded to V9.5:

- Collecting data from the BigFix agents deployed in several different code pages and languages.
- Encoding the data in UTF8 format.
- Reporting data back to the BigFix server.

Before upgrading BigFix to V9.5 ensure its version is 9.2.3 or later.

You must upgrade the BigFix components to V9.5 in this order:

1. The BigFix servers and consoles. These components must match their versions and must be upgraded at the same time (consoles with a version earlier than or later than the server version are not allowed to connect to the server and database).
2. The BigFix relays
3. The BigFix agents.

During the upgrade, the versions of the different components must respect this rule: `server version >= relay version >= client version`

As a best practice, follow the instructions provided in [Running backup and restore \(on page 448\)](#) to make a recovery copy of your BigFix Server environment and to ensure that, if needed, you can run the [rollback \(on page 478\)](#).

For upgrading a DSA environment, or an environment having remote database, or remote components, see [Manual upgrade \(on page 473\)](#).

**Warning:**

1. The WebUI services installed by versions of the BigFix Platform earlier than V9.5.3 do not work on V9.5.3 and later. To upgrade to V9.5.3 or later from an earlier version you must install again the WebUI with the WebUI specific installation Fixlet `"Install BigFix WebUI Service (Version 9.5.X)"`. After installation, your pre-V9.5.3 data becomes available when the first ETL process completes.
2. You can roll back to a previous version of BigFix only if you did not enable the enhanced security option. After you enable it in your environment, you cannot roll back to a previous version of BigFix even if you disable it.



Note: If the WebUI is deployed, it should be upgraded at the same time as the BES Server. See [WebUI Installation](#).

BigFix client backward compatibility

To correctly display reports of clients deployed with different code pages and languages you must have ALL the components (server, relays, clients) at version 9.5.

Before upgrading the BigFix server to V9.5, ensure that it is at V9.2.3 or later. Complete the upgrade in the following order:

1. The server
2. The relays. If relays are configured in a hierarchy, upgrade the top-level relays before the lower-level relays.
3. The clients

If you have a BigFix client with an earlier version than V9.5, consider the following:

- You might encounter issues when upgrading a client that has settings whose name or value contain non-ASCII characters. If custom settings with these values exist, check that they have not been altered after upgrading to V9.5.
- BigFix clients V9.2.6 or later are supported without any additional configuration.
- Immediately after receiving the updated masthead, restart the `BESClient` process on BigFix clients V9.2.0 through V9.2.5 to activate the new masthead parameters. Use the tasks available under BES Support to restart the clients. To find these tasks, filter for "Troubleshooting: Restart BES client" from the Fixlets and Tasks list on the BigFix Console.
- BigFix clients V9.1 must have the same code page settings as the BigFix server in the `_BESClient_DeploymentEncoding_IANAName` setting.
- BigFix clients and relays versions earlier than 9.1 are not supported.
- After upgrading BigFix to V9.5, the `filldb` process on clients might fail if the `filldb` buffer directory contains reports that use an unexpected report encoding value, for example `ReportEncoding: hp-roman8`. If so, clean up the `filldb` buffer directory containing the reports and then restart `filldb`.

Upgrade paths to V9.5

The following tables describe the upgrade paths to BigFix V9.5:

• Server upgrade

Table 11. Server Upgrade

Upgrade from	Windows Upgrade
7.x	No
8.x	No
9.0	No
9.1	No
9.2	Yes

Upgrade from	Windows Upgrade
	 Note: The BigFix server must be at V9.2.3 or later before you can upgrade it to V9.5

- Client upgrade

Table 12. Client Upgrade

Upgrade from	Windows Upgrade	UNIX Upgrade	Mac Upgrade
9.0	Yes	Yes	Yes
9.1	Yes	Yes	Yes
9.2	Yes	Yes	Yes

Before upgrading

Perform these steps before upgrading the BigFix components:

1. Ensure that the BigFix WebUI service is stopped before starting to upgrade the BigFix components, and do not start it again until the overall upgrade procedure completes successfully. This step applies any time, regardless of whether the WebUI is installed on the same system as the BigFix Server or on a different system.
2. Close all BigFix consoles.
3. Back up your BigFix server and database as described in [Server Backup \(on page 449\)](#).
4. Back up your `license.pvk`, `license.crt`, and `masthead.afxm` to a separate location on the BigFix server or to a USB key.
5. Ensure that you have enough free space for the BigFix database. The free space projection involves a number of factors: the row counts of specific tables, the density of the data pages storing the tables and indexes, and specific database options for

log management and table compression. The basic rule of thumb for the 9.5 upgrade is to ensure that you can accommodate a 100% growth in the size of the database (twice its current size) if upgrading from V9.2. The additional space is required to manage the growth of tables for UTF-8 transcoding, including the allocation of temporary space for the movement of data within the BigFix databases. You can determine the database size through the Microsoft SQL Server Management Studio.

6. Upgrade SQL Databases.
7. Increase the replication interval to prevent the replication from failing repeatedly during the upgrade. For additional information, see the Configuration Guide..
8. Upgrade the BigFix components in the following order:
 - a. The console and the server must have the same version and must be upgraded at the same time.
 - b. Relays
 - c. Clients

Servers, relays, and clients do not need to match versions and the upgrade of these components can occur at different times. Clients with earlier versions can continue to report to later versions of relays or servers, but might not have all the functionality of the later releases.



Note:

Existing BigFix proxy configurations defined on the server are automatically migrated to the V9.5 proxy configuration settings and behavior. For more information about BigFix V9.5 proxy configuration settings, see [Setting up a proxy connection \(on page 420\)](#).

If the existing proxy configuration exploits the `BESGather_Service`, during the migration you are prompted to enter the password of the user that you specified for the `BESGather_Service`. The migration process uses that password to access the Internet Explorer and to map the proxy configuration settings into the set of registry keys used in V9.5 and documented in [Table 8: Proxy configuration settings for server and relays \(on page 433\)](#).

9. In a Distributed Server Architecture (DSA) environment, run the BigFix server upgrade on the primary server first, then upgrade the secondary servers.
10. After the upgrade, run the BigFix Administration Tool to do the following tasks:
 - Update the data with SHA-2 signature.
 - Update a remote database.
 - Set the NIST security standards, if needed.

**Note:**

- For large deployments, the server upgrade might take several minutes.
- After upgrading, you might experience a slower deployment. The upgrade downtime might create a backlog of client reports and it might take several hours for the BigFix server to process this backlog after the upgrade has been completed.
- Check your password characters. After the upgrade, passwords containing non-ASCII characters are corrupted and users cannot log in anymore. In this case, before using the product, you must reset this type of password to either the same password or a new password without non-ASCII characters.

Upgrade prerequisite checks

The following prerequisite checks are automatically run by the upgrade procedure on the BigFix Server.

If any of these checks fails, the upgrade does not start and the procedure exits with an error message. You can rerun the upgrade after you ensure that the condition that failed is satisfied. The upgrade procedure checks that:

- The size of the Upload Manager Buffer Directory and the number of files that it contains do not exceed the 90% of the values that are specified in the following settings:

```
_BESRelay_UploadManager_BufferDirectoryMaxSize
_BESRelay_UploadManager_BufferDirectoryMaxCount
```

If the check fails: Fix the issue by running the following Fixlets available in the BES Support site, and then rerun the upgrade:

```
2695: WARNING: Upload Manager Directory exceeds file max number - BES
      Server
2696: WARNING: Upload Manager Directory Full - BES Server
```

- The site names listed in the following columns of the database contain only ASCII characters:

```
LOCAL_OBJECT_DEFS.Name
LOCAL_OBJECT_DEFS.Sitename
```

If the check fails: Rename the site names and fix the content referencing them.

- The size of the data related to custom content and the actions that are contained in the `ACTION_DEFS.Fields` and `LOCAL_OBJECT_DEFS.Fields` fields does not exceed the maximum size allowed in the new database schema.

If the check fails: Shorten the exceeding data length.

- The data contained in each of the following fields does not exceed the maximum index length:

```
DASHBOARDDATA.NAME
UNMANAGEDASSET_FIELDS_TYPES.FIELDNAME
WEBUI_DATA.NAME
```

If the check fails: Shorten the data contained in the fields as required.

Run these steps, if you are in a DSA environment and any of the prerequisite checks fails on the primary server, which is the first server that is upgraded:

1. Run the needed corrective actions on the primary server.
2. Wait for a full replica on the secondary servers to ensure that the same corrective actions are applied to their databases as well.
3. After the full replica completes, rerun the upgrade on the primary server and then on the secondary servers.

Automatic upgrade

You can proceed with an automatic upgrade using the "BigFix - Updated Platform Server Components version x.x.x Now Available!" Fixlet.



Note: For environments with a remote server or DSA, see [Manual upgrade \(on page 473\)](#).

Manual upgrade

Use the manual upgrade instead of the Fixlet upgrade when you upgrade a DSA multiple server environment or a BigFix server which uses a remote database, or a BigFix environment having remote WebUI or remote Web Reports server.



Note: During the upgrade of a DSA server, ensure that no services are running on all the other DSA servers to prevent the upgrading system from becoming unstable when a replication process starts against it.

In order to perform a manual upgrade, see the following sections in the order in which they are listed below.

Upgrading the installation generator

1. Download and run the new BigFix Server installer from <http://support.bigfix.com/bes/install/downloadbes.html>
2. Click **Yes** when you are prompted to upgrade and follow the installer instructions.

Upgrading the server

1. Copy the BigFix Server installation folder to the BigFix Server computer. The default location of the BigFix Server installation folder is `%PROGRAM FILES%\BigFix Enterprise\BES Installers\Server`.



Note: If you have a remote database, prior to upgrading see [Upgrading a BigFix server with a remote database \(on page 475\)](#).

2. Run the BigFix Server installer (`setup.exe`) on the BigFix Server computer.



Note: Before starting to upgrade, the upgrade procedure runs a set of prerequisite checks. If any of them fails, you can do the required corrective actions and then rerun the upgrade procedure. For more information, see [Upgrade prerequisite checks \(on page 471\)](#).

3. Follow the installer instructions to upgrade.
4. Run the Administration Tool `BESAdmin.exe` to distribute the updated license.



Note:

1. Before upgrading, it is advisable to delete or rename the `server_audit.log` file to avoid inaccurate interpretation of file encoding.
2. After upgrading the server to Version 9.5.5 the WebUI must select and get new data due to data movement in the database. This might temporarily prevent the FillDB process from processing the client reports.

Upgrading a BigFix server with a remote database

The upgrade Fixlet in the Support site does not upgrade a remote server correctly. Run the full BigFix server installer to perform the upgrade.

Remote database setups might encounter problems during upgrade and require resetting database connection settings after manually running the BigFix Server installer. Because the upgrade Fixlet in the Support site does not upgrade a Server correctly, you must run the full Server installer to perform the upgrade. The upgrade process might reset remote database configurations on the server; the troubleshooting steps can help you find any configurations that are incorrect after the upgrade.

Pre-upgrade checklist:

1. Back up your database.
2. Check if your authentication method is SQL or NT.

NT Authentication

Take note of the NT Domain account used for BigFix Server Services.

SQL Authentication

Take note of the SQL account used for SQL Authentication Registry values.

3. Take a screenshot of ODBC connections; bes_bfenterprise, bes_EnterpriseServer, enterprise_setup, and LocalBESReportingServer.
4. Verify the DB Owner or SA rights for this account. It is critical that an NT user performing the upgrade, that is the user that will run setup.exe, has the appropriate database permissions.

Upgrade procedure:

1. Upgrade the Server Installers using the Support Fixlets.
2. Run the Server installer as a user that has DB Owner permissions to the database server. The installer recognizes that the Server is at an earlier version and asks if you want to upgrade to the latest version.

Troubleshooting steps:

If the installation does not complete successfully, run the following steps:

1. Check the system DSN for bes_bfenterprise. It should point to the database server and set to use the BFEnterprise database as the default database. Double check if it is set to use NT or SQL Authentication correctly. The FillDB and GatherDB services fail to connect to the database if this DSN is not configured correctly.
2. Check the system DSN for LocalBESReportingServer. It should point to the remote database server and set to use the BESReporting database as the default database. Check if the system DSN is set to use NT or SQL Authentication correctly. You will receive an error message prior to the Web Reports login request if this is not configured correctly.
3. If you are using NT Authentication, check that the FillDB, GatherDB and Web Reports services are configured to run as your service account with permission to the database.
4. If you are using SQL Authentication, check that the username and password registry keys are set correctly.
5. If your console gives an error message that the database has the wrong version, you might need to run the database upgrade scripts manually to upgrade the database. Run the BigFix Administrator Tool (BESAdmin.exe) to update the remote database tables; you will be prompted for the **site admin** password.



Note: The besadmin.exe should be run automatically, if your account has the DB Owner or SA privileges to the remote database.

The BigFix server is now correctly upgraded.

Upgrading the Console

1. Copy the BigFix Console installation folder to all computers that are running the BigFix Console. The default location for the BigFix Console installation folder is `%PROGRAM FILES%\BigFix Enterprise\BES Installers\Console`.
2. Run the BigFix Console installer (`setup.exe`) on all the computers currently running the BigFix Console.

Upgrading the WebUI



Note: Since the May 2023 WebUI update, Windows Server 2012 R2 is no longer supported by the WebUI component. If you have the WebUI installed on this operating system, you need to move the WebUI on a supported operating system. For more details, refer to the BigFix WebUI documentation.



Note: If the WebUI is deployed, it should be upgraded at the same time as the BES Server. See [WebUI Installation](#).

Upgrading from Version 9.5.7

1. Copy the BigFix WebUI installer (default location is `%PROGRAM FILES%\BigFix Enterprise\BES Installers\WebUI`) to the client computer that is running the BigFix WebUI.
2. Stop the WebUI Service.
3. Run the installer on the computer that is running the WebUI. The installer detects the WebUI and offers to upgrade it for you.
4. Follow the installer instructions to upgrade the BigFix WebUI.
5. Start the WebUI Service.

Upgrading from Version 9.5.5 or 9.5.6

1. First upgrade your BigFix WebUI installation to 9.5 Version Patch 7 level by running from the BigFix Console the Fixlet named: **Updated WebUI Service - BigFix version 9.5.7 Now Available!**
2. Follow the procedure described in **Upgrading from Version 9.5.7**.

Upgrading the relays

To upgrade the BigFix from the BigFix console, apply the **Updated Windows Relay** Fixlet to all relevant relays.

Upgrading the clients

You can upgrade the BigFix Clients by copying the BigFix Client installation folder to each computer that is running the BigFix Client, and then running `setup.exe`.

The default location for the BigFix Client installation folder is `C:\Program Files\BigFix Enterprise\BES Installers\Client`.

Upgrading the Web Reports server

To upgrade a stand-alone Web Reports server on Windows, copy the BigFix Server installation folder to the Web Reports Server computer. The default location of the BigFix Server installation folder is `%PROGRAM FILES%\BigFix Enterprise\BES Installers\Server`. Run the `BigFix-BES-Server` `setup.exe`, which detects the Web Reports installation and offers to upgrade it for you.

If Web Reports is installed on the BigFix server, it is upgraded along with the BigFix server.



Note: If you have a remote database, run the upgrade as a user with DBO permissions to the database.



Note: If the WebUI is deployed, it should be upgraded at the same time as the BES Server. See [WebUI Installation](#).

Rollback

If you made a recovery copy of your BigFix Server data and configuration as described in [Server Backup \(on page 449\)](#), you can roll back your BigFix Server to its original status, before running the upgrade, following the instructions provided in [Server Recovery \(on page 451\)](#).

Chapter 18. Upgrading on Linux systems



Important:

- The Fixlet server upgrade is not available in BigFix V9.5 and V9.5.5; you must upgrade the BigFix server manually.
- You must upgrade the BigFix Server manually when upgrading from V9.5.4 or earlier.

The following BigFix V9.5 capabilities are supported only if all BigFix components (server, relays, agents) are upgraded to V9.5:

- Collecting data from BigFix agents deployed in several different code pages and languages.
- Encode the data in UTF8 format.
- Report it back to the BigFix server.

Before upgrading BigFix to V9.5, ensure its version is 9.2.3 or later.

You must upgrade the BigFix components to V9.5 in this order:

1. The BigFix servers and consoles. These components must match their versions and must be upgraded at the same time (consoles with a version earlier than or later than the server version are not allowed to connect to the server and database).
2. The BigFix relays.
3. The BigFix agents.

During the upgrade, the versions of the different components must respect this rule: `server version >= relay version >= client version`

As a best practice, follow the instructions provided in [Running backup and restore \(on page 448\)](#) to make a recovery copy of your BigFix Server environment and to ensure that, if needed, you can run the [rollback \(on page 493\)](#).

For upgrading a DSA environment see [Manual upgrade \(on page 489\)](#).

**Note:**

For Solaris: Starting from BigFix Platform version 9.5.13, you can install the client by using the IPS package on Solaris 11 computers. On Solaris version 10 or earlier, upgrading by using the IPS package is not supported. If you used the PKG package to install the client on these versions, then upgrading the client in global zone removes it from local zones as well. You have to reinstall the client in local zones.

**Warning:**

1. The WebUI services installed by versions of the BigFix Platform earlier than V9.5.3 do not work on V9.5.3 and later. To upgrade to V9.5.3 or later from an earlier version you must install again the WebUI with the WebUI specific installation Fixlet "Install BigFix WebUI Service (Version 9.5.X)". After installation, your pre-V9.5.3 data becomes available when the first ETL process completes.
2. You can roll back to a previous version of BigFix only if you did not enable the enhanced security option. After you enable it in your environment, you cannot roll back to a previous version of BigFix even if you disable it.



Note: If the WebUI is deployed, it should be upgraded at the same time as the BES Server. See [WebUI Installation](#).

BigFix client backward compatibility

To correctly display reports of clients deployed with different code pages and languages you must have ALL the components (server, relays, clients) at version 9.5.

Before upgrading the BigFix server to V9.5, ensure that it is at V9.2.3 or later. Complete the upgrade in the following order:

1. The server
2. The relays. If relays are configured in a hierarchy, upgrade the top-level relays before the lower-level relays.
3. The clients

If you have a BigFix client with an earlier version than V9.5, consider the following:

- You might encounter issues when upgrading a client that has settings whose name or value contain non-ASCII characters. If custom settings with these values exist, check that they have not been altered after upgrading to V9.5.
- BigFix clients V9.2.6 or later are supported without any additional configuration.
- Immediately after receiving the updated masthead, restart the `BESClient` process on BigFix clients V9.2.0 through V9.2.5 to activate the new masthead parameters. Use the tasks available under BES Support to restart the clients. To find these tasks, filter for "Troubleshooting: Restart BES client" from the Fixlets and Tasks list on the BigFix Console.
- BigFix clients V9.1 must have the same code page settings as the BigFix server in the `_BESClient_DeploymentEncoding_IANAName` setting.
- BigFix clients and relays versions earlier than 9.1 are not supported.
- After upgrading BigFix to V9.5, the `filldb` process on clients might fail if the `filldb` buffer directory contains reports that use an unexpected report encoding value, for example `ReportEncoding: hp-roman8`. If so, clean up the `filldb` buffer directory containing the reports and then restart `filldb`.

Upgrade paths to V9.5

The following tables show the upgrade paths to BigFix V9.5:

- **Server upgrade**

Table 13. Server Upgrade

Upgrade from	Linux Upgrade
9.0	No

Upgrade from	Linux Upgrade
9.1	No
9.2	Yes


Note: The BigFix server must be at V9.2.3 or later before you can upgrade it to V9.5

• Client upgrade

Table 14. Client Upgrade

Upgrade from	Windows Upgrade	UNIX Upgrade	Mac Upgrade
9.0	Yes	Yes	Yes
9.1	Yes	Yes	Yes
9.2	Yes	Yes	Yes

Automatic databases backup upon upgrade

You can configure your BigFix Server to automatically run the backup of the **BFENT** and **BESREPOR** databases before and after running the upgrade process.

To enable this behavior you must assign an existing path, accessible both by **root** and by the database instance owner, by default **db2inst1**, to the advanced option **automaticBackupLocation**, for example:

```
/opt/BESServer/bin/BESAdmin.sh -setadvancedoptions
-sitePvkLocation=<pvkLocation> -sitePvkPassword=<pvkPassword>
-update automaticBackupLocation="/my/path"
```

This behavior applies both when you run the upgrade from the command line and when you run the upgrade by deploying the upgrade Fixlet.

Two backups are generated for each of the **BFENT** and **BESREPOR** databases during this process, one before the upgrade and one after the upgrade, for a total of four backups.

The files containing the backups are stored in the directory that you specified in the `automaticBackupLocation` advanced option.



Note: Ensure that there is enough disk space available on the file system to store the four backup files.

These are sample backup files generated during the upgrade:

```
BFENT.0.db2inst1.DBPART000.20160711142219.001
BESREPOR.0.db2inst1.DBPART000.20160711142240.001

BFENT.0.db2inst1.DBPART000.20160711142306.001
BESREPOR.0.db2inst1.DBPART000.20160711142327.001
```

The fifth digit in the file name is a time stamp. For example, 20160711142219 in the first file means 2016-07-11 at 14:22:19.

In the installation log `BESInstall.log` you can see the time stamp of each database backup along with the information about whether the backup was generated before or after the upgrade. For example:

```
The 'BigFix' upgrade completed successfully.
Following database backups have been stored in the
  folder /home/db2inst1/UpgradeBackup
- BFENT backup before upgrade (timestamp for this backup is:
  20160721151207)
- BFENT backup after  upgrade (timestamp for this backup is:
  20160721151637)
- BESREPOR backup before upgrade (timestamp for this backup is:
  20160721151554)
- BESREPOR backup before upgrade (timestamp for this backup is:
  20160721151637)
```

Troubleshooting the automatic databases backup feature

If one of the initial backup fails, the upgrade process fails.

Investigate what prevented the backup from running and rerun the upgrade.

If one of the two final backups fails, the BigFix server is upgraded successfully and you get a warning message informing you that one of the two final backups failed. Investigate what prevented the backup from running and rerun the backup of the database manually.

You find the information about the backup failure in the `/var/log/BESAdminDebugOut.txt` file.

Disabling the automatic databases backup feature

If you want to disable the automatic backup feature, run the command:

```
/opt/BESServer/bin/BESAdmin.sh -setadvancedoptions
    -sitePvkLocation=<pvkLocation> -sitePvkPassword=<pvkPassword>
    -delete automaticBackupLocation
```

Before upgrading

Perform these steps before upgrading the BigFix components:

1. Ensure that the BigFix WebUI service is stopped before starting to upgrade the BigFix components, and do not start it again until the overall upgrade procedure completes successfully.
2. Close all BigFix consoles.
3. Back up your BigFix server and database as described in [Server Backup \(on page 457\)](#).
4. Back up your `license.pvk`, `license.crt`, and `masthead.afxm` to a separate location on the BigFix server or to a USB key.
5. Ensure that you have enough free space for the BigFix database. The free space projection involves a number of factors: the row counts of specific tables, the density of the data pages storing the tables and indexes, and specific database options for log management and table compression. The basic consideration for the 9.5 upgrade

is to ensure that you can accommodate a 100% growth in the size of the database (twice its current size) if upgrading from V9.2. The additional space is required to manage the growth of tables for UTF-8 transcoding, including the allocation of temporary space for the movement of data within the BigFix databases. You can determine the database size through the `get_dbsize_info` procedure.

6. If your server is configured in a DSA environment, increase the replication interval to prevent the replication from failing repeatedly during the upgrade. For more information, see the Configuration Guide..
7. Upgrade the BigFix components in the following order:
 - a. Servers and consoles. The console and the server must have the same version and must be upgraded at the same time.
 - b. Relays
 - c. Clients

Servers, relays, and clients do not need to match versions and the upgrade of these components can occur at different times. Clients with earlier versions can continue to report to later versions of relays or servers, but might not have all the functionality of the later release.



Note: Existing BigFix proxy configurations are automatically migrated to the V9.5 proxy configuration settings and behavior. For more information about BigFix V9.5 proxy configuration settings, see [Setting up a proxy connection \(on page 420\)](#).

8. In a DSA environment run the BigFix Server upgrade on the primary server first. Then upgrade the secondary servers.



Note:

- For large deployments, the server upgrade might take several minutes.
- After upgrading, you might initially experience a slower deployment. The upgrade downtime might create a backlog of client reports and it might take several hours for the BigFix server to process this backlog after the upgrade completed.



- Check your password characters. After the upgrade, passwords containing non-ASCII characters are corrupted and users cannot log in anymore. In this case, before using the product, you must reset this type of password to either the same password or a new password without non-ASCII characters.

Upgrade prerequisite checks

The following prerequisite checks are automatically run by the upgrade procedure on the BigFix Server.

If any of these checks fails, the upgrade does not start and the procedure exits with an error message. You can rerun the upgrade after you ensure that all the condition that failed is satisfied. The upgrade procedure checks that:

- The size of the Upload Manager Buffer Directory and the number of files that it contains do not exceed the 90% of the values that are specified in the following settings:

```
_BESRelay_UploadManager_BufferDirectoryMaxSize
_BESRelay_UploadManager_BufferDirectoryMaxCount
```

If the check fails: Fix the issue by running the following Fixlets available in the BES Support site, and then rerun the upgrade:

```
2695: WARNING: Upload Manager Directory exceeds file max number - BES
      Server
2696: WARNING: Upload Manager Directory Full - BES Server
```

- The site names listed in the following columns of the database contain only ASCII characters:

```
LOCAL_OBJECT_DEFS.Name
LOCAL_OBJECT_DEFS.Sitename
```

If the check fails: Rename the site names and fix the content referencing them.

- The size of the data related to custom content and actions contained in the `ACTION_DEFS.Fields` and `LOCAL_OBJECT_DEFS.Fields` fields does not exceed the maximum size allowed in the new database schema.

If the check fails: Shorten the exceeding data length.

- The `VARGRAPHIC` fields in the database do not exceed the maximum size after transcoding.

If the check fails: Follow the instructions provided in the error message returned by the upgrade procedure. Depending on how critical the failure is, you might be requested to reduce the content of the fields as required before rerunning the upgrade, or to run the BigFix upgrade in two steps, to V9.5.4 first, and then to V9.5.5.

- The table spaces hosting the following tables have enough disk space available to store the WebUI indexes:

```
COMPUTERS
VERSIONS
DASHBOARDDATA
EXTERNAL_ANALYSIS_PROPERTY_TRANSLATIONS
EXTERNAL_ANALYSIS_TRANSLATIONS
EXTERNAL_FIXLET_ACTION_SETTINGS_USER_GROUPS
EXTERNAL_FIXLET_TRANSLATIONS
```

If the check fails: Move the tables to `USERSPACE1`. For information about how to accomplish this task, see https://www.ibm.com/support/knowledgecenter/en/SSEPGG_10.5.0/com.ibm.db2.luw.sql.rtn.doc/doc/r0055069.html.

- The number of rows contained in the `DBINFO` database table does not exceed one.

If the check fails: Remove the unnecessary rows from the table.

If you are in a DSA environment and any of the prerequisite checks fails on the primary server, which is the first one to be upgraded, run these steps:

1. Run the needed corrective actions on the primary server.
2. Wait for a full replica on the secondary servers to ensure that the same corrective actions are applied to their databases as well.
3. After the full replica completes, rerun the upgrade on the primary server and then on the secondary servers.

Automatic upgrade

You can proceed with an automatic upgrade using the "BigFix - Updated Platform Server Components version x.x.x Now Available!" Fixlet.



Note: For environments with a remote server or DSA, see [Manual upgrade \(on page 489\)](#).

Manual upgrade

Use the manual upgrade instead of the Fixlet upgrade when you upgrade a DSA multiple server environment.



Note: During the upgrade of a DSA server, ensure that no services are running on all the other DSA servers to prevent the upgrading system from becoming unstable when a replication process starts against it.

Upgrading the server

1. Copy the BigFix installable image to the BigFix server computer and extract it to a folder.
2. On the BigFix server computer, run the BigFix server upgrade script:

```
./install.sh -upgrade [-opt BES_LICENSE_PVK=<path+license.pvk>]
                    [-opt BES_LICENSE_PVK_PWD=<password>]
```

where:

-opt BES_LICENSE_PVK=<path+license.pvk>

Specifies the private key file (*filename.pvk*). This private key file and its password are required to update the product license and perform the required SHA-256 signature updates in the BigFix database.



Note: The notation `<path+license.pvk>` used in the command syntax stands for `path_to_license_file/license.pvk`.

-opt BES_LICENSE_PVK_PWD=<password>

Specifies the password associated to the private key file (*filename.pvk*).

The use of the optional parameters `BES_LICENSE_PVK` and `BES_LICENSE_PVK_PWD` depends on the current release or patch level that the installer is upgrading and, in the event the upgrade procedure requires to sign again the database, they are explicitly asked for during the upgrade process. As an alternative, you can specify them anyway and, if they are not required, they are ignored by the upgrade process.

The `install.sh` server script upgrades all the components it detects on the local server.

If a Web UI instance previously installed with a Fixlet is detected, also the Web UI component is upgraded.



Note: Before starting to upgrade, the upgrade procedure runs a set of prerequisite checks. If any of them fails, you can do the required corrective actions and then rerun the upgrade procedure. For more information, see [Upgrade prerequisite checks \(on page 471\)](#).

3. Run the Administration Tool (`./BESAdmin.sh` on Linux) to distribute the updated license:

```
/opt/BESServer/bin/BESAdmin.sh -syncmastheadandlicense
-sitePvkLocation=<path+license.pvk>
-sitePvkPassword=<password>
```

**Note:**

1. For troubleshooting information see `/var/log/BESInstall.log` and `/var/log/BESAdminDebugOut.txt` files.
2. After upgrading the server to Version 9.5.5, due to data movement in the database, the Web UI must select and get new data. This might temporarily prevent the FillDB process from processing the client reports.

Upgrading the Console

1. Copy the BigFix console installation folder (default is: `/var/opt/BESInstallers/Console`) to all Windows computers that are running the BigFix console.
2. Run the BigFix console installer (`setup.exe`) on all the Windows computers currently running the BigFix console.



Note: The BigFix console does not run on Linux computers.

Upgrading the relays

To upgrade the BigFix relays from the BigFix console, apply the **Updated Red Hat Enterprise Linux Relay** Fixlet to all relevant relays.



Note: When upgrading a BigFix Ubuntu relay from Versions 9.5.7 or 9.5.8 to Version 9.5.9, if you want to perform the manual upgrade, instead of running the **Updated Ubuntu Linux Relay** Fixlet, you must uninstall the relay and perform a fresh installation.

Upgrading the clients

You can upgrade the BigFix clients in several ways:

- Upgrade BigFix clients individually by copying the BigFix client installable image to each computer that is running the BigFix client, and then running the setup program as follows:

```
rpm -U xxx.rpm
```

where xxx is the name of the client installable image.

- Upgrade the BigFix clients by using the BigFix Client Deployment Tool, with a log in script, or with another deployment technology. Simply run the new BigFix Client installer on the computer with the old BigFix client.

Upgrading the Web Reports and WebUI standalone servers

To upgrade stand-alone Web Reports or WebUI servers or both, run the `install.sh` server upgrade script:

```
./install.sh -upgrade
```

To upgrade a standalone root server, WebUI server, or Web Reports server, you can also use the fixlet - BigFix - Updated Platform Server Components version 9.5.x (ID 4422), where x is the version to which you want to upgrade.



Note: Since the May 2023 WebUI update, Red Hat Linux 7 (64-bit) is no longer supported by the WebUI component. If you have the WebUI installed on this operating system, you need to move the WebUI on a supported operating system. For more details, refer to the BigFix WebUI documentation.



Note: If the WebUI is deployed, it should be upgraded at the same time as the BES Server. See [WebUI Installation](#).

Rollback

If you made a recovery copy of your BigFix Server data and configuration as described in [Server Backup \(on page 457\)](#), you can roll back your BigFix Server to its original status, before running the upgrade, following the instructions provided in [Server Recovery \(on page 459\)](#).

Chapter 19. Known limitations and workarounds

This section describes the known limitations and possible workarounds.

Client and Session relevance expressions with a large number of elements

Known limitation: The evaluation of client or session relevance expressions containing a large number of elements could be expensive, and result in the crash of the process running them (Client, FixletDebugger, QnA, WebReports, and so on) depending on the hardware or software resources of the machine.

Workaround: Define the client or session relevance expressions with a limited number of elements inside. For example, avoid the use of relevance expressions containing an high number of logical conditions or hundreds of elements in a set.

Computer Name for Windows is limited to 15 characters

Known limitation: The Computer Name property for the Windows agents retrieves the Netbios name of the computer, which is limited to 15 characters. See <http://support.microsoft.com/kb/909264>.

Workaround: If you want something different from the Netbios name on Windows, you must use a different Inspector (retrieved property). You can use such properties as host name, dns name to provide additional values as needed.

Related information

[Limitations in Client Deploy Tool \(on page 246\)](#)

[Known limitations \(on page 267\)](#)

Appendix A. Logging

This section describes the log files associated with the BigFix components.

Running components logs

BES Root Server log

- Windows: `C:\Program Files (x86)\BigFix Enterprise\BES Server\BESRelay.log`
- Linux: `/var/log/BESRelay.log`

FillDB log

- Windows: `C:\Program Files (x86)\BigFix Enterprise\BES Server\FillDBData\FillDB.log`
- Linux: `/var/opt/BESServer/FillDBData/FillDB.log`

GatherDB log

- Windows: `C:\Program Files (x86)\BigFix Enterprise\BES Server\GatherDBData\GatherDB.log`
- Linux: `/var/opt/BESServer/GatherDBData/GatherDB.log`

Gather Status Report

- Windows: `http://127.0.0.1:52311/cgi-bin/bfenterprise/BESGatherMirrorNew.exe`
- Linux: Status Report does not exist.

Relay log

- Windows: `C:\Program Files (x86)\BigFix Enterprise\BES Relay\logfile.txt`
- Linux: `/var/log/BESRelay.log`

BigFix Administration Tool (BESAdmin) log

On **Windows**, there are two or more BESAdmin log files:

- For each user that runs BESAdmin, there is a specific log file

`C:\Users\{USERNAME}\AppData\Local\BigFix\BESAdminDebugOut.txt`

For example: `C:\Users\Administrator\AppData\Local\BigFix\BESAdminDebugOut.txt`

- When BESAdmin is invoked by a Fixlet (or run by the LocalSystem user), the log file is

`C:\Windows\System32\config\systemprofile\AppData\Local\BigFix\BESAdminDebugOut.txt`

On **Linux** systems, there is a single log file, located in the following folder:

- `/var/log/BESAdminDebugOut.txt`

To change the default behavior of BESadmin logging, depending on the operating system, perform the following:

- For Windows operating systems, create the following registry key

`HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\BigFix\Enterprise Server\BESAdmin`

and add the desired options.

- For Linux operating systems, in the `/var/opt/BESServer/besserver.config` file, add the following entry `[Software\BigFix\Enterprise Server\BESAdmin]` where to specify the options.

The following options control the logging behavior:

- **DebugOut:** (string) Full path to the log file.
- **EnableLogging:** (number, DWORD) Denotes whether the logging is active or not (1=yes, 0=no). The default is 1 when option **DebugOut** is not empty and 0 when **DebugOut** is empty.
- **EnabledLogs:** (string) Holds a list, separated by semicolons, with the logs that are logged. The default is `critical;debug;database`.
- **LogFileSizeLimit:** (number, DWORD) The size in bytes of each log before rotating them. The default is 10 MB.

Client log

The client records its current activity into a log file with the current date as the file name in the format `[year][month][day].log`. If an active log reaches 512K in size it will be moved to a backup (.bkg) file and a new log will be started for the current day. If the log reaches 512K again the backup will overwrite the existing backup. Both the active and backup logs will be deleted after ten days. These are the default locations of the BigFix client logs for each operating system:

- Windows: `C:\Program Files\BigFix Enterprise\BES Client\__BESData\__Global\Log`s
- UNIX, Linux: `/var/opt/BESClient/__BESData/__Global/Logs`
- Mac: `/Library/Application Support/Bigfix/BES Agent/__BESData/__Global/Logs`

BES Server Plugin Service log

The directory of the log file is `C:\Program Files\BigFix Enterprise\BES Server\Applications\Log`s.



Note: If you change the name or the path of log files, to avoid character display problems, ensure to use names that have only ASCII characters and not non-ASCII characters.

BES WebReports Server install/update log

- Windows: `%LOCALAPPDATA%\BigFix\BESInitializeBESReportsDB.txt`
- Linux: `/var/log/BESInitializeBESReportsDB.txt`

Logging settings

You can enable or disable the logging activity on some BigFix components by setting the following Windows registry keys:

Table 15. Logging settings

BigFix component	Registry key name	Registry key type	Registry key values
Windows Administration tool	EnableLogging	REG_DWORD	0 to disable and 1 to enable
Linux Administration tool	EnableLogging	REG_DWORD	0 to disable and 1 to enable
Console	EnableLogging	REG_DWORD	0 to disable and 1 to enable
Web Reports	LogOn	REG_DWORD	0 to disable and 1 to enable
Fixlet Debugger	EnableLogging	REG_DWORD	0 to disable and 1 to enable
FillDB	EnableLogging	REG_DWORD	0 to disable and 1 to enable
FillDB Performance	EnablePerformanceLogging	REG_DWORD	0 to disable and 1 to enable
FillDB Query Performance	EnableQueryPerformanceLogging	REG_DWORD	0 to disable and 1 to enable

Fixlet installation and upgrade logs

If you install or upgrade a BigFix component using a Fixlet, the path of the installation log is determined by the Fixlet.

The paths of the setup logs of the installation Fixlets are:

- {BigFix Client folder}\BesClientDeployToolInstall.log, for the Client Deploy Tool (CDT)
- {BigFix Client folder}\BesConsoleInstall.log, for the Console
- {BigFix Client folder}\BesPluginPortalInstall.log, for the Plugin Portal
- {BigFix Client folder}\BesRelayInstall.log, for the Relay
- {BigFix Client folder}\BesWebUIInstall.log, for the WebUI Service

The paths of the setup logs of the upgrade Fixlets are:

- C:\BesInstallationGeneratorUpgrade.log
- C:\BesServerUpgrade.log, for the Server and local Web Reports
- C:\BesWebReportsUpgrade.log, for standalone (remote) Web Reports
- {BigFix Client folder}\BesClientDeployToolInstall.log, for the Client Deploy Tool (CDT)
- {BigFix Relay folder}\BesRelayUpgrade.log, for the Relay
- {BigFix Server API folder}\BesServerApiUpgrade.log, for the Server API
- {BigFix WebUI folder}\BesWebUiUpgrade.log, for the WebUI Service

Manual installation and upgrade logs on Windows

No log is created by default when manually running a BigFix installer on Windows.

Such logs can still be created by passing specific options to the installers or by changing the default Windows settings [as described here](#) to globally enable the installation logging.

Manual installation and upgrade logs on Linux

On Linux, only the BigFix Server installer produces a log by default. The installation log and the upgrade log are both saved in `/var/log/BESInstall.log`

Remember that the BigFix Server installer can install several components at once: the Server, Web Reports, the WebUI and the Client.

Appendix B. Uninstalling the BigFix client

To uninstall the BigFix client installed on the various operating systems, see the following sections.


Uninstalling the BigFix Client on AIX

To uninstall the BigFix client installed on an AIX system, run the following steps:

1. From your AIX terminal, run "smitty".

```
# smitty
```

2. Select "Software Installation and Maintenance".

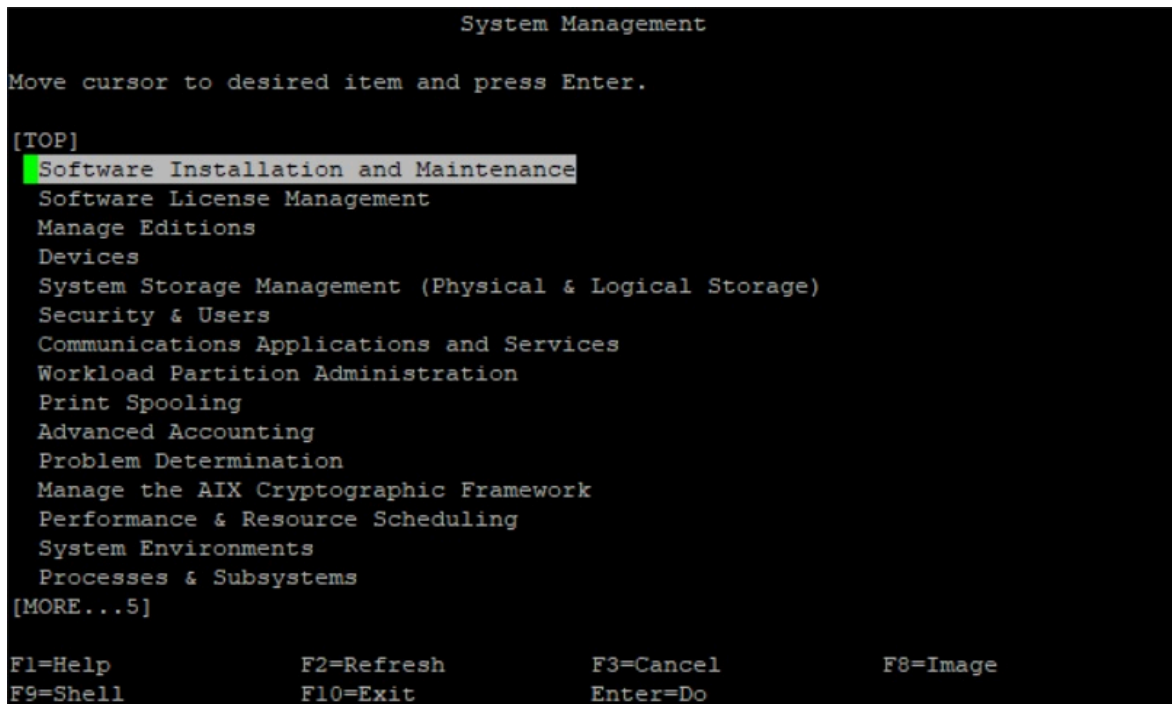

```
System Management

Move cursor to desired item and press Enter.

[TOP]
Software Installation and Maintenance
Software License Management
Manage Editions
Devices
System Storage Management (Physical & Logical Storage)
Security & Users
Communications Applications and Services
Workload Partition Administration
Print Spooling
Advanced Accounting
Problem Determination
Manage the AIX Cryptographic Framework
Performance & Resource Scheduling
System Environments
Processes & Subsystems
[MORE...5]

F1=Help      F2=Refresh   F3=Cancel    F8=Image
F9=Shell     F10=Exit    Enter=Do
```

3. Select "Software Maintenance and Utilities".

```

Software Installation and Maintenance

Move cursor to desired item and press Enter.

Install and Update Software
List Software and Related Information
Software Maintenance and Utilities
Software Service Management
Relocatable Software Installation and Maintenance
Network Installation Management
EZ NIM (Easy NIM Tool)
System Workload Partition Software Maintenance
System Backup Manager
Alternate Disk Installation
EFIX Management
Thin Server Maintenance

F1=Help      F2=Refresh   F3=Cancel    F8=Image
F9=Shell     F10=Exit    Enter=Do

```

4. Select "Remove Installed Software".

```

Software Maintenance and Utilities

Move cursor to desired item and press Enter.

Commit Applied Software Updates (Remove Saved Files)
Reject Applied Software Updates (Use Previous Version)
Remove Installed Software
Rename Software Images in Repository
Clean Up Software Images in Repository

Copy Software to Hard Disk for Future Installation
Copy Software Bundle to Hard Disk for Future Installation

Check Software File Sizes After Installation
Verify Software Installation and Requisites


Clean Up After Failed or Interrupted Installation

Service Update Management Assistant (SUMA)

F1=Help      F2=Refresh   F3=Cancel    F8=Image
F9=Shell     F10=Exit    Enter=Do

```

5. Set the "PREVIEW only" entry field to "no" and the "REMOVE dependent software" entry field to "yes".

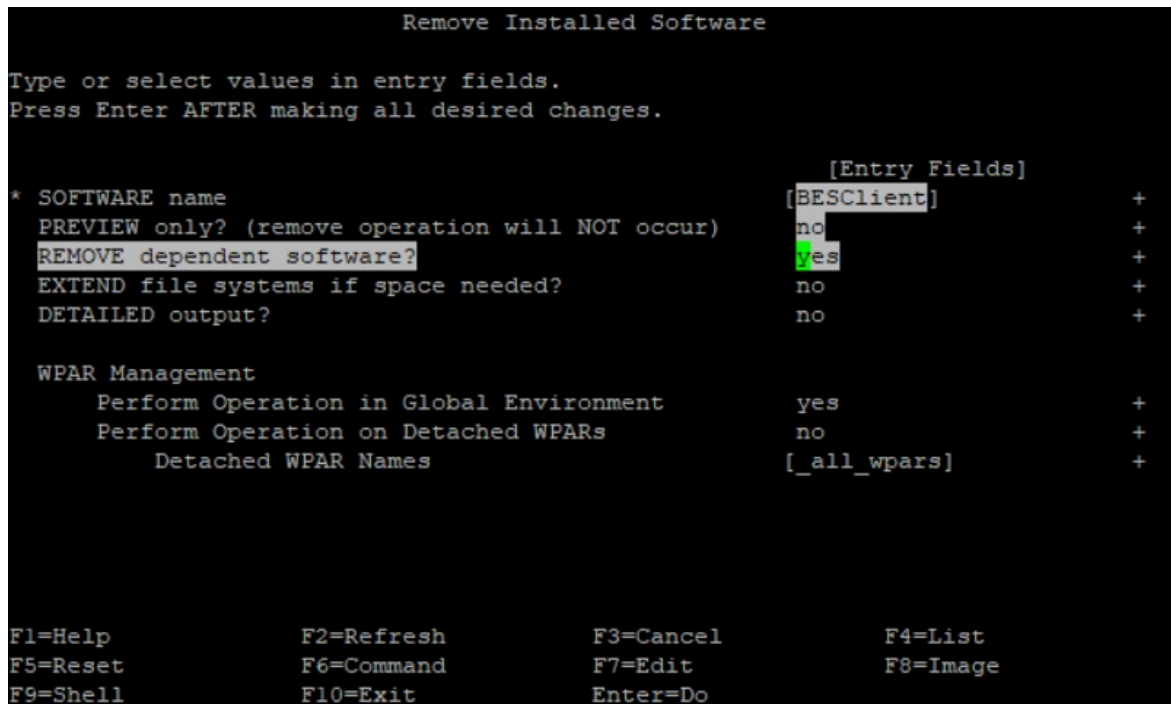

6. Press Enter to remove the software.

Uninstalling the BigFix Client on Linux

To uninstall the BigFix client installed on a Linux operating system, follow the appropriate steps.

To manually uninstall the client on **Red Hat Enterprise Linux (RHEL)** and **SUSE Linux Enterprise Server (SLES)**:

1. Stop the BigFix client process

```
service BESClient stop
```

2. Run the following RPM command to find the installed package name

```
rpm -qa | grep -i BESAgent
```

3. Uninstall the installed RPM package returned in step 2

```
rpm -e BESAgent-XXX
```

4. Manually remove the following directories

```
rm -rf /etc/opt/BESClient
rm -rf /opt/BESClient
rm -rf /tmp/BES
rm -rf /var/opt/BESClient
rm -rf /var/opt/BESCommon
```

To manually uninstall the client on **Ubuntu Linux, Debian Linux** and **Raspbian**:

1. Stop the BigFix client process

```
/etc/init.d/besclient stop
```

2. Run the following command to find the installed package name

```
dpkg -l | grep -i BESAgent
```

3. Uninstall the installed package returned in step 2

```
dpkg --purge BESAgent-XXX
```

4. Manually remove the following directories

```
rm -rf /etc/opt/BESClient
rm -rf /opt/BESClient
rm -rf /tmp/BES
rm -rf /var/opt/BESClient
rm -rf /var/opt/BESCommon
```

Uninstalling the BigFix Client on Solaris

If you have a BigFix Relay installed on the same computer, *first remove the BigFix Relay* and then proceed with the BigFix client uninstallation.

If you installed the client using the SVR4 (.pkg file) format

To uninstall the BigFix client installed on a Solaris operating system, if you installed it using the legacy SVR4 (.pkg file) format, perform the following steps:

1. Stop the agent process before removing it

```
/etc/init.d/besclient stop
```

2. Uninstall the BigFix Client by running the following command

```
pkgrm BESagent
```

3. Manually remove the following directories

```
rm -rf /etc/opt/BESClient
rm -rf /var/opt/BESClient
rm -rf /opt/BESClient
rm -rf /var/opt/BESCommon
```

If you installed the client using the IPS (.p5p file) format

To uninstall the BigFix client installed on a Solaris 11 operating system, if you installed it using the IPS (.p5p file) format, perform the following steps:

1. Stop the agent process before removing it

```
/etc/init.d/besclient stop
```

2. Uninstall the BigFix Client by running the following command

```
pkg uninstall BESagent
```

Uninstalling the IPS package moves the files added at runtime under **\$IMAGE_META/lost+found**. The default value for IMAGE_META is **/var/pkg**. The uninstall command shows a message reporting the actual paths, for example:

```
The following unexpected or editable files and directories were
salvaged while executing the requested package operation; they
have been moved to the displayed location in the image:
/var/opt/BESClient
-> /var/pkg/lost+found/var/opt/BESClient-20190320T135633Z
```

3. Manually remove all the directories listed in the uninstall message, for example:

```
rm -rf /var/pkg/lost+found/var/opt/BESClient-20190320T135633Z
```

4. In addition, manually remove the `/etc/opt/BESClient` directory by running the following command

```
rm -rf /etc/opt/BESClient  
rm -rf /var/opt/BESCommon
```

Uninstalling the BigFix Client on Mac

How to uninstall the BigFix client installed on a Mac OS operating system.

The Mac OS package provides an uninstallation script, so to remove the BigFix client use *sudo* to run the following script:

```
sudo /Library/BESAgent/BESAgent.app/Contents/MacOS/BESAgentUninstaller.sh
```

Appendix C. Glossary

This glossary provides terms and definitions for the [product name] software and products.

The following cross-references are used in this glossary:

- *See* refers you from a nonpreferred term to the preferred term or from an abbreviation to the spelled-out form.
- *See also* refers you to a related or contrasting term.

For other terms and definitions, see the [HCL Terminology website](#) (opens in new window).

[A \(on page 506\)](#) [B \(on page 507\)](#) [C \(on page 507\)](#) [D \(on page 509\)](#) [E \(on page 511\)](#) [F \(on page 512\)](#) [G \(on page 512\)](#) [L \(on page 512\)](#) [M \(on page 512\)](#) [N \(on page 513\)](#) [O \(on page 514\)](#) [P \(on page 514\)](#) [R \(on page 514\)](#) [S \(on page 515\)](#) [T \(on page 517\)](#) [U \(on page 518\)](#) [V \(on page 518\)](#) [W \(on page 518\)](#)

A

action

1. See [Fixlet \(on page 512\)](#).
2. A set of Action Script commands that perform an operation or administrative task, such as installing a patch or rebooting a device.

Action Script

Language used to perform an action on an endpoint.

agent

See [BigFix agent \(on page 507\)](#).

ambiguous software

Software that has an executable that looks like another executable, or that exists in more than one place in a catalog (Microsoft Word as a standalone product or bundled with Microsoft Office).

audit patch

A patch used to detect conditions that cannot be remediated and require the attention of an administrator. Audit patches contain no actions and cannot be deployed.

automatic computer group

A computer group for which membership is determined at run time by comparing the properties of a given device against the criteria set for group membership. The set of devices in an automatic group is dynamic, meaning it can and does change. See also [computer group \(on page 508\)](#).

B

baseline

A collection of actions that are deployed together. A baseline is typically used to simplify a deployment or to control the order in which a set of actions are applied. See also [deployment group \(on page 510\)](#).

BigFix agent

The BigFix code on an endpoint that enables management and monitoring by BigFix.

BigFix client

See [BigFix agent \(on page 507\)](#).

BigFix console

The primary BigFix administrative interface. The console provides a full set of capabilities to BigFix administrators.

C

client

A software program or computer that requests services from a server. See also [server \(on page 516\)](#).

client time

The local time on a BigFix client's device.

Common Vulnerabilities and Exposures Identification Number (CVE ID)

A number that identifies a specific entry in the National Vulnerability Database. A vendor's patch document often includes the CVE ID, when it is available. See also [National Vulnerability Database \(on page 513\)](#).

Common Vulnerabilities and Exposures system (CVE)

A reference of publicly known network vulnerabilities which is part of the National Vulnerabilities Database (NVD), maintained by the US National Institute of Standards and Technology (NIST).

component

An individual action within a deployment that has more than one action. See also [deployment group \(on page 510\)](#).

computer group

A group of related computers. An administrator can create computer groups to organize systems into meaningful categories, and to facilitate deployment of content to multiple computers. See also [automatic computer group \(on page 507\)](#), [manual computer group \(on page 512\)](#).

console

See [BigFix console \(on page 507\)](#).

content

Digitally-signed files containing data, rules, queries, criteria, and other instructions, packaged for deployment across a network. BigFix agents use the detection criteria (Relevance statements) and action instructions (Action Script statements) in content to detect vulnerabilities and enforce network policies.

content relevance

A determination of whether a patch or piece of software is eligible for deployment to one or more devices. See also [device relevance \(on page 511\)](#).

Coordinated Universal Time (UTC)

The international standard of time that is kept by atomic clocks around the world.

corrupt patch

A patch that flags an operator when corrections made by an earlier patch have been changed or compromised. This can occur when an earlier service pack or application overwrites later files, resulting in patched files that are no longer current. The corrupt patch flags the situation and can be used to re-apply the later patch.

custom content

BigFix code created by a customer for use on their own network, for example, a custom patch or baseline.

CVE

See [Common Vulnerabilities and Exposures system \(on page 508\)](#).

CVE ID

See [Common Vulnerabilities and Exposures Identification Number \(on page 508\)](#).

D

data stream

A string of information that serves as a source of package data.

default action

The action designated to execute when a Fixlet is deployed. When no default action is defined, the operator is prompted to choose between several actions or to make an informed decision about a single action.

definitive package

A string of data that serves as the primary method for identifying the presence of software on a computer.

deploy

To dispatch content to one or more endpoints for execution to accomplish an operation or task, for example, to install software or update a patch.

deployment

Information about content dispatched to one or more endpoints, a specific instance of dispatched content.

deployment group

The collection of actions created when an operator selects more than one action for a deployment, or a baseline is deployed. See also [baseline \(on page 507\)](#), [component \(on page 508\)](#), [deployment window \(on page 510\)](#), [multiple action group \(on page 513\)](#).

deployment state

The eligibility of a deployment to run on endpoints; includes any parameters set by the operator, such as 'Start at 1AM, end at 3AM.'

deployment status

Cumulative results of all targeted devices, expressed as a percentage of deployment success.

deployment type

An indication of whether a deployment involved one action or multiple actions.

deployment window

The period during which a deployment's actions are eligible for execution. For example, if a Fixlet has a deployment window of 3 days and an eligible device that has been offline reports in to BigFix within the 3-day window, it gets the Fixlet. If the device comes back online after the 3-day window expires, it does not get the Fixlet. See also [deployment group \(on page 510\)](#).

device

An endpoint, for example, a laptop, desktop, server, or virtual machine managed by BigFix; an endpoint running the BigFix Agent.

device holder

The person using a BigFix-managed computer.

device property

Information about a device collected by BigFix, including details about its hardware, operating system, network status, settings, and BigFix client. Custom properties can also be assigned to a device.

device relevance

A determination of whether a piece of BigFix content applies to applies to a device, for example, where a patch should be applied, software installed, or a baseline run. See also [content relevance \(on page 508\)](#).

device result

The state of a deployment, including the end result, on a particular endpoint.

Disaster Server Architecture (DSA)

An architecture that links multiple servers to provide full redundancy in case of failure.

DSA

See [Disaster Server Architecture \(on page 511\)](#).

dynamically targeted

Pertaining to using a computer group to target a deployment.

E

endpoint

A networked device running the BigFix agent.

F

filter

To reduce a list of items to those that share specific attributes.

Fixlet

A piece of BigFix content containing Relevance and Action Script statements bundled together to perform an operation or task. Fixlets are the basic building blocks of BigFix content. A Fixlet provides instructions to the BigFix agent to perform a network management or reporting action.

G

group deployment

A type of deployment where multiple actions were deployed to one or more devices.

L

locked

An endpoint state that prevents the majority of BigFix actions from running until the device is unlocked.

M

MAG

See [multiple action group \(on page 513\)](#).

management rights

The limitation of console operators to a specified group of computers. Only a site administrator or a master operator can assign management rights.

manual computer group

A computer group for which membership is determined through selection by an operator. The set of devices in a manual group is static, meaning they do not change. See also [computer group \(on page 508\)](#).

master operator

A console operator with administrative rights. A master operator can do almost everything a site administrator can do, with the exception of creating new operators.

masthead

A collection of files that contain the parameters of the HCL BigFix process, including URLs to Fixlet content. The HCL BigFix agent brings content into the enterprise based on subscribed mastheads.

mirror server

A BigFix server required if the enterprise does not allow direct web access but instead uses a proxy server that requires password-level authentication.

multiple action group (MAG)

A BigFix object that is created when multiple actions are deployed together, as in a baseline. A MAG contains multiple Fixlets or Tasks. See also [deployment group \(on page 510\)](#).

N

National Vulnerability Database (NVD)

A catalog of publicly-known information security vulnerabilities and exposures maintained by the National Institute of Standards and Technology (NIST). See also [Common Vulnerabilities and Exposures Identification Number \(on page 508\)](#).

NVD

See [National Vulnerability Database \(on page 513\)](#).

O

offer

A deployment option that allows a device holder to accept or decline a BigFix action and to exercise some control over when it runs. For example, whether or not to install a software application, and whether to run the installation at night or during the day.

open-ended deployment

A deployment with no end or expiration date; one that runs continuously, checking whether or not the computers on a network comply.

operator

A person who uses the BigFix WebUI, or portions of the BigFix console.

P

patch

A piece of code added to vendor software in order to fix a problem, as an immediate solution that is provided to users between two releases.

patch category

A description of a patch's type and general area of operation, for example, a bug fix or a service pack.

patch severity

The level of risk imposed by a network threat or vulnerability and, by extension, the importance of applying its patch.

R

relay

A client that is running special server software. Relays spare the server and the network by minimizing direct server-client downloads and by compressing upstream data.

Relevance

BigFix query language used to determine the applicability of a piece of content to a given endpoint. Relevance asks yes or no questions and evaluates the results. The result of a Relevance query determines whether an action can or should be applied. Relevance is paired with Action Script in Fixlets.

S

SCAP

See [Security Content Automation Protocol \(on page 516\)](#).

SCAP check

A specific configuration check within a Security Content Automation Protocol (SCAP) checklist. Checks are written in XCCDF and are required to include SCAP enumerations and mappings per the SCAP template.

SCAP checklist

A configuration checklist that is written in a machine readable language (XCCDF). Security Content Automation Protocol (SCAP) checklists have been submitted to and accepted by the NIST National Checklist Program. They also conform to a SCAP template to ensure compatibility with SCAP products and services.

SCAP content

A repository that consists of security checklist data represented in automated XML formats, vulnerability and product name related enumerations, and mappings between the enumerations.

SCAP enumeration

A list of all known security related software flaws (CVEs), known software configuration issues (CCEs), and standard vendor and product names (CPEs).

SCAP mapping

The interrelationship of enumerations that provides standards-based impact measurements for software flaws and configuration issues.

Security Content Automation Protocol (SCAP)

A set of standards that is used to automate, measure, and manage vulnerability and compliance by the National Institute of Standards and Technology (NIST).

server

A software program or a computer that provides services to other software programs or other computers. See also [client](#) ([on page 507](#)).

signing password

A password that is used by a console operator to sign an action for deployment.

single deployment

A type of deployment where a single action was deployed to one or more devices.

site

A collection of BigFix content. A site organizes similar content together.

site administrator

The person in charge of installing BigFix, authorizing and creating new console operators.

software package

A collection of Fixlets that install a software product on a device. Software packages are uploaded to BigFix by an operator for distribution. A BigFix software package includes the installation files, Fixlets to install the files, and information about the package (metadata).

SQL Server

A full-scale database engine from Microsoft that can be acquired and installed into the BigFix system to satisfy more than the basic reporting and data storage needs.

standard deployment

A deployment of BigFix that applies to workgroups and to enterprises with a single administrative domain. It is intended for a setting in which all Client computers have direct access to a single internal server.

statistically targeted

Pertaining to the method used to target a deployment to a device or piece of content. Statically targeted devices are selected manually by an operator.

superseded patch

A type of patch that notifies an operator when an earlier version of a patch has been replaced by a later version. This occurs when a later patch updates the same files as an earlier one. Superseded patches flag vulnerabilities that can be remediated by a later patch. A superseded patch cannot be deployed.

system power state

A definition of the overall power consumption of a system. BigFix Power Management tracks four main power states Active, Idle, Standby or Hibernation, and Power Off.

T

target

To match content with devices in a deployment, either by selecting the content for deployment, or selecting the devices to receive content.

targeting

The method used to specify the endpoints in a deployment.

task

A type of Fixlet designed for re-use, for example, to perform an ongoing maintenance task.

U

UTC

See [Coordinated Universal Time \(on page 509\)](#).

V

virtual private network (VPN)

An extension of a company intranet over the existing framework of either a public or private network. A VPN ensures that the data that is sent between the two endpoints of its connection remains secure.

VPN

See [virtual private network \(on page 518\)](#).

vulnerability

A security exposure in an operating system, system software, or application software component.

W

Wake-from-Standby

A mode that allows an application to turn a computer on from standby mode during predefined times, without the need for Wake on LAN.

Wake on LAN

A technology that enables a user to remotely turn on systems for off-hours maintenance. A result of the Intel-HCL Advanced Manageability Alliance and part of the Wired for Management Baseline Specification, users of this technology can remotely turn on a server and control it across the network,

thus saving time on automated software installations, upgrades, disk backups, and virus scans.

WAN

See [wide area network](#) (*on page 519*).

wide area network (WAN)

A network that provides communication services among devices in a geographic area larger than that served by a local area network (LAN) or a metropolitan area network (MAN).

Appendix D. Support

For more information about this product, see the following resources:

- [Knowledge Center](#)
- [BigFix Support Center](#)
- [BigFix Support Portal](#)
- [BigFix Developer](#)
- [BigFix Wiki](#)
- [HCL BigFix Forum](#)

Appendix E. Accessibility features for BigFix

Accessibility features assist users who have a disability, such as restricted mobility or limited vision, to use information technology content successfully.

Accessibility features

BigFix includes the following major accessibility features:

- Keyboard-only operation
- Operations that use a screen reader

BigFix uses the latest W3C Standard, [WAI-ARIA 1.0](http://www.w3.org/TR/wai-aria/) (<http://www.w3.org/TR/wai-aria/>), to ensure compliance to [US Section 508](http://www.access-board.gov/guidelines-and-standards/communications-and-it/about-the-section-508-standards/section-508-standards) (<http://www.access-board.gov/guidelines-and-standards/communications-and-it/about-the-section-508-standards/section-508-standards>), and [Web Content Accessibility Guidelines \(WCAG\) 2.0](http://www.w3.org/TR/WCAG20/) (<http://www.w3.org/TR/WCAG20/>). To take advantage of accessibility features, use the latest release of your screen reader in combination with the latest web browser that is supported by this product.

Keyboard navigation

This product uses standard navigation keys.

BigFix uses the following keyboard shortcuts.

Table 16. Keyboard shortcuts in BigFix

Action	Shortcut for Internet Explorer	Shortcut for Firefox
Move to the Contents View frame	Alt+C, then press Enter and Shift+F6	Shift+Alt+C and Shift+F6

Interface information

The BigFix user interfaces do not have content that flashes 2 - 55 times per second.

BigFix Web UI


The BigFix web user interfaces rely on cascading style sheets to render content properly and to provide a usable experience. The application provides an equivalent way for low-vision users to use a user's system display settings, including high-contrast mode. You can control font size by using the device or web browser settings.

The BigFix web user interface includes WAI-ARIA navigational landmarks that you can use to quickly navigate to functional areas in the application.

BigFix Client Dashboard

The BigFix Client Dashboard shows message boxes to the end-users logged in to the client computer. It pops up on the managed end user systems when an action or an offer is triggered. The messages displayed include pre-action messages, action running messages, and shutdown and restart messages. In this dashboard use:


- The Tab key to navigate to the offer list.
- Up and Down arrows to move selection.
- Space to select an offer.
- Ctrl+A to select all text in the HTML description pane.
- Ctrl+C to copy the selected text.

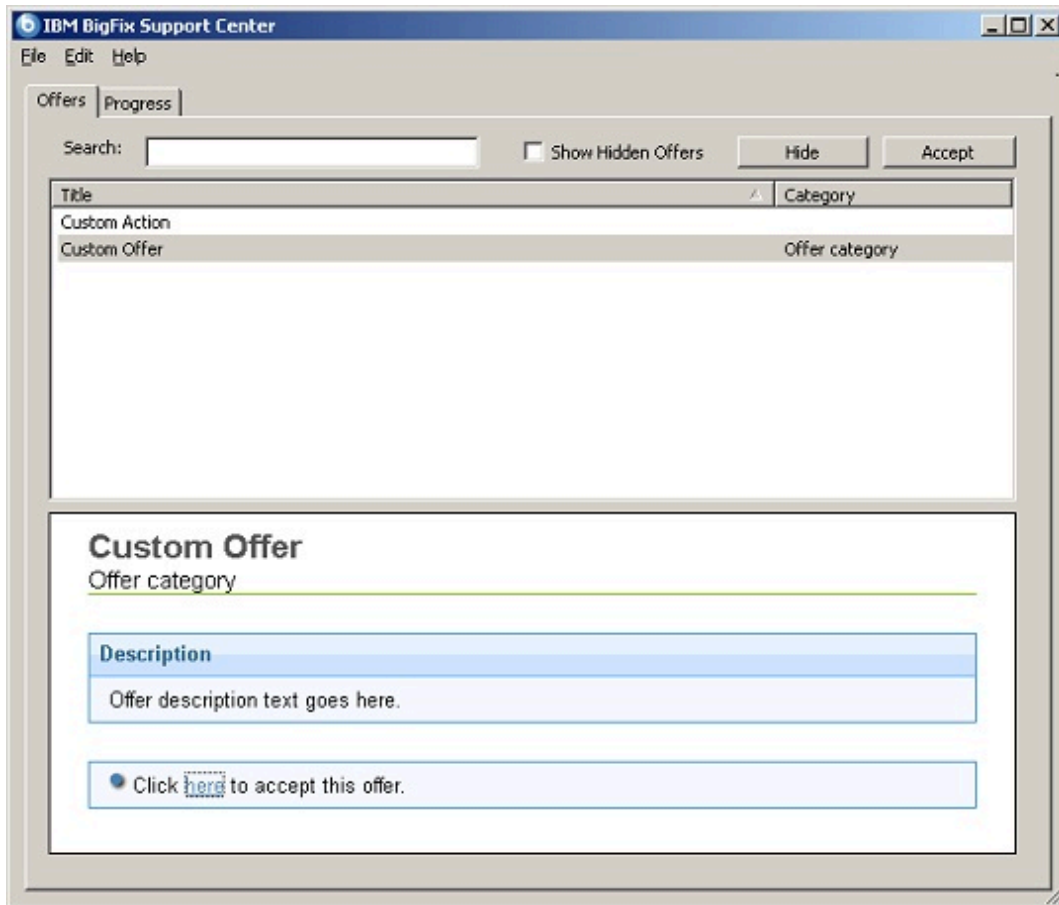

Within the selected offer use:

- Tab key to navigate to the HTML description pane.
- Once position on the "Click here to accept this offer" button, Space to accept the offer.

Use Ctrl+A to select all text in the HTML description pane and then Ctrl+C to copy it.

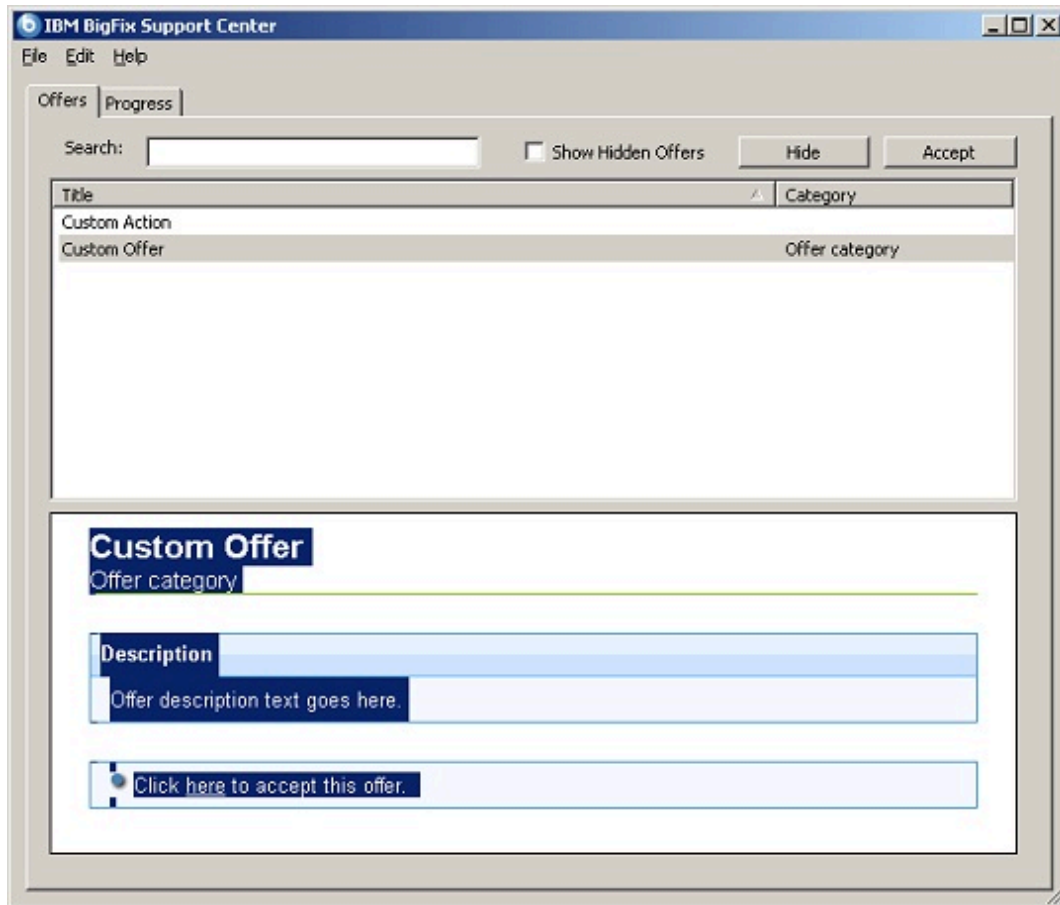

Vendor software

BigFix includes certain vendor software that is not covered under the license agreement. HCL makes no representation about the accessibility features of these products. Contact the vendor for the accessibility information about its products.

Notices

This information was developed for products and services offered in the US.

HCL may not offer the products, services, or features discussed in this document in other countries. Consult your local HCL representative for information on the products and services currently available in your area. Any reference to an HCL product, program, or service is not intended to state or imply that only that HCL product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any HCL intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-HCL product, program, or service.

HCL may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

For license inquiries regarding double-byte character set (DBCS) information, contact the HCL Intellectual Property Department in your country or send inquiries, in writing, to:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

HCL TECHNOLOGIES LTD. PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. HCL may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-HCL websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this HCL product and use of those websites is at your own risk.

HCL may use or distribute any of the information you provide in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

HCL

330 Potrero Ave.

Sunnyvale, CA 94085

USA

Attention: Office of the General Counsel

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by HCL under terms of the HCL Customer Agreement, HCL International Program License Agreement or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-HCL products was obtained from the suppliers of those products, their published announcements or other publicly available sources. HCL has not tested those products and cannot confirm the accuracy of performance, compatibility or

any other claims related to non-HCL products. Questions on the capabilities of non-HCL products should be addressed to the suppliers of those products.

Statements regarding HCL's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to HCL, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. HCL, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS," without warranty of any kind. HCL shall not be liable for any damages arising out of your use of the sample programs.

Each copy or any portion of these sample programs or any derivative work must include a copyright notice as follows:

© (your company name) (year).

Portions of this code are derived from HCL Ltd. Sample Programs.

Trademarks

HCL Technologies Ltd. and HCL Technologies Ltd. logo, and hcl.com are trademarks or registered trademarks of HCL Technologies Ltd., registered in many jurisdictions worldwide.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Other product and service names might be trademarks of HCL or other companies.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the HCL website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of HCL.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of HCL.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

HCL reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by HCL, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

HCL MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.