

Custom A-Pillar Pod Installation Instructions

Part#'s 32304/32307/32308 Works On:
'09+ Dodge Ram

What's Included:




STEP 1:

Using a 10 mm socket, remove the bolt that holds the stock A-pillar in place. It is located about halfway down the pillar behind a small oval cover piece.

STEP 2:

Pull out the weather stripping around the A-pillar (so it can be moved easily). Next, run the HDMI cable to the top of the dash then run the cable up the side of the dash being sure to leave some slack.

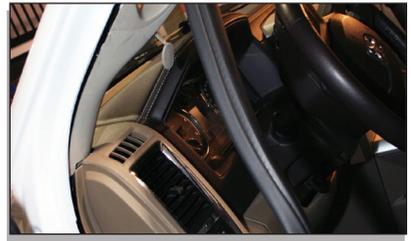

STEP 3:

Peel the clear strip(s) off the adhesive tape on the back of the pod mount and line up the gauge pod. Be careful not to touch the pod to the vehicle (adhesive tape). The bottom of the pod should match the bottom of the A-pillar.



STEP 4:

Make sure that the HDMI cable is sticking out through the gauge hole.

STEP 5:

Slide the pod down until the pod screw hole lines up with the screw hole on the stock A-pillar. Be careful not to touch the pod to the pillar (adhesive tape).

STEP 6:

Use the provided bolt (not the stock bolt) to secure the gauge pod and the stock A-pillar to the vehicle frame.

STEP 7:

Firmly press down on the parts of the pod mount where the adhesive tape touches the stock A-pillar for a secure attachment. Replace the driver's side dash panel and re-secure the weather stripping.

If installing another tuner install the appropriate pod adapter at this time. **LWTS+ requires part # 30604 and GTX requires part # 30605, which is not included.** Follow instructions on installing the located on the inside of the packaging card. If you have stock speakers be sure to reconnect them at this time.

