

Bully Dog Technologies, LLC.
2854 West 2200 South, Aberdeen, ID 83210
Phone (208) 397-3200 Fax (208) 397-7060
Email: info@bullydog.com

REMEMBER THIS IS A PERFORMANCE PRODUCT USE AT YOUR OWN RISK.

This product is not intended to be used to break any law.

It is necessary to remove the unit before taking your vehicle to the dealer for service, as it may interfere with the diagnostic equipment.

Do not use this product until you have carefully read the following agreement.

This product may affect the ability of your dealer to diagnose any problem on your vehicle so it must be removed before taking it to your dealer.

This agreement sets forth the terms and conditions for the use of this product. The installation of this product indicates that the buyer has read and understands this agreement and accepts the terms and conditions.

DISCLAIMER OF LIABILITY

Bully Dog Technologies, LLC. Its distributors, jobbers, and dealers (hereafter Seller) shall be in no way responsible for the product's proper use and service. **THE BUYER HERBY WAIVES ALL LIABILITY CLAIMS.**

The Buyer acknowledges that he is not relying on the Sellers skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyers hereby waiver all remedies or liabilities expressed or implied, arising by law or otherwise, (including without any obligation of the Seller with respect fitness, merchantability and consequential damages) or whether or not occasioned by the Seller's negligence.

The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the seller harmless from any claim related to the item of the equipment purchased. **Under no circumstances will the Seller or Manufacturer be liable for any damages or expenses by reason of use or sale of any such equipment.**

The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt contact the manufacturer.

The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

BULLY DOG TECHNOLOGIES, LLC. (Hereafter "Seller") gives Limited Warranty as to description, quality, merchantability, and fitness for any particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall be in no way responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except be a written instrument signed by Seller and Buyer.

The Warranty is Limited to one (1) year from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by BULLY DOG TECHNOLOGIES, LLC.

Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

BULLY DOG TECHNOLOGIES

UNCOMPROMISED DIESEL PERFORMANCE P/N 41063
ADJUSTABLE POWER HOUND MODULE
6.0 L FORD POWERSTROKE DIESEL P/N# 41063



Bill of Materials:

POWER HOUND module.
Instructions
Special Pliers.

Tools you need:

Flat blade screw driver may help to disconnect the IDM plug.

Recommended accessories:

Pyrometer & Boost gauges
Rapid Flow Intake & Rapid Flow Exhaust
208-397-3200

Installation of Bully Dog POWER HOUND module

Read disclaimer before installation

REMEMBER THIS IS A PERFORMANCE PRODUCT USE AT YOUR OWN RISK.

This product is not intended to be used to break any law.


It is necessary to remove the unit before taking your vehicle to the dealer for service, as it may interfere with the diagnostic equipment.

NOTE: Your module may have gray, purple, and black wires. These wires are for possible future upgrades, and do not need to be connected anywhere at this time.

1. Locate the IDM (injector drive module) FIG1.
2. Unplug the plug closest to the front of the vehicle from the IDM. FIG. 2 See 2nd page.
3. Plug-in the connector from the POWER HOUND module that looks identical to the one you unplugged from the IDM.
4. Plug-in the one you unplugged from the IDM into the POWER HOUND module wiring harness.
5. Unplug Map Sensor plug. FIG.3
6. Plug-in the plug that looks identical to the Map sensor plug from the POWER HOUND module into the Map Sensor.
7. Plug-in the one you unplugged from the Map Sensor into the POWER HOUND module wiring harness.
8. On the drivers side of the engine bay find a suitable place to velcro the POWER HOUND module down.
9. Route the switch wire into the cab either through the door jam or through a hole in the firewall. Make certain the wire will not be damaged by the door closing or any sharp edges.
10. When the switch is closest to the groove it is in the stock position, the center is 60hp and opposite the groove is 110hp*.
11. Automatic transmissions may respond erratically for a short time, but should adapt to the additional power within a few hundred miles.

NOTICE: It is necessary to remove the Power Hound Module before taking your vehicle to the dealer for service. If your dealer reflashes your vehicles computer with the module on, it will be erased and there will be a \$50.00 fee to reprogram it.

* The high setting on this module is designed for race use only. You may encounter some shifting problems under $\frac{3}{4}$ throttle. This setting is designed for full throttle maximum acceleration only. A pyrometer is required in order to operate in the high setting.

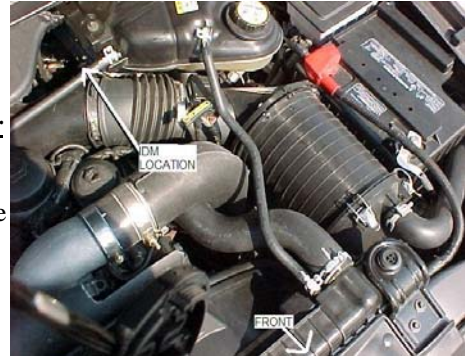

IDM LOCATION FIG. 1



IDM PLUG LOCATION FIG. 2




MAP SENSOR LOCATION FIG. 3

BULLY DOG TECHNOLOGIES

2854 W 2200 S
ABERDEEN
ID 83210
1-208-397-3200

www.bullydog.com

When disconnecting the plug use the supplied pliers tool and squeeze slightly then lightly push the plug with a screwdriver.

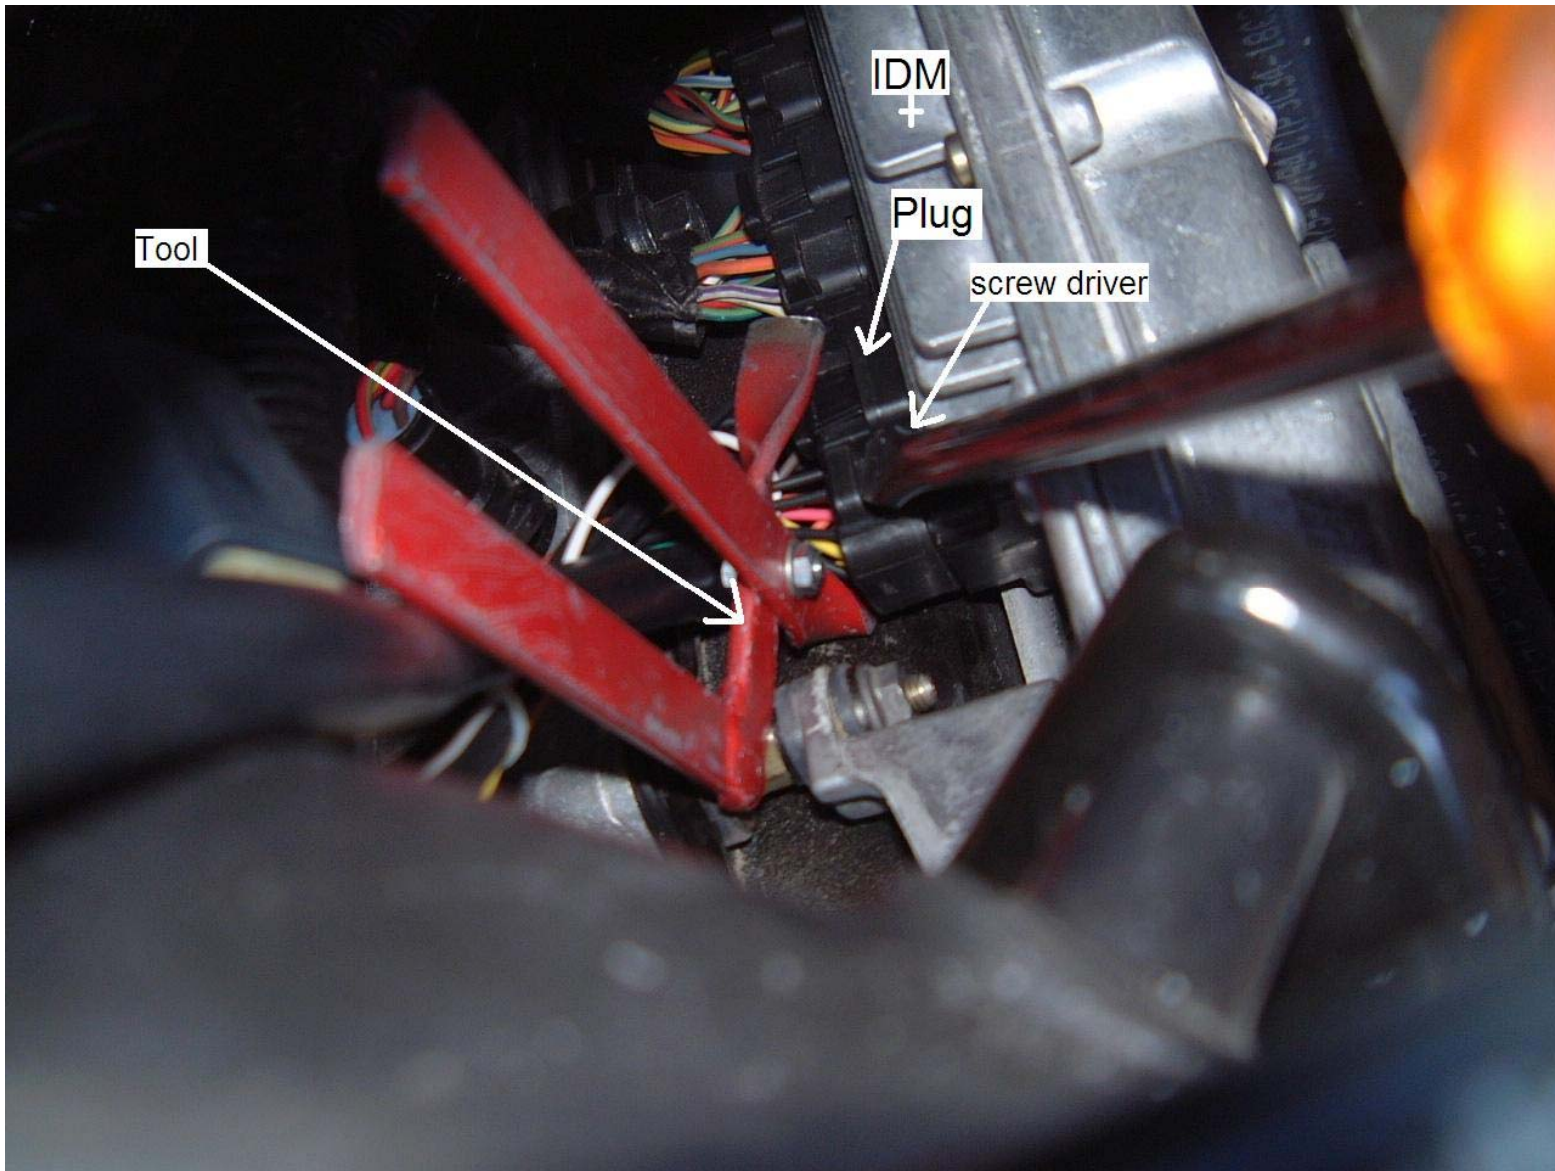

Warning: The supplied pliers tool is not designed to be used for any other use.