


# BK1216 Spindle and Screw Selection for door from 1.75" to 2.25" thick

Print out this sheet using 1:1 scale

## Handle spindle selection

1. Over lay handle spindle on top of the image.
2. Select the spindle that matches your door thickness.

### Door thickness

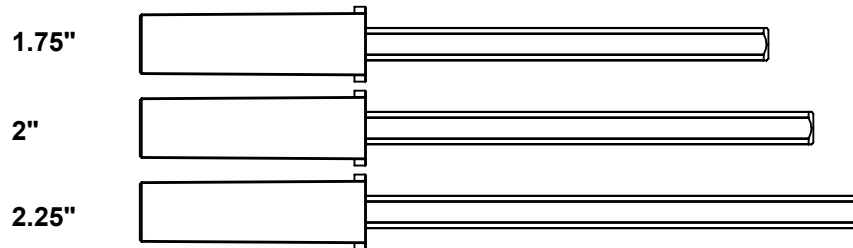

## Latch screw selection


1. Over lay screws on top of the image.
2. Select the screws that match your door thickness.

### Door thickness



## Key lock spindle preparation

1. Over lay flat spindle against the image.
2. Mark door thickness on the spindle.
3. Cut off beyond the mark line.

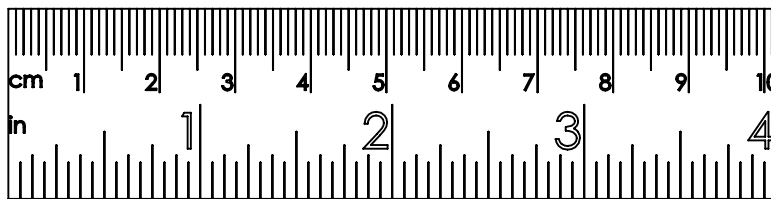

Place spindle here

## Deadbolt screw selection

1. Over lay screws on top of the image.
2. Select the screws that match your door thickness.

### Door thickness

