


Motion sensor:



You can slide open the sliders to maximize the detection range.
(zero detection at 0°, max detection at 75°)

You can adjust the sensitivity dial to increase or decrease the detection sensitivity.

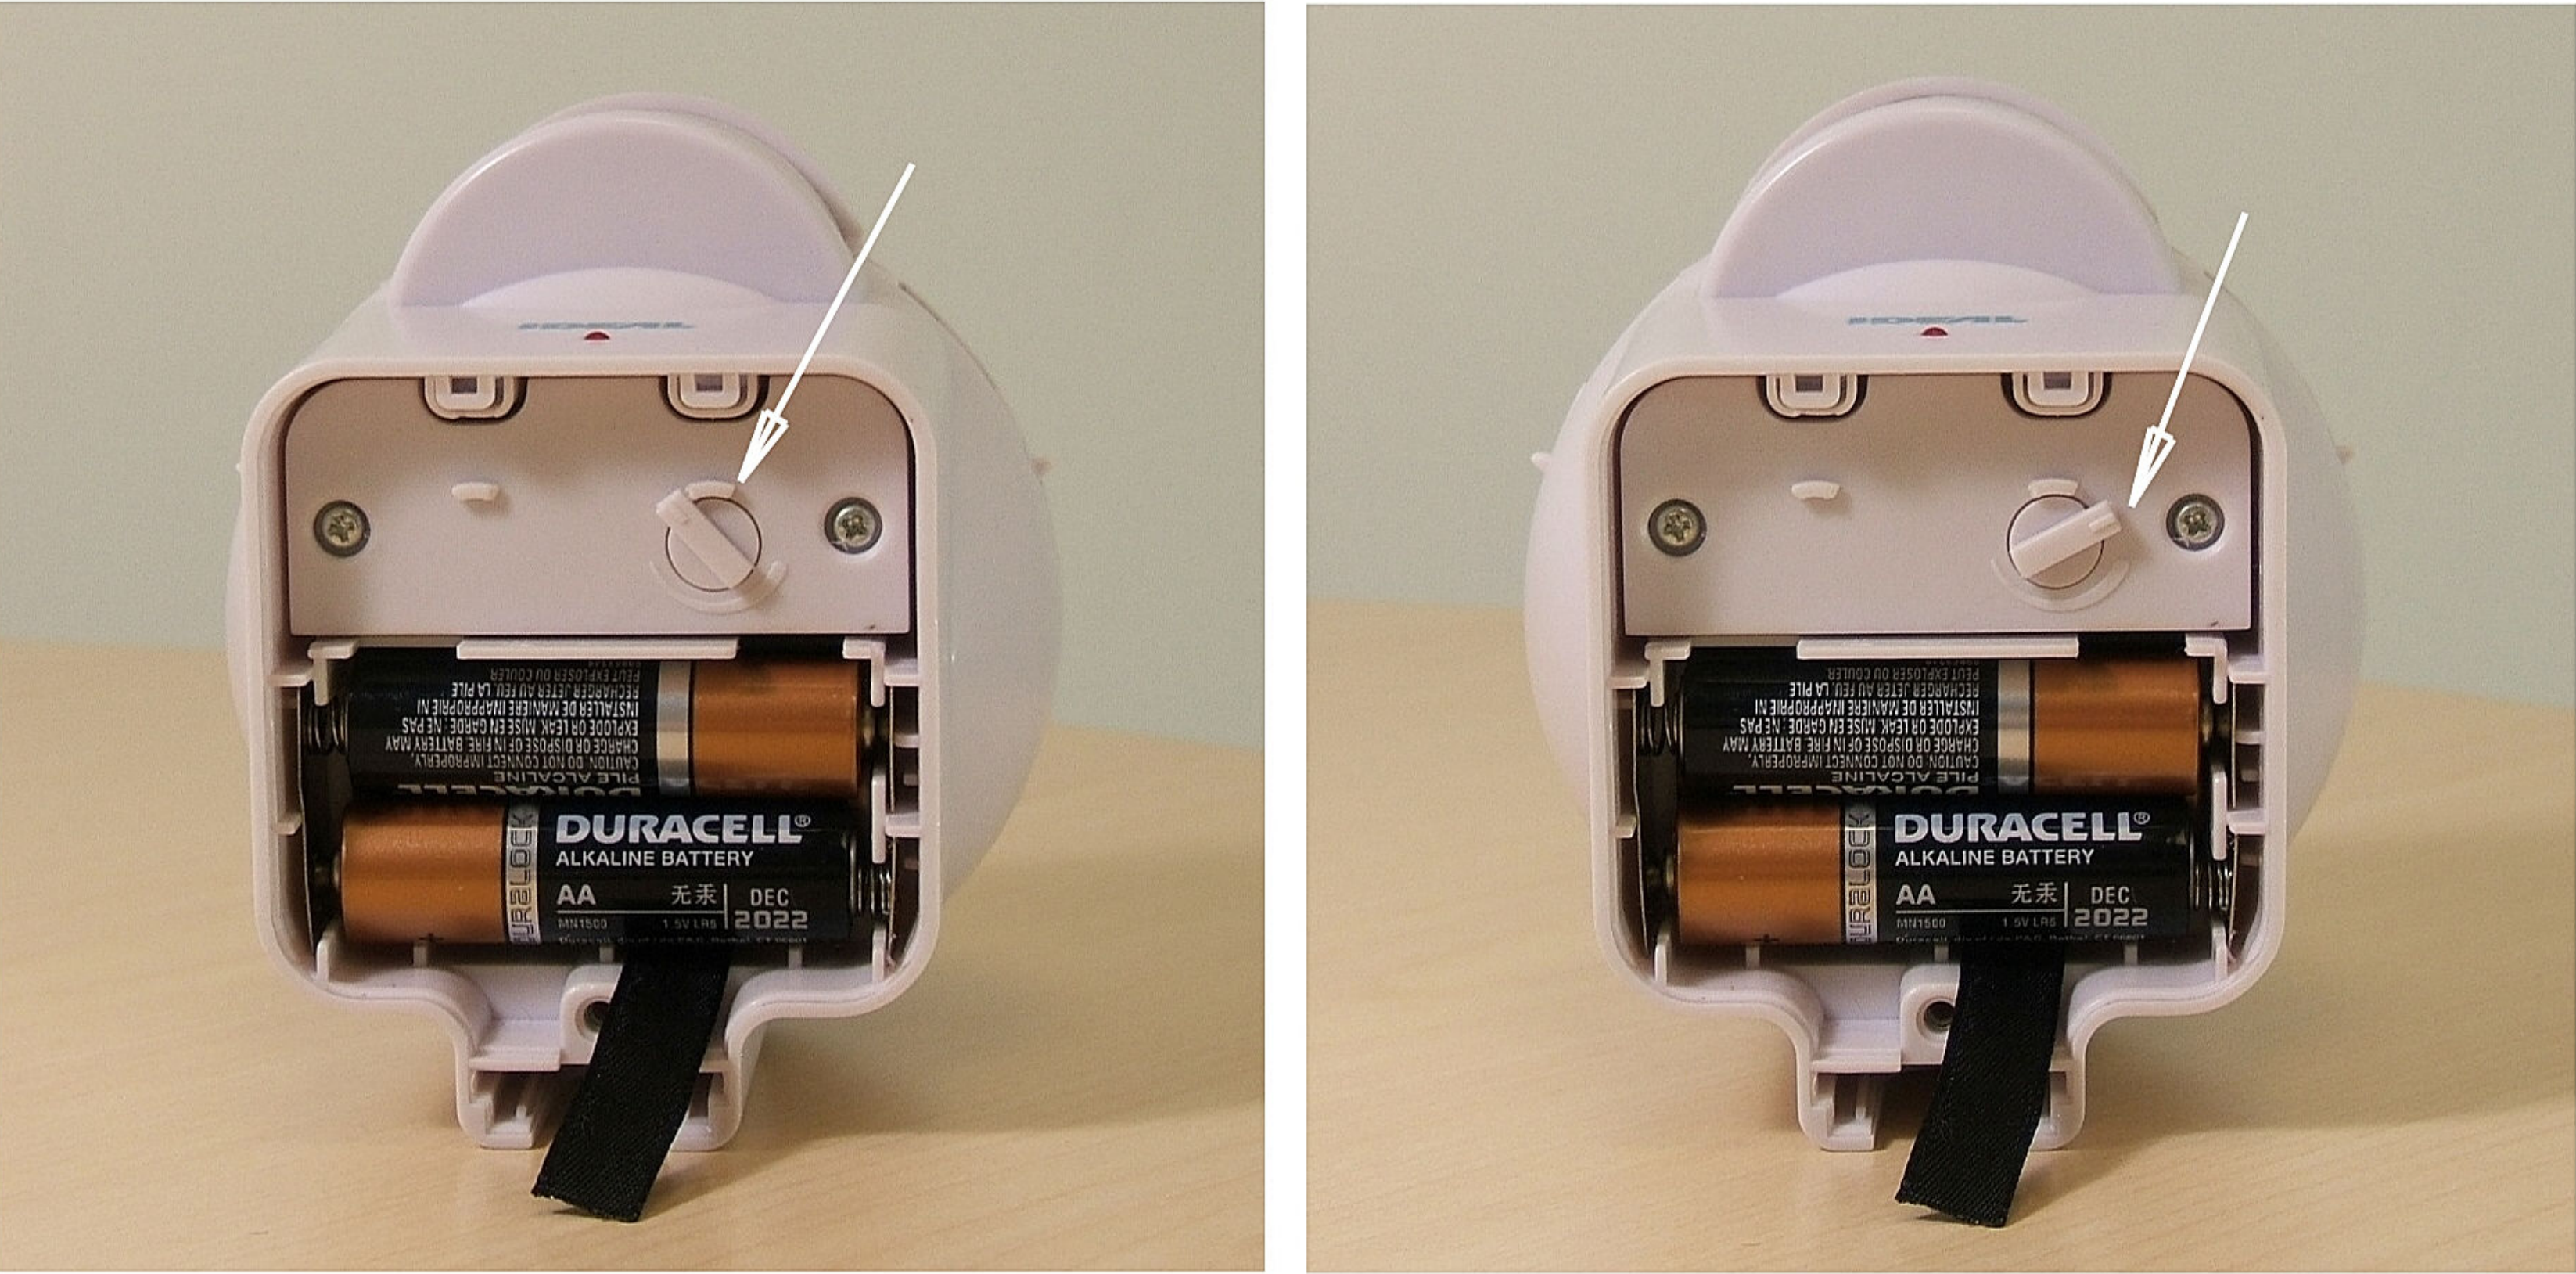

Slim contact:



When installing batteries, drop & push them to the right to lock them into place.

The gap in between the main unit and the magnet shall be less than ¼”, and they shall be flush with each other.

