(720) 420-1731 Denver, CO

PR-4100 FOLDING RACK ASSEMBLY INSTRUCTIONS

PARTS INCLUDED:

2 Uprights
4 Mounting Brackets
4 Folding Support Arms
Pull-Up Bar
2 J-Cups

HARDWARE INCLUDED:

M16x120 Bolt x 4

M16x110 Bolt x 8

Stopper Bolt x 6



1. Get two pieces of wood (2”x10”x56”) - find and mark the studs in your wall and mount the wood to the studs using the power bolts provided.



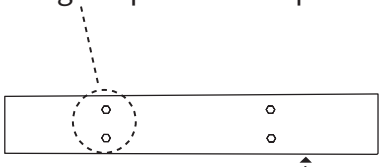

There should be 56” between the two pieces of wood.

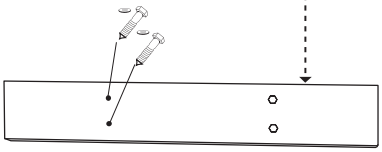

Recommended spacing between the bottom of the lower piece of wood and the ground is 7-8”.

2. Secure mounting brackets on to the wood using the screws.





39.5” between the two inside mounting holes on each piece of wood.

Standard recommended spacing is 64” between the top and bottom brackets however spacing can be modified to accommodate space available.

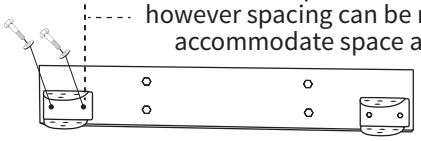

Recommended spacing between the bottom of the bracket and the ground is 9.5”.

3. Attach folding arms to mounting brackets. Feed bolt through the middle, back hole of the mounting bracket.

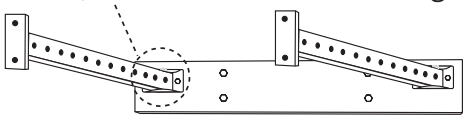



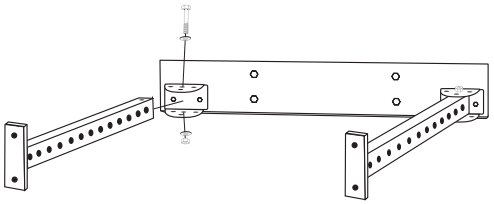

4. Bolt uprights to folding arms. The top bolt will go through the fourth hole from the top and the bottom bolt will go through the fourth hole from the bottom.

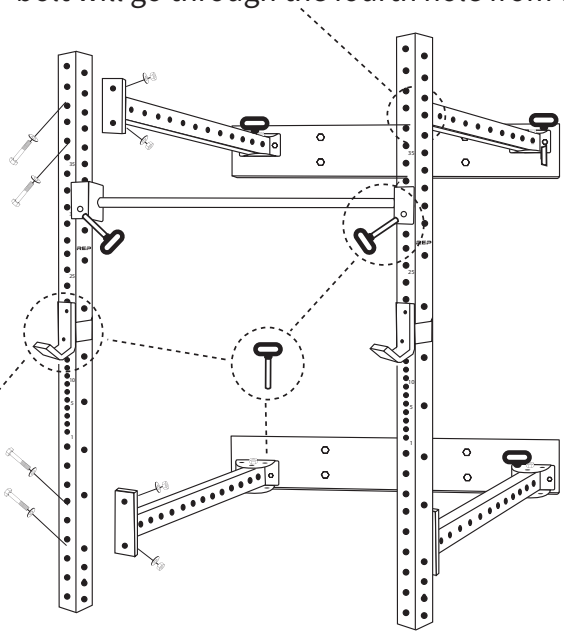



Use pegs to lock rack arms into place and attach pull up bar. Also secure j-cups to appropriate locations.

Any issues? Please contact us directly by phone: 720-420-1731, email: info@repfitness.com or morse code...(.-. . .--. ..-. .. - -. . ...). We are always here for our Customers! - Team REP