




Measuring Instructions

Guidelines For A Perfect Fit

Measure each window individually, as size variances are common. Record width first, then height (also referred to as length) to the nearest 1/8". Measure width from left to right, height from top to bottom, using a steel tape measure. **Do not use a cloth tape.**

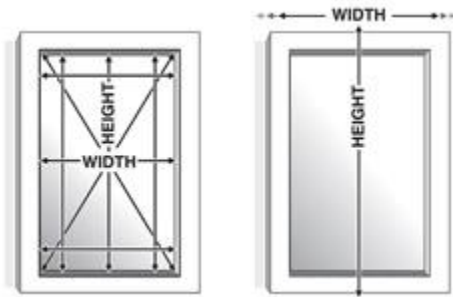

Horizontal Blinds and Shades

Cellular Shades, Pleated Shades, Natural Shades, Roller Shades, Solar Shades, Wood Blinds, Faux Wood Blinds and Horizontal Blinds

Inside Mount

Inside mount blinds and shades are installed inside the window casing. Minimum depth requirements vary by product and headrail type, or by tube size for Solar Shades. See your designer or sales associate for complete details.

1. Measure the exact inside width of window casing from one inside edge to the other in three different places. Record the narrowest measurement.
2. Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement. Solar Shades should be measured at the top only.
3. Do not take any deductions for clearance. The factory will take necessary deductions for a perfect fit.
4. Measure the window diagonally in two places, as shown. If the diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.

Outside Mount

Outside mount blinds and shades are installed outside the window casing, covering an area larger than the window itself.

1. Measure the exact width to be covered. Be sure the measurement overlaps the window opening by at least 1 1/2" on each side (3" total overlap) to ensure light control and privacy.
2. Measure exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
3. The factory makes NO allowances on outside mount.