



PRO-TECT
CONSTRUCTION SUPPLY


faster. safer. smarter.

MAXIAL

Height: Up to 250ft Capacity: 450lbs

KEY FEATURES

- Hoist of choice for expedited Scaffold Erection & Dismantlement for over 20 years
- More efficient use of man power, resulting in less worker fatigue and significant increase in jobsite safety
- Perfect job-site partner for Industrial Boiler Maintenance - Engineered to fit easily through boiler access ports for system scaffold E&D
- Narrow Track System option available for Boiler Access Ports less than 24" wide
- Multi-purpose carrier basket solution delivers materials to the job level after scaffold is in place
- Durable lightweight design that is easy to transport and install with no tools required
- Standard and narrow track systems available
- Customized operational heights available
- Long lasting performance with minimal maintenance required

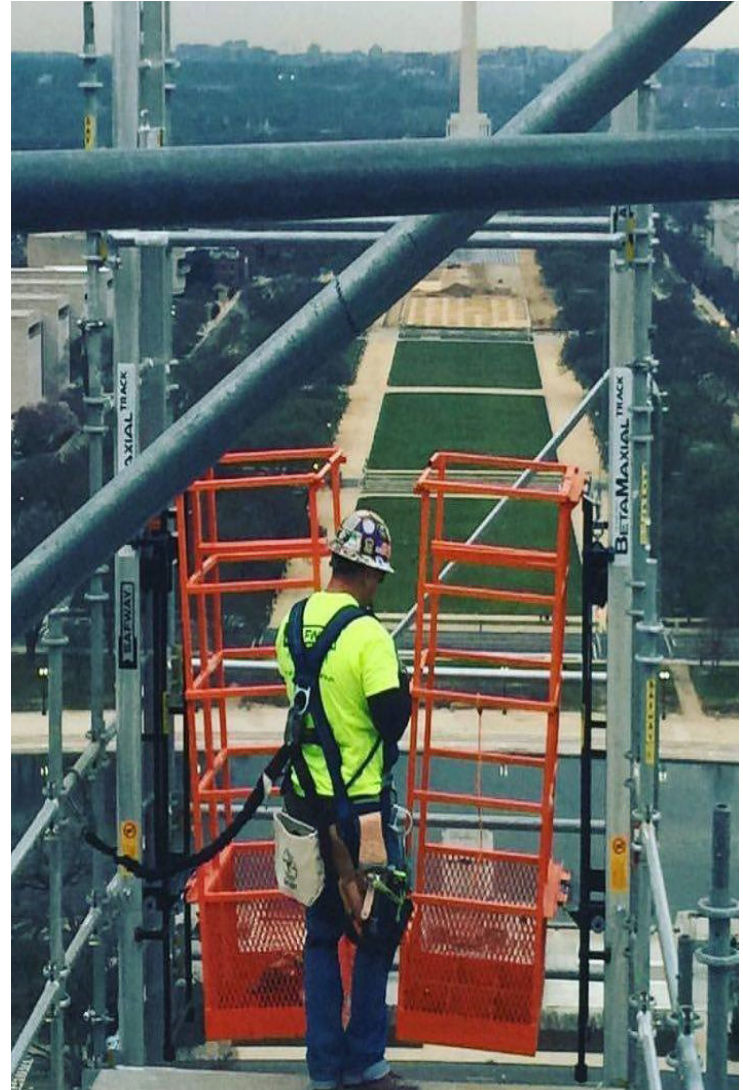

INDUSTRIES SERVED

- **Scaffolding**
- **Construction**
- **Industrial Service Applications**
- **Power Plants**

**CONTACT PRO-TECT CONSTRUCTION SUPPLY
NOW!**

www.protectconstruction.com

425-251-3112

* All Beta Max Hoist Systems meet or exceed ANSI & OSHA specifications. This information is intended to be informative only, and does not constitute a representation or warranty with regard to Beta Max Hoists or any products or services provided. Prices and information are subject to change. Some or all of the renderings in these materials may vary from the actual hoists.

Rev. 05-2016



faster. safer. smarter.

MAXIAL

Height: Up to 250ft Capacity: 450lbs

SPECIFICATIONS

Set Up	
Lift Capacity	450 lbs
Lift Speed	80 fpm
Lift Height*	Up to 250ft
Wire Rope Length	250 ft (1/4" GAC) or 350 ft (3/16" GAC)
A/C Power	110v 30 amp, or 220v 20 amp
Track Width	24" Standard or 15" Narrow

MAXIAL BASKET OPTIONS



**Systems Scaffold
Carrier "XL"**
28" x 22.5" x 72" H
(Fully Assembled)



**Frame Scaffold
Carrier**
66" x 20" x 74"H



Universal Platform
32" x 24" x 64.25H



**CONTACT PRO-TECT CONSTRUCTION SUPPLY
NOW!**

www.protectconstruction.com

(425)251-3112