








Technical Data Sheet: Fasteners and Accessories

Fasteners




Clip Screw					
Name		SKU #	Material	Length	Diameter
Clip Screw for Steel Furring		B885116	Stainless Steel 410	16mm (5/8")	4.6mm (3/16")
Clip Screw for Steel Studs through Sheathing		B885130	Stainless Steel 410	30mm (1-3/16")	4.6mm (3/16")
Clip Screw for Wood		B881135	Stainless Steel 410	35mm (1-3/8")	4.1mm (#8, 5/32")
Clip Screw for Wood Long		B88553	Stainless Steel 410	55mm (2-3/16")	4.6mm (3/16")

Face Fasteners					
Name		SKU #	Material	Length	Diameter
Face Nail for Wood Long (Ringshank)		B8765R400	Stainless Steel 304 with painted coating	65 mm (2-9/16")	3.0 mm (1/8")
Face Screw for Steel Studs through Sheathing		B885245	Stainless Steel 410	45mm (1-49/64")	4.6mm (3/16")
Face Screw for Steel Studs through Sheathing		B885260	Stainless Steel 410	60mm (2-23/64")	4.6mm (3/16")



*Pre-drill CERACLAD panel with drill bit 1mm smaller than diameter of the face fasteners. This helps to prevent panel cracking and chipping.

Accessories




Clips

Name	Photo	SKU #	Material	Dimensions	Depth
Panel Clip		B10115	Hot dip ZAM™ coated steel	w: 66mm (2-5/8") h: 60mm (2-3/8")	15mm (5/8")
Corner Clip		B10153	Hot dip ZAM™ coated steel	w: 44mm (1-3/4") h: 50mm (2")	15mm (5/8")
Long Clip (High wind- see ESR 1627)		B10155	Hot dip ZAM™ coated steel	l: 3018mm (118 13/16") h: 40mm (1-37/64")	15mm (5/8")


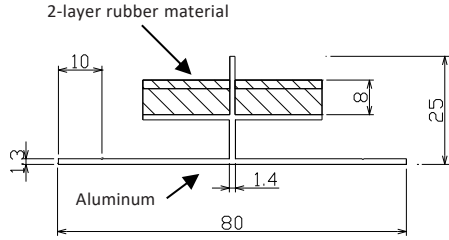
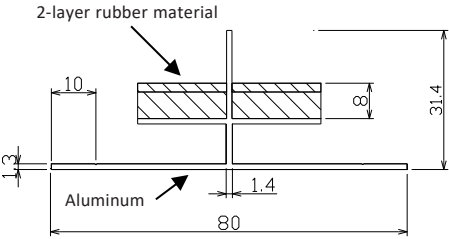
Starter Bars

Name	Photo	Profile	SKU #	Material	Dimensions	Depth
Horizontal Starter Bar			B101152	Hot dip ZAM™ coated steel	h: 30mm (1-3/16") l: 3030mm (10 ft) t: 0.8mm	15mm (5/8")
Vertical Starter Bar			B10157HG	Hot dip zinc/aluminum coated steel with a polyester paint finish	h: 35.6mm (1-3/8") l: 3030 mm (10ft) t: 0.8mm	15mm (5/8")








Caulking Joiner Bars

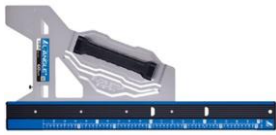

Name	Photo	Profile and dimensions	SKU #	Material
Horizontal Joiner (Standard, Double Flange)	 1-15/16" W x 10' L x 13/16" D	 t = 0.3mm l = 3030mm	B2722	Hot dip ZAM™ coated steel
Horizontal Joiner *(Single Flange)	 2-1/8" W x 10' L x 3/4" D	 t = 0.3mm l = 3030mm	B2719K	Hot dip ZAM™ coated steel
Vertical Joiner	 2-1/8" W x 10' L x 1/4" D	 t = 0.3mm l = 3030mm	B2713K	Hot dip ZAM™ coated steel

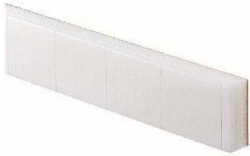
*The Horizontal Joiner (Single Flange) is intended for use only around openings, inside corners, and Ceraclad pre-formed corners (2 per corner). Please use the Standard Double Flanged Horizontal Joiner at all other field panel joints.

Caulk – Free Joiner Bars **				
Name	Photo	Profile and dimensions	SKU #	Material
L Joiner Color Match Options Available**		L = 3000mm t=1.2mm 	B3616KF4	Aluminum
Gasket Joiner For Horizontal running bond application Available in three lengths: 1: L=490mm 2: L=945mm 3: L=1400mm		L1= 490mm L2= 945mm L3= 1400mm t=1.2mm 	L1: SKU# B3711F4 L2: SKU# B3721F4 L3: SKU# B3731F4	- Aluminum Color Gray - Foam: ➤ Upper layer EPDM ➤ Lower layer Repellent polyurethane
Gasket Joiner Flush For Horizontal running bond application with extended tip leg Available in three lengths: 1: L=490mm 2: L=945mm 3: L=1400mm		L1= 490mm L2= 945mm L3= 1400mm t=1.2mm 	L1: SKU# B3711TF* L2: SKU# B3721TF* L3: SKU# B3731TF* *Color: 1:Black 2:White 4:Gray	- Aluminum - Foam: ➤ Upper layer EPDM ➤ Lower layer Repellent polyurethane

**Please Contact Ceraclad Team for More Information on available metal trim options at technical@ceraclad.com

Metal Flashings			
Base/Sill Flashing			
Name (SKU)	photo	Material	Places of application
Sill flashing (B2322W1)		Coated galvanized steel (Zn, Al)	Decorative Starter/Base Flashing
	5 pieces/box		
Outside Corner (B2322W1D)		Coated galvanized steel (Zn, Al)	Outside corner of sill
	4 pieces/box		
Inside Corner (B2322W1C)		Coated galvanized steel (Zn, Al)	Inside corner of sill
	4 pieces/box		
End Cap (B2322W1E)		Coated galvanized steel (Zn, Al)	Edge of the flashing
	1 set/box		
Overhang/Soffit Flashing			
Overhang flashing (B243W1)		Coated galvanized steel (Zn, Al)	Wall-to-soffit intersection at overhangs
	4 pieces/box		
Outside Corner (B243W1D)		Coated galvanized steel (Zn, Al)	Outside corner of the overhang
	2 piece/box		
Inside Corner (B243W1C)		Coated galvanized steel (Zn, Al)	Inside corner of the overhang
	2 pieces/box		
End Cap (B243W1E)		Coated galvanized steel (Zn, Al)	Edge of the overhang flashing
	2 pieces/bag		
Joint Piece (B243W1J)		Coated galvanized steel (Zn, Al)	For use at flashing joints
	2 pieces/bag		

Cutting Accessories				
Name		Profile and dimensions	SKU #	Material
Cutting Guide		Dimensions: 745mmX303mmX82mm Scale: Meter scale 620mm Squareness: within ± 0.60 mm per 600mm Product weight: 910g	B49311	Main Body : Aluminum Guide and rivet: Stainless Steel Grip: ABS + elastomer resin Anti-slip rubber: EPDM
Cutting Blade		Arbor: 5/8" Diameter: 7-1/4" Thickness: 1.6mm Teeth: 10	B49321	Cutting edge: Diamond tip Main body: 65Mn

Name		SKU #	Material	Unit of Measurement
Spacer Block (15mm) Self-Adhered		RY82S15	Polypropylene and Polyethylene	6 Strips per box: l:1000mm (3'-3/8") 132 blocks per box Each Block: w: 45mm h: 40mm d: 15mm(5/8")
Repair Putty Kit		B4901	Non-shrinking Polymer	350 g/Kit
Cut Edge Sealer		LTKBM3103C	AlkoxySilane	37.5 oz 1.11 liter