


SPECIFICATIONS


PPF:	> 1944 $\mu\text{mol/s}$
Efficacy:	> 2.7 $\mu\text{mol/J}$
Input Power:	720 W
Power Factor:	$\geq 96\%$
Fixture Dimensions/Weight:	45.24"L x 4.36" W x 6.46" H / 22.33lbs
Mounting Height:	> 2.5ft Above Canopy
Lifetime:	L90: > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277V
Amp Draw:	120V/6.23A, 208V/3.61A 240V/3.09A, 277V/2.71A
IP Rating:	IP66

MODEL-I PLUS (Tested at 2.5 Feet)

AVERAGE PPFD 684

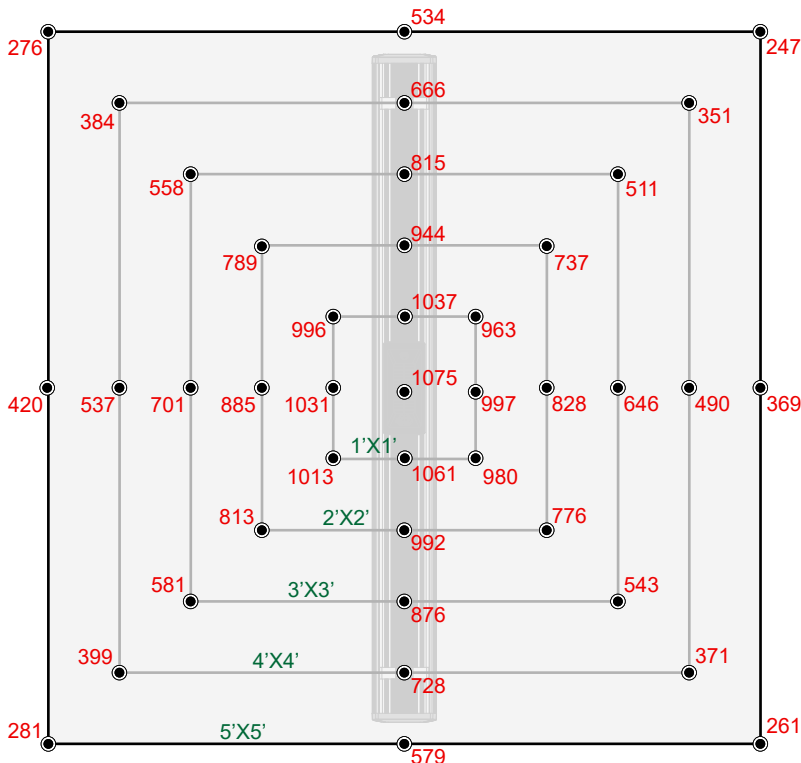

DIMENSIONS

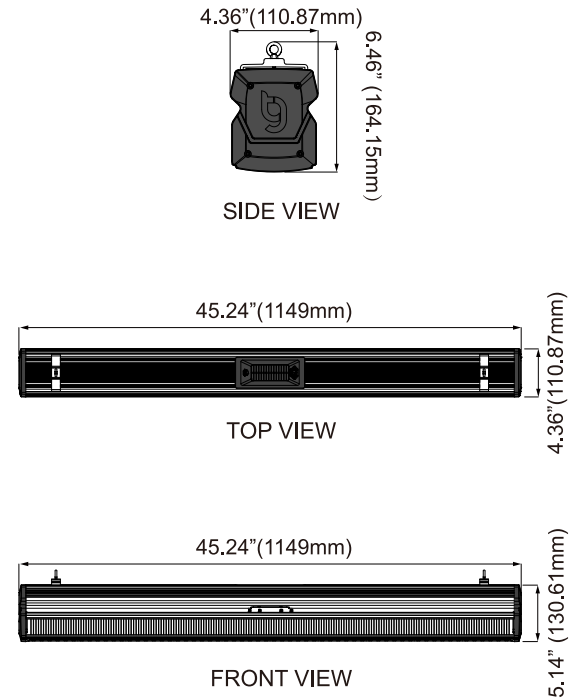


FEATURES

- Outstanding Efficiency
- Slim design with built-in driver
- Innovative V-shape LED panel
- Ultimate controllability on UV, White, Deep Red and Far Red channels
- External control ability
- SAMSUNG LM301B

SPECTRA

Fully Adjustable Spectrum

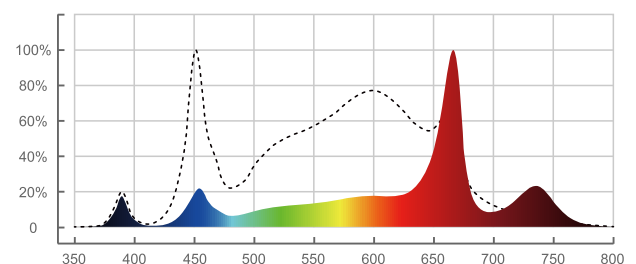


MODEL-I PLUS (480V)

HORTICULTURE LED GROW LIGHT

SPECIFICATIONS


PPF:	1944 $\mu\text{mol/s}$
Efficacy:	2.7 $\mu\text{mol/J}$
Input Power:	720 W
Power Factor:	$\geq 90\%$
Fixture Dimensions/Weight:	45.24"L x 4.36" W x 6.46" H / 22.33lbs
Mounting Height:	> 2.5ft Above Canopy
Lifetime:	L90: >54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 347-480V
Amp Draw:	347V/2.09A, 480V/1.55A
IP Rating:	IP66

DIMENSIONS

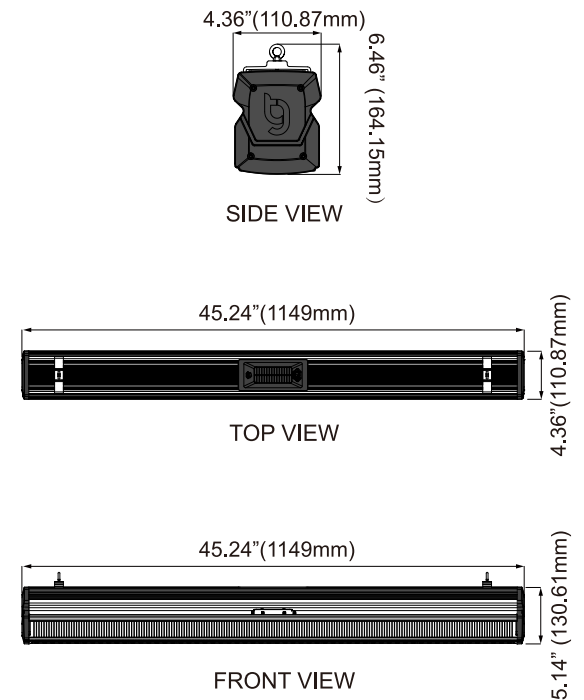

MODEL-I PLUS (480V) (Tested at 2.5 Feet)

AVERAGE PPFD 684

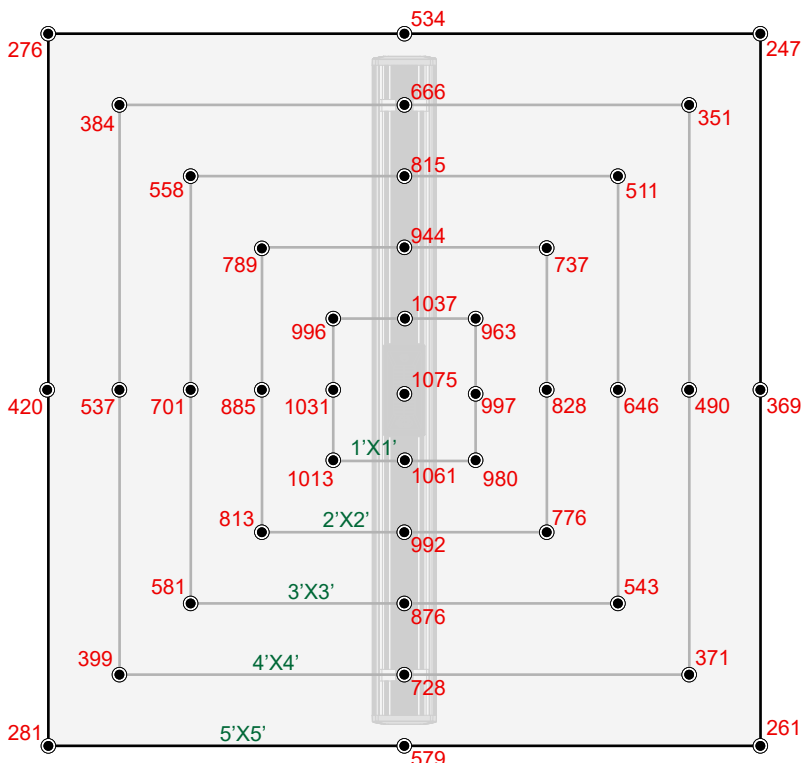

FEATURES

- Outstanding Efficiency
- Slim design with built-in driver
- Innovative V-shape LED panel
- Ultimate controllability on UV, White, Deep Red and Far Red channels
- External control ability

SPECTRA

Fully Adjustable Spectrum

