




Your Solutions Partner

Specifications

F.O.B Sedalia, Missouri 65301

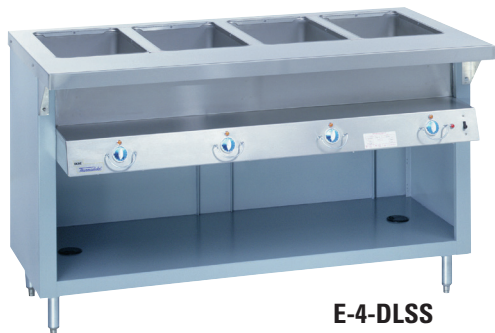

E-4-DLSS

OPTIONS:

- ☐ 14 gauge tops
- ☐ Heated base module
- ☐ Sliding Doors
- ☐ 3-phase wiring
- ☐ Adaptor plates
- ☐ Casters (add cord and plug), 5" swivel with locks
- ☐ Casters (add cord and plug), 5" swivel no lock
- ☐ Veneered panels
- ☐ Powder coat paint colors
- ☐ Foodshields
- ☐ Trayslides
- ☐ 1/2" poly cutting surface added to integral top

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Steamtables Hot Food Units - Electric - Deluxe

- ☐ **E-2-DLPG/E-2-DLSS** 2 top openings
- ☐ **E-3-DLPG/E-3-DLSS** 3 top openings
- ☐ **E-4-DLPG/E-4-DLSS** 4 top openings
- ☐ **E-5-DLPG/E-5-DLSS** 5 top openings
- ☐ **E-6-DLPG/E-6-DLSS** 6 top openings

TOP:

- One piece. 16 gauge, 300 Series stainless steel
- Top openings die-stamped. 12" x 20"
- Integral carving/work surface

HEAT COMPARTMENTS:

- Sealed wells with drains copper manifolds and brass master valve
- 750 watt element at 120, 208 or 240 volt/single or 3-phase
- Robertshaw thermostat w/indicator light per section
- Master toggle switch w/indicator light - entire unit
- 12" x 20" stainless steel liner, 6-1/2" deep

BODY AND INTERIOR SHELF:

- ☐ 300 Series stainless steel or paint grip steel
- End panels
- 6" polished stainless steel adjustable legs

INTEGRAL DISHSHELF:


- Heavy gauge, one piece stainless steel - 8-1/2" wide
- Housing for control knobs, thermostats and master switch
- Wire knob guards

SHORT FORM SPECIFICATIONS:


Thurmaduke® Steamtables - Hot Food - Electrical - Deluxe.

Top shall be 16ga, 300 series Stainless Steel flanged down edges, flush at ends, integral s/s cutting board, dish shelf, 20ga s/s body & under shelf, with 15-1/2" opening for storage, s/s sealed well pan openings to be 12" x 20" x 6-1/2" deep, die-stamped, drains, copper manifolds, one valve, Robertshaw thermostats, unit wired to master toggle w/ indicator, 6" Stainless adjustable legs.


Thurmaduke®

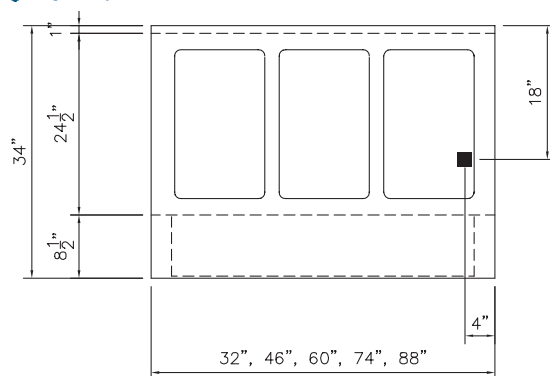

TOP VIEW

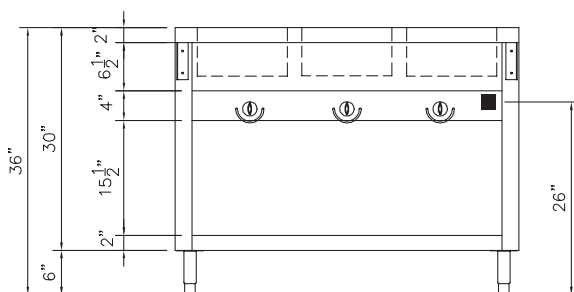

FRONT VIEW



RIGHT SIDE VIEW

MODEL:**Thurmaduke® Steamtables
Hot Food Units - Electric - Deluxe**

- ☐ **E-2-DLPG/E-2-DLSS** 2 top openings
- ☐ **E-3-DLPG/E-3-DLSS** 3 top openings
- ☐ **E-4-DLPG/E-4-DLSS** 4 top openings
- ☐ **E-5-DLPG/E-5-DLSS** 5 top openings
- ☐ **E-6-DLPG/E-6-DLSS** 6 top openings

LEGEND

▲ - ELECTRICAL CONNECTION

● - DRAIN LOCATION

DIMENSIONS:

FREIGHT CLASS: 150

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in.	cm	in.	cm	in.	cm			lbs.	kg
E-2-DLPG	E-2-DLSS	32	81.3	34	86.4	36	91.4	2	27.0	255	115.9
E-3-DLPG	E-4-DLSS	46	116.8	34	86.4	36	91.4	3	38.1	335	152.3
E-4-DLPG	E-4-DLSS	60	152.4	34	86.4	36	91.4	4	49.2	410	186.4
E-5-DLPG	E-5-DLSS	74	188.0	34	86.4	36	91.4	5	60.2	495	225.0
E-6-DLPG	E-6-DLSS	88	223.5	34	86.4	36	91.4	6	71.3	595	270.5

ELECTRICAL SPECIFICATIONS:

Model	120 Volt - 750 watt elements			208 Volt - 750 watt elements			240 Volt - 750 watt elements		
	Watts	Amps	NEMA	Watts	Amps	NEMA	Watts	Amps	NEMA
E-2-DLPG/SS	1500	12.5	5-15	1500	7.2	6-20	1500	6.4	6-20
E-3-DLPG/SS	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20
E-4-DLPG/SS	3000	25.0	5-50	3000	14.4	6-20	3000	12.5	6-20
E-5-DLPG/SS	3750	31.3	5-50	3750	18.0	L6-30	3750	15.9	6-20
E-6-DLPG/SS	N/A			4500	21.6	L6-30	4500	18.8	L6-30

Cord and NEMA plug NOT included



Your Solutions Partner

DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

05/11
Printed in U.S.A.
© 2011, Duke Manufacturing Co.