


Proudly Made in the USA

# Tulsa Rig Iron TT-150



Tulsa Rig Iron  
4457 West 151st  
Street South  
PO Box 880  
Kiefer, OK 74041  
918.321.3330  
info@tulsarigiron.com  
www.tulsarigiron.com

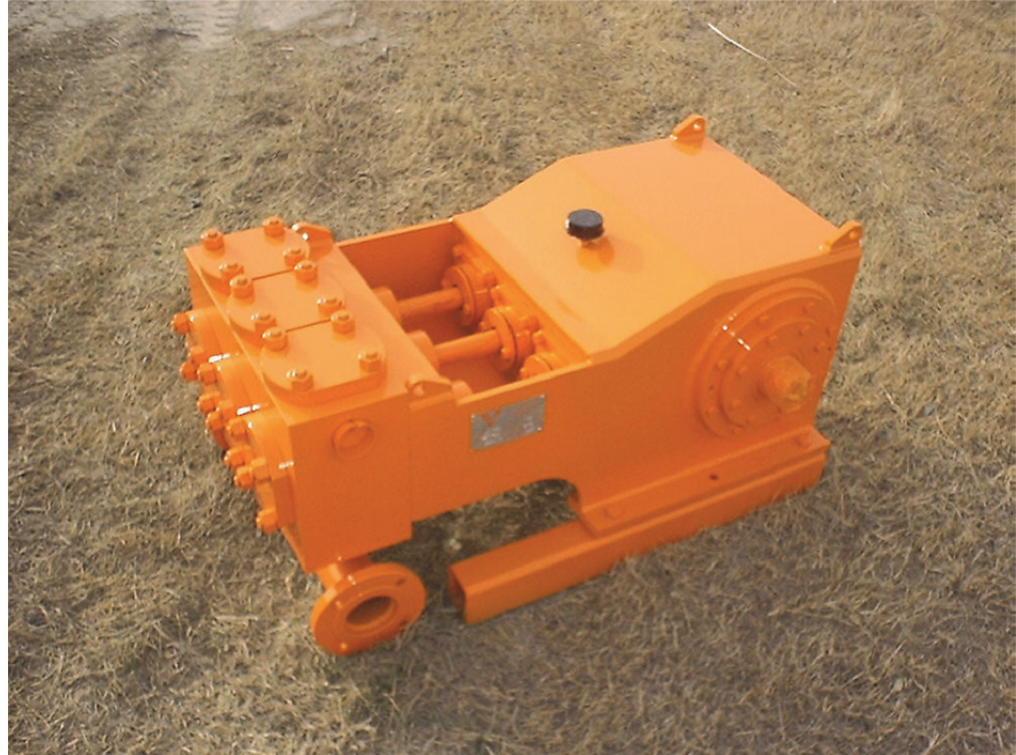

## TT-150 Triplex Pump

### Designed For Demanding Pumping Applications

3" Stroke  
150 GPM Continuous Duty Rated

### Recommended Uses

- Pressure Testing
- Chemical Water Injection
- All Drilling Applications
- Industrial Applications
- Well Servicing

**TT-150 - 3" Stroke - 175 hp - Continuous Duty**

Strokes per Minute			500	450	400	350	300	250	200	150	100	50
Piston Size	Liner Size	Output Gal/Rev	Output Gallons per Minute/Pressure PSI									
-	3.5"	0.375	<b>188</b>	<b>169</b>	<b>150</b>	<b>131</b>	<b>113</b>	<b>94</b>	<b>75</b>	<b>56</b>	<b>38</b>	<b>19</b>
			1435	1560	1560	1560	1560	1560	1560	1560	1560	1560
3"	3"	0.274	<b>137</b>	<b>123</b>	<b>110</b>	<b>96</b>	<b>82</b>	<b>69</b>	<b>55</b>	<b>41</b>	<b>27</b>	<b>14</b>
			1970	2125	2125	2125	2125	2125	2125	2125	2125	2125
2.5"	2.5"	0.191	<b>96</b>	<b>85</b>	<b>76</b>	<b>67</b>	<b>57</b>	<b>48</b>	<b>38</b>	<b>29</b>	<b>19</b>	<b>10</b>
			2812	3055	3055	3055	3055	3055	3055	3055	3055	3055
2"		0.122	<b>61</b>	<b>55</b>	<b>49</b>	<b>43</b>	<b>37</b>	<b>31</b>	<b>24</b>	<b>18</b>	<b>12</b>	<b>6</b>
			4425	4775	4775	4775	4775	4775	4775	4775	4775	4775

- Based on 100% volumetric efficiency and 90% mechanical efficiency
- Standard 5,000 psi fluid end
- For intermittent applications at higher pressure contact Tulsa Rig Iron
- Pump only: 1,650 lbs. 45" L x 24.5" W x 22.5" H

### Options and Usage

#### Options:

- Bare Pump Only
- Pump with Chainbox
- Complete Skidded Pump Package

#### Used Often For:

- Horizontal Directional Drilling
- Reverse Circulation
- Hydrostatic Testing
- Water Blast
- Workover Applications

Utilizing roller bearings throughout, our pumps are built to last! They are designed to be easily maintained and are capable of being completely rebuilt.

Our TT-150 boasts flow rates and pressures of pumps twice its size, making it an ideal choice for applications where size and weight are of concern.