

Control Panel Safety Latch Operation

Since items located within the main electric control panel operate on 480 volts, we have designed a safety latch to prevent tampering by unauthorized persons. In the normal locked position, the safety mechanism slot (Fig. 1) sits horizontally. There are no keys required, simply use a flat blade screwdriver, knife, or coin to turn the slot counter-clockwise 90 degrees into the vertical position. When the slot is held oriented vertically, press the spring loaded handle insert (Fig. 2) which allows turning the black handle counter-clockwise to open the doors.



Fig. 1

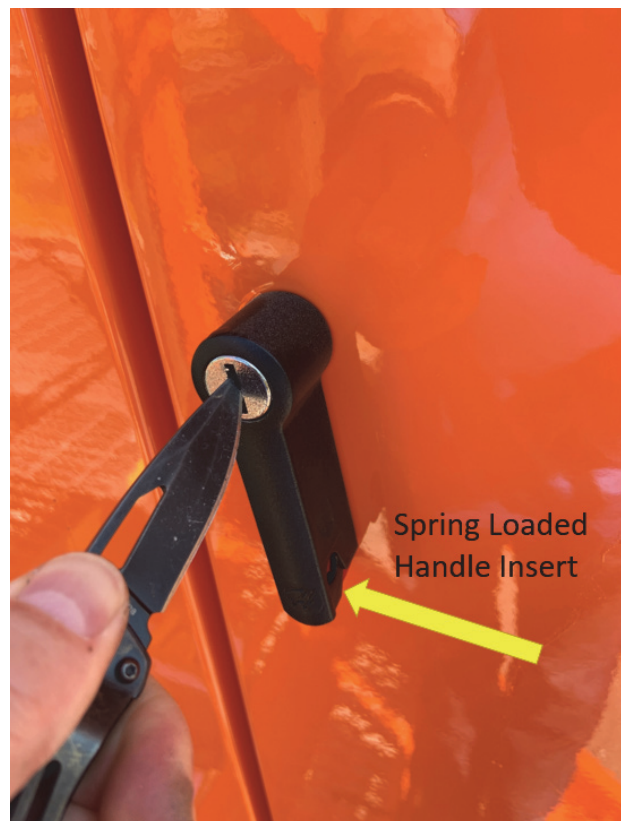


Fig. 2