



Brisa 2000

Designed in 2000



shown in Polished Copper
with wood blades



shown in
Textured Bronze
with wood blades

Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.

Current specification sheets can be found at MatthewsFanCo.com. (01_2018)



Standard Finishes



Special Order
Finishes

Brisa 2000

TECHNICAL SPECIFICATIONS

FAN SPECIFICATIONS

Fan Head Options	Solid Mahogany Wood ¹	Metal with Guard
Fan Diameter	40 inches / 102 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines ²
Blade Pitch	19°	31°
CFM	2376	1265
Watts	52.44	55.15
CFM / Watt	45.31	22.94
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	10 inches / 25 cm + downrod length	
Wall Control	Lutron decora-style SFS-5E fully variable	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Flat ceiling canopy

Lutron decora-style
SFS-5E variable wall
switch in white



OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE


Ceiling Height	Downrod Lengths Field cuttable Non-threaded
10 ft or less	5 inches / 13 cm <i>Use safety cage if applicable</i>
10 - 12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

SKU NAMING CONVENTION

SKU#	B2K-XX-XXX (Model+Finish+Fan Blade)
Standard Finishes	Black — BK
	Bronze — BZ
	Bronzette — BZZT
	Brushed Nickel — BN
	Polished Chrome — CR
Special Order	Polished Copper — CP
	Brushed Brass — BRBR
	Polished Brass — PB
	Brushed Copper — BRCP
	Polished Chrome Damp - CRDAMP
	Brushed Nickel Damp - BNDAMP
	Gloss White — WH
	Agua Marinha — LTBLUE
	Safira — BLUE
	Ametista — LTPURPLE
	Ouro — GOLD
	Jade — LTGREEN
	Esmeralda — GREEN
	Citrino — ORANGE
	Rubi — RED
	Black Nickel — BKN
Fan Blade	Wood Blade — WD
	Metal Blade — MTL

¹ Matthews' Brazilian mahogany is ecologically harvested.

² Safety cages with tight tines are for use in low ceiling applications: 7 ft in USA and 8.2 ft in Canada

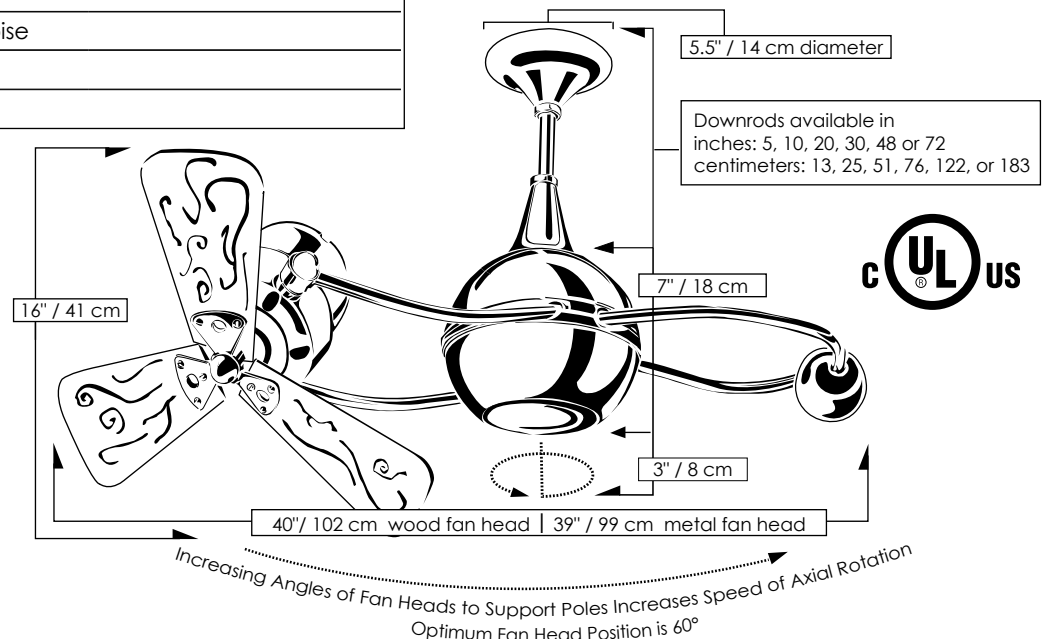

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2017 Matthews Fan Company. All rights reserved.