




Vent-Bettina

Designed in 2002

shown in Brushed Nickel
with wood blades



Safety cage
compatible



Proudly assembled
with
American labor




Handmade



shown in Polished Chrome
with metal blades and
safety cage

The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.

Current specification sheets can be found at MatthewsFanCo.com. (01_2018)

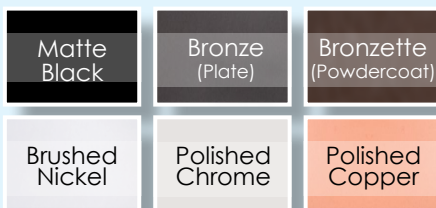

Standard Finishes



Special Order
Finishes

FAN SPECIFICATIONS

Fan Head Options	Solid Mahogany Wood ¹	Metal with Guard
Fan Diameter	44 inches / 112 cm	42 inches / 107 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines ²
Blade Pitch	19°	31°
CFM	3293	2077
Watts	87.32	89.63
CFM /Watt	37.71	23.17
Fan Weight	19 lbs	
Voltage	110 or 220	
Motor Type	AC	
Downrods Lengths Field cuttable. Non-threaded	inches: 10, 20, 30, 48, 72 centimeters: 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	7 inches / 18 cm + downrod length	
Wall Control	Lutron decora-style SFS-5E fully variable	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Flat ceiling canopy

Lutron decora-style
SFS-5E variable wall
switch in white



OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE


Ceiling Height	Downrod Lengths Field cuttable Non-threaded
10 ft or less	10 inches / 25 cm <i>Use safety cage if applicable</i>
10 - 12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

SKU NAMING CONVENTION

SKU#	VB-XX-XXX (Model+Finish+Fan Blade)
Standard Finishes	Black — BK Bronze — BZ Bronzette — BZZT Brushed Nickel — BN Polished Chrome — CR Polished Copper — CP
Special Order	Brushed Brass — BRBR Polished Brass — PB Brushed Copper — BRCP Polished Chrome Damp - CRDAMP Brushed Nickel Damp - BNDAMP Gloss White — WH Agua Marinha — LTBLUE Safira — BLUE Ametista — LTPURPLE Ouro — GOLD Jade — LTGREEN Esmeralda — GREEN Citrino — ORANGE Rubi — RED Black Nickel — BKN
Fan Blade	Wood Blade — WD Metal Blade — MTL

¹ Matthews' Brazilian mahogany is ecologically harvested.

² Safety cages with tight tines are for use in low ceiling applications: 7 ft in USA and 8.2 ft in Canada

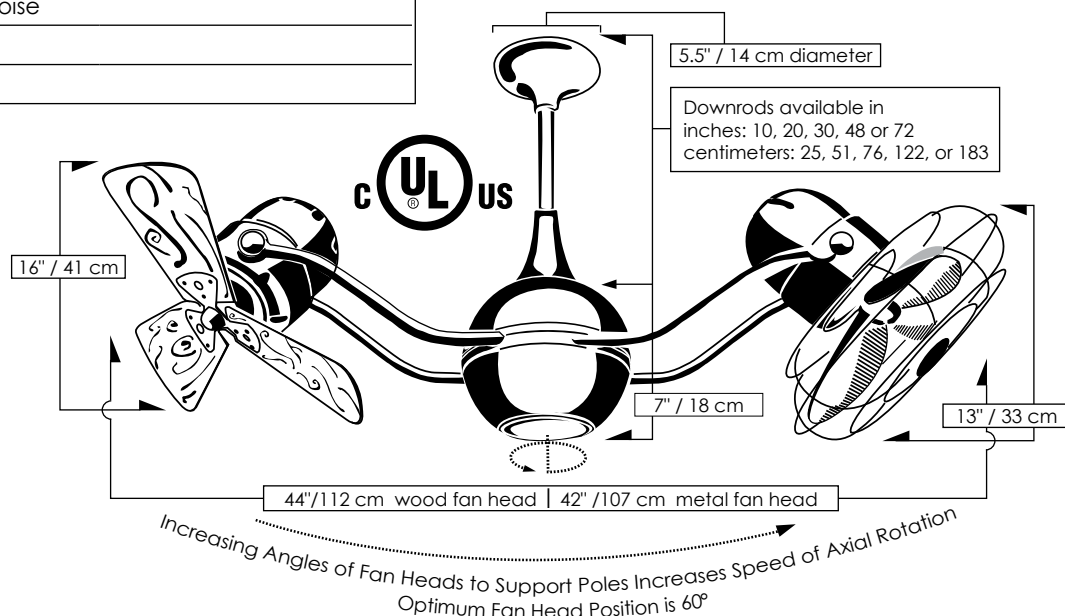

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2017 Matthews Fan Company. All rights reserved.