



Submitted Model No.:

Specific Features:



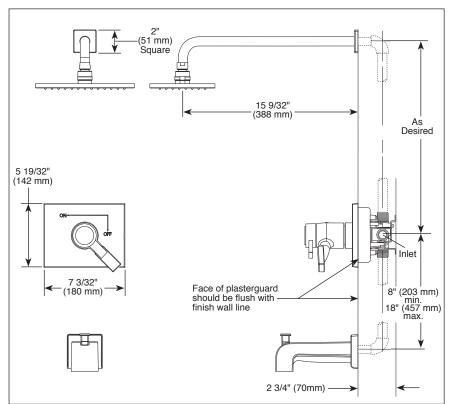

▲ Designate Proper Finish Suffix



DELTA

TUB AND SHOWER JETTED SHOWER™

- Vero[®] Bath Collection TempAssure[®] Thermostatic
- Valve Only Trim (T17T053 Series)
- Shower Only Trim (T17T253 & T17T253-WE Series)
- Tub/Shower Trim (T17T453 & T17T453-WE Series)

STANDARD SPECIFICATIONS:


- TempAssure® 17T thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6°F.
- Must also order Multi-Choice® Universal rough separately (R10000).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit rotation into hot water zone.
- 2.5 gpm @ 80 PSI for standard models and 2.0 gpm @ 80 PSI for models with -WE suffix.
- All parts are replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- Available extension kit (RP75136) adds up to 1 3/8" installation depth.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1- Valve control only.





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2016 Masco Corporation of Indiana