

SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	

LEAD-FREE CURB STOP

T-5500NL

Lead-free design is suitable for all no-lead potable water installations, in full compliance of the lead-free plumbing law.

90-degree operation with enclosed operating head stops.

Operating head has been drilled to accept stationary rod cotter pin attachment.

Full-port, ball-and-seat design is superior to plug-type designs.

Durable, Teflon*-coated ball assures positive, bubble-tight shutoff, low torque operation and long service life.

For underground water service installations only, to permit shutoff of the water supply, from the water main to the building.

Available in NPT nominal sizes 3/4" through 2".

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP): 300 psi - 100°F Max



Pictured:
Model T-5500NL

- Third-party tested and certified in compliance with U.S. Federal Public Law 111-380 (National lead-free plumbing law).
- Certified lead-free and in compliance with NSF 372 lead content requirements.
- Manufactured to AWWA C800 specifications.
- Female pipe thread connections comply with ANSI/ASME B1.20.1




MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	Lead-free cast bronze	ASTM B584 - UNS C89836
2 Seats (2)	Buna-N (NBR) nitrilic rubber	Commercial grade
3 Operating head and stem	Lead-free cast bronze	ASTM B584 - UNS C89836
4 Stem O-rings (2)	Buna-N (NBR) nitrilic rubber	Commercial grade
5 Stem locknut	Lead-free cast bronze	ASTM B584 - UNS C89836
6 Ball	Teflon* coated lead-free cast bronze	ASTM B584 - UNS C89836
7 End adapter	Lead-free cast bronze	ASTM B584 - UNS C89836

*Teflon is a registered trademark of DuPont.

DIMENSIONS

Size	A	B	C
3/4"	1.61	2.82	2.54
1"	1.61	3.41	2.78
1-1/4"	1.61	4.72	2.78
1-1/2"	2.03	4.64	3.45
2"	2.03	5.00	3.83

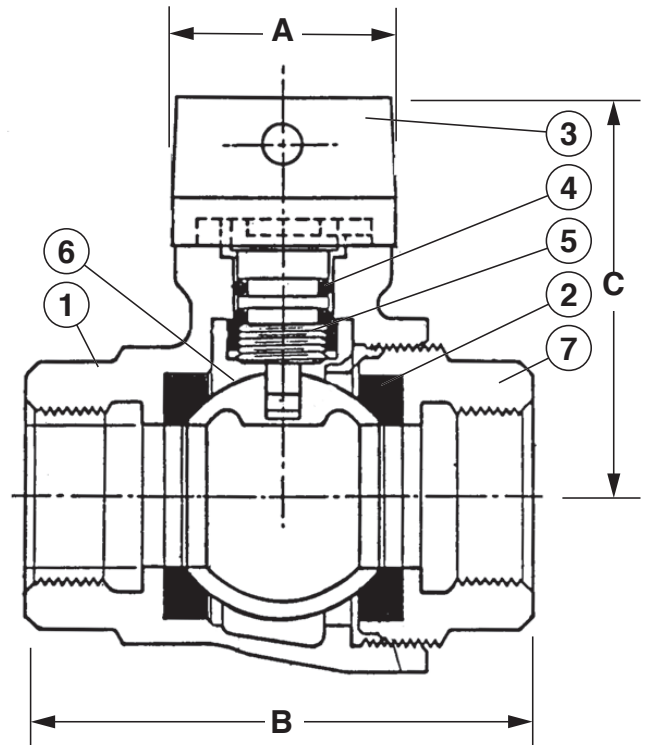

Pictured:
Model T-5500NL
Cut-away