

Ball and Balancing Valve, R20/R25 Thread x 3/4" Copper Adapter

Submittal Information Revision B: Oct. 21, 2009

Project Information

Job Name:

Location:	Part No. Ordered:
Engineer:	Date Submitted:
Contractor:	Submitted By:
Manufacturer's Representative:	Approved By:

Technical Data


Material: CA 360 Brass

Maximum Working Temperature: 250°F (121°C)

Maximum Working Pressure: 250 psi (17 bar)

Product Information and Application Use

The Uponor Ball and Balancing Valves include ¾" copper adapters and feature in-line isolation valves.

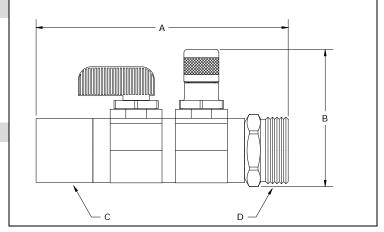

✓	Description	Part Number	Α	В	С	D	Weight
	Ball and Balancing Valve, R20 Thread x ¾" Copper Adapter	A5902075	4.00"	2.13"	¾" Copper	R20	0.83 lbs.
	Ball and Balancing Valve, R25 Thread x ¾" Copper Adapter	A5902575	4.10"	2.30"	¾" Copper	R25	0.50 lbs.

Installation

Install valve according to local building code. Do not dismantle. If soldering, aim flame away from fitting. For more information, refer to the AquaPEX® Professional Plumbing Installation Guide or Radiant Floor Installation Handbook.

Standards

CSA 137.5; B125; ASTM F877; ASTM F1960; ASME A112.18.1

Codes

UPC

Listings

NSF 61- and 9-certified

Related Applications Contact Information

PEX-a Plumbing Systems Radiant Heating and Cooling Systems Snow and Ice Melting Systems Permafrost Protection Systems Turf Conditioning Systems Uponor, Inc. 5925 148th Street West Apple Valley, MN 55124 USA Phone: (800) 321-4739 Fax: (952) 891-2008 www.uponor-usa.com Uponor Ltd. 2000 Argentia Rd., Plaza 1, Ste. 200 Mississauga, ON L5N 1W1 CANADA Phone: (888) 994-7726 Fax: (800) 638-9517 www.uponor.ca