


Statistics					
Description	Symbol	Avg	Max	Min	Avg/Min
Area Calc	+	1.5 fc	7.5 fc	0.1 fc	15.0:1
Property Boundary	+	0.5 fc	2.8 fc	0.0 fc	N/A

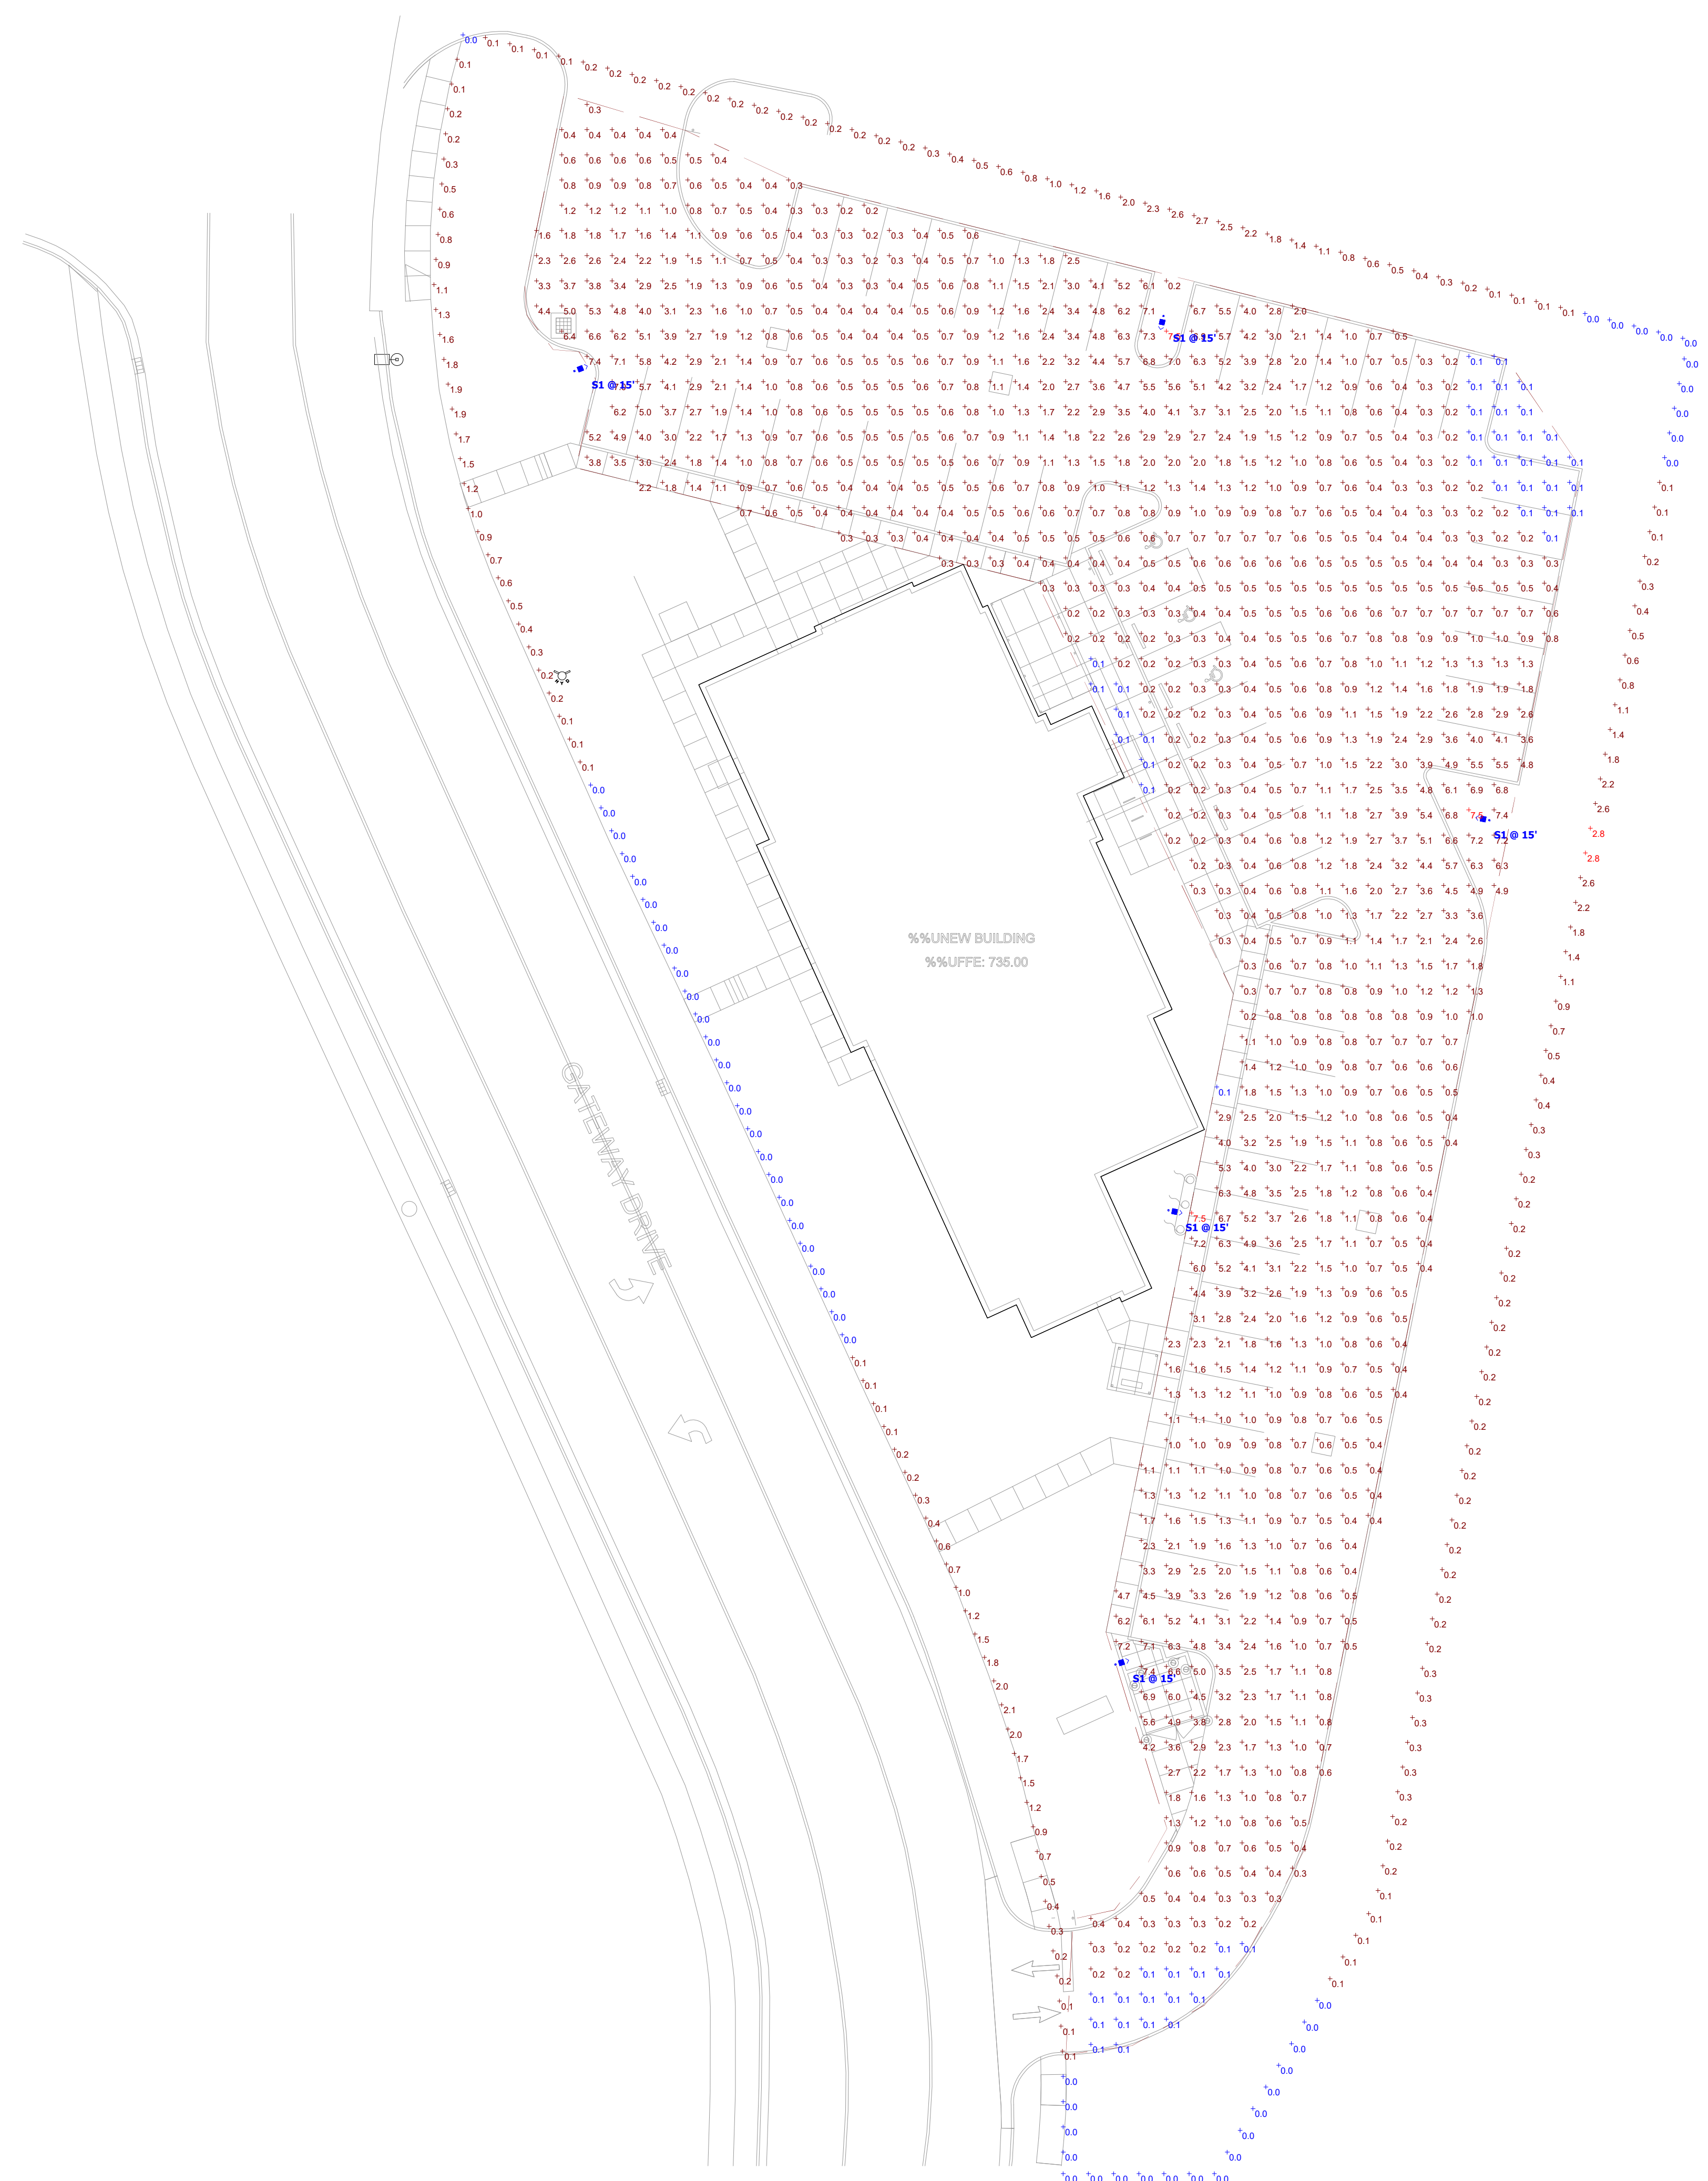

**GENESIS Lighting Solutions**

TYPE S1

**GLSPARK150**




- FEATURES:**
- High performance LED Fixture 110LM/W
  - Replaces 400W Metal Halide fixtures
  - Multiple mounting options
  - 4 Different Distribution patterns
- ENERGY DATA**
- Input Voltage: 100 - 277
  - Power Factor: >0.95
  - Delivered Lumens: 16,500
  - System Efficacy: (110lm/W)
  - Color Temperature: 5000K
  - Lifetime Hours: 50000
  - Operating Temperature: -13°F- 131°F
  - Color Rendering Index (CRI) : >80
  - IP Rating: IP65
- WARRANTY**
- 5 - year limited warranty.
- Note: Actual performance may differ as a result of end user environment and application. All values are design or typical values measure under laboratory conditions.

**Ordering Information:** Example: GLSPARK150WT5

MODEL	WATTAGE	OPTICS	KELVIN	VOLTAGE	MOUNT	FINISH	OPTIONS
GLSPARK	150W	T5	5000	120/277	Type: A	Bronze	

<b>GLSPARK</b>	<b>100W</b>	Type 2	<b>5000</b>	<b>120/277v</b>	Type: A	Bronze	Photocell
	<b>150W</b>	Type 3		480v	Type: D		
		<b>Type 4</b>			Type: YM		
		Type 5			Type: A&D		

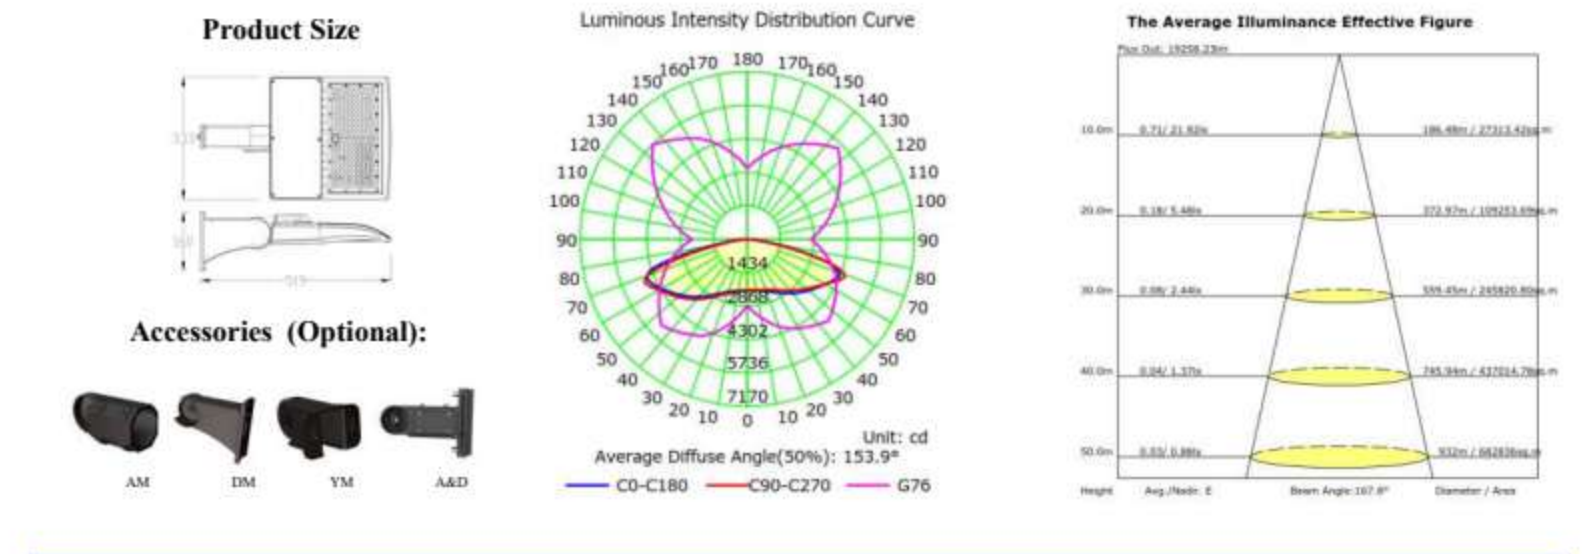

PHOTOMETRIC CALCULATIONS  
SLEEP INN PLAINFIELD  
1331 SECTION STREET  
PLAINFIELD, IN