

GENERAL LANDSCAPE NOTES & SPECIFICATIONS

PART 1: GENERAL

BY BIDDING ON THIS PROJECT AND/OR SIGNING A CONTRACT FOR LANDSCAPE WORK, THE CONTRACTOR ACKNOWLEDGES THAT HE/SHE HAS READ AND UNDERSTOOD THESE SPECIFICATIONS IN THEIR ENTIRETY, HE/SHE HAS INSPECTED THE SITE, AND THAT HE/SHE WILL ABIDE BY THE PLANS, SPECIFICATIONS, AND CONDITIONS FOUND HEREIN...

1.01 WORK INCLUDED

- 1. CONTRACTOR SHALL OBTAIN AND MAKE SURE THAT ALL NECESSARY PERMITS HAVE BEEN GRANTED TO THE OWNER FOR WORK ON THE PROPERTY. THIS SHALL INCLUDE BUT IS NOT LIMITED TO WORK REQUIRED TO ADJACENT, PROTECTIVE AND/OR RESTRICTIVE RIGHTS OF WAY.

1.02 QUALITY ASSURANCE

- 1. ALL WORK SPECIFIED HEREIN SHALL BE PERFORMED BY A SINGLE FIRM/COMPANY SPECIALIZING IN LANDSCAPE WORK. THE LANDSCAPE ARCHITECT AND THE OWNER RETAIN THE RIGHT TO APPROVE ANY PROPOSED SUBCONTRACTORS PRIOR TO AWARDED CONTRACT.

1.03 SUBMITTALS

- 1. SUBMIT 1 QUART SAMPLES OF THE FOLLOWING MATERIALS: SANDY LOAM TOPSOIL, ORGANIC AMENDMENT, MULCH, AND POTTING SOIL.

1.04 DELIVERY, STORAGE, AND HANDLING

- 1. DO NOT DELIVER MORE PLANT MATERIALS THAT CAN BE PLANTED IN ONE DAY UNLESS ADEQUATE STORAGE AND WATERING FACILITIES ARE AVAILABLE ON JOB SITE.

1.05 JOB CONDITIONS

- 1. UTILITIES: DETERMINE LOCATION OF OVERHEAD AND UNDERGROUND UTILITIES AND PERFORM WORK IN A MANNER WHICH WILL AVOID POSSIBLE DAMAGE.

1.06 UTILITIES

- 1. THE CONTRACTOR SHALL LOCATE AND VERIFY ALL EXISTING AND NEW UTILITY LINE LOCATIONS PRIOR TO PLANTING AND SHALL REPORT ANY CONFLICTS TO THE LANDSCAPE ARCHITECT.

PART 2: PRODUCTS

- 1. THE CONTRACTOR IS REQUIRED TO OBTAIN A SOIL SAMPLE AND PERFORM A SOIL ANALYSIS TEST TO DETERMINE THE EXISTING SOIL COMPOSITION AND CONCLUDE WHETHER IT COMPLIES WITH THE COMPOSITION CRITERIA BELOW.

- 4. TOPSOIL SHALL BE AT A MINIMUM DEPTH OF 6" IN PLANTING BEDS AND 4" DEPTH IN SODDED AREAS. TOPSOIL SHALL CONFORM TO THE FOLLOWING PHYSICAL PROPERTIES:

- CLAY: BETWEEN 7-27 PERCENT
SLILT: BETWEEN 28-50 PERCENT
SAND: LESS THAN 52 PERCENT

LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT CLEAN TOPSOIL, MEETING ANY AND ALL ATTACHED SPECIFICATIONS, EXISTS IN EACH PLANTING BED PRIOR TO PLANTING.

- 2.02 SOIL AMENDMENTS AND FERTILIZERS:
1. PEAT MOSS, PEAT MOSS SHALL BE A COMMERCIAL, BALED SPHAGNUM MATERIAL, FREE OF WOODY MATERIAL, MINERALS, OR FOREIGN MATTER, WITH A PH RANGE OF 3.0 - 5.5.

- 3.02 SOIL PREPARATION
1. GRADING AND SOIL PREPARATION WORK SHALL BE PERFORMED ONLY DURING PERIODS WHEN BEST RESULTS CAN BE OBTAINED. IF THE MOISTURE CONTENT OF THE SOIL IS HIGH ENOUGH THAT WORK WOULD DAMAGE SOIL STRUCTURE, GRADING AND TILLING OPERATIONS SHALL BE SUSPENDED.

2.03 OTHER LANDSCAPE PRODUCTS

- 1. ANTI-DESICCANT: PROTECTIVE FILM EMULSION PROVIDING A PROTECTIVE FILM OVER PLANT SURFACES. PERMEABLE TO PERMIT TRANSPIRATION. MIXED AND APPLIED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND INSTRUCTIONS.

2.04 PLANT MATERIAL

- 1. ALL PLANT MATERIALS SHALL BE INSTALLED ACCORDING TO INDUSTRY STANDARDS AND SHALL BE IN COMPLIANCE WITH APPLICABLE STATE AND FEDERAL LAWS RELATING TO INSPECTION FOR DISEASES AND INSECT INFESTATION AT GROWTH RATE. PLANTS TO BE INSTALLED SHALL BE GROWN IN CONTAINERS.

2.05 GRASS MATERIAL

- 1. TYPES: SOY TYPE SHALL BE AS SPECIFIED ON THE PROVIDED LANDSCAPE PLAN AND ASSOCIATED PLANT SCHEDULE.

PART 3: EXECUTION

3.01 GENERAL

- 1. PROCEED WITH AND COMPLETE LANDSCAPE WORK AS RAPIDLY AS PORTIONS OF THE SITE BECOME AVAILABLE.

- 5. COORDINATION WITH SOD/LAWN: PLANT TREES, PALMS, AND SHRUBS ONLY AFTER FINAL GRADES ARE ESTABLISHED, AND PRIOR TO SODDING OR LAWN ESTABLISHMENT.

3.02 SOIL PREPARATION

- 1. GRADING AND SOIL PREPARATION WORK SHALL BE PERFORMED ONLY DURING PERIODS WHEN BEST RESULTS CAN BE OBTAINED. IF THE MOISTURE CONTENT OF THE SOIL IS HIGH ENOUGH THAT WORK WOULD DAMAGE SOIL STRUCTURE, GRADING AND TILLING OPERATIONS SHALL BE SUSPENDED.

3.03 TILLING

- 1. BEFORE MIXING, CLEAN SOIL OF ROOTS, PLANTS, CLAY LUMPS, STONES IN EXCESS OF 1" IN DIAMETER, AND OTHER FOREIGN MATERIALS.

3.04 FINE FINISH GRADING

- 1. WHEN PRELIMINARY GRADING HAS BEEN COMPLETED AND THE SOIL HAS DRIED SUFFICIENTLY TO BE READY FOR FINISH GRADING, ALL LAWN AND PLANTING AREAS SHALL BE GRADED TO THE ELEVATIONS INDICATED ON THE ENGINEERING PLANS.

- 5. AZELES AND OTHER ERICACEOUS AND ACID-LOVING PLANTS SHALL BE BACKFILLED WITH A MIXTURE OF 20% TOPSOIL AND 80% ACID PEAT. THE SOIL SHALL BE SET SO THAT THE BASES OF THE PLANTS ARE SLIGHTLY HIGHER THAN THE WATER TABLE OR CONTAINER OR NURSERY AFTER SETTLING.

3.05 TILLING

- 1. BEFORE MIXING, CLEAN SOIL OF ROOTS, PLANTS, CLAY LUMPS, STONES IN EXCESS OF 1" IN DIAMETER, AND OTHER FOREIGN MATERIALS.

3.06 ANNUAL AND SEASONAL COLOR PLANTING

- 1. BEDS SHALL BE MOUNDDED TO A HEIGHT 6" ON TOP OF THE EXISTING GRADE AND COMPOSED OF 50% TOPSOIL AND 50% COMPOST.

3.08 SHAPING AND PRUNING

- 1. ALL PRUNING SHALL BE DONE IN THE PRESENCE OF, AND WITH THE APPROVAL OF, THE OWNER OR LANDSCAPE ARCHITECT. ONLY CLEAN, SHARP TOOLS DESIGNED FOR THIS PURPOSE SHALL BE USED.

3.09 PLANT PREPARATION - DECORATIVE OR STRUCTURAL

- 1. IF SPECIFIED, LANDSCAPING IN PLANTERS SHALL BE INSTALLED USING THE FOLLOWING METHOD:
a. INSTALL 4" DEEP LAYER OF FINE CRUSHED STONE IN BOTTOM OF PLANTER.

3.10 INSTALLING SOD (NEW LAWNS)

- 1. THE CONTRACTOR SHALL SOD ALL AREAS INDICATED AND NOTED ON THE DRAWINGS. NO SODDING SHALL OCCUR UNTIL AREAS TO BE SODDED ARE CLEAR OF ANY ROUGH GRASS, WEEDS AND DEBRIS.

PART 4: MAINTENANCE, ESTABLISHMENT, AND WARRANTY

4.01 ESTABLISHMENT PERIOD AND MAINTENANCE AGREEMENT

- 1. THE MAINTENANCE PERIOD SHALL BEGIN IMMEDIATELY AFTER EACH PLANT IS PLANTED, AND THE CONTRACTOR SHALL CONTINUOUSLY MAINTAIN ALL AREAS INVOLVED IN THIS CONTRACT DURING THE PROGRESS OF THE WORK.

- 13. APPLICATION OF FERTILIZER TO BE DONE BETWEEN THE FORTIETH (40) AND FIFTIETH (50) DAY OF THE ESTABLISHMENT PERIOD. LABEL OR ARCHITECT OR OWNER ARE TO BE NOTIFIED A MINIMUM OF FORTY-EIGHT (48) HOURS IN ADVANCE.

4.02 WARRANTY

- 1. INSTALLER AGREES TO REPAIR OR REPLACE PLANTINGS AND ACCESSORIES THAT FAIL IN MATERIALS, WORKMANSHIP, OR GROWTH WITHIN 24 MONTHS OF SUBSTANTIAL COMPLETION.

GENERAL PLANTING AND LANDSCAPE NOTES

- 1. THE CONTRACTOR SHALL LOCATE AND VERIFY ALL EXISTING AND NEW UTILITY LINE LOCATIONS PRIOR TO PLANTING AND SHALL REPORT ANY CONFLICTS TO THE LANDSCAPE ARCHITECT.

REVISION BLOCK table with columns: ISSUE, REVISION DATE & DESCRIPTION, and a grid for revision numbers 1-8.

CARTER ENGINEERING logo and contact information: 1010 COMMERCIAL DRIVE, BOGART, GA 30622. Phone: P: 770.725.1200, F: 770.725.1204, www.carterengineering.com


SITE DEVELOPMENT PLANS FOR ZAXBY'S RESTAURANT, 2560 E MAIN STREET - PLAINFIELD, IN 46168. SHEET TITLE: LANDSCAPE NOTES. PROJECT NUMBER: 25064ZAX. DATE: 01/14/2026.

COPYRIGHT CARTER ENGINEERING CONSULTANTS, INC. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT PRIOR CONSENT, AGREEMENT AND WRITTEN PERMISSION FROM CARTER ENGINEERING CONSULTANTS, INC.

ENGINEER/DRAWN NOT RESPONSIBLE FOR COST CHANGES DURING PRELIMINARY PHASE. BIDS & QUOTES SHALL BE BASED ON PLANS LABELLED "ISSUE FOR CONSTRUCTION".

COPYRIGHT CARTER ENGINEERING CONSULTANTS, INC. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT PRIOR CONSENT, AGREEMENT AND WRITTEN PERMISSION FROM CARTER ENGINEERING CONSULTANTS, INC.


- (A) SET TREE PLUMB. TRUNK DIAMETER SHALL BE CONSISTENT (WITHOUT ABRUPT CHANGES AND CONSISTENT WITH NOTES AND SPECIFICATIONS)
- (B) REMOVE EXCESS BURLAP WITHOUT DISTURBING ROOTBALL, EXPOSE A MINIMUM 2" OF TOP OF ROOTBALL
- (C) CONTRACTOR SHALL CROWN ALL PLANTING BEDS ADJACENT TO HARDSCAPE/PAVEMENT AREAS TO ENSURE NO STANDING WATER
- (D) HORTICULTURAL SOIL, TYPICAL
- (E) 18" ROOT BARRIER BY "DEEPROOT", UB-18-2, OR APPROVED EQUAL. PROVIDE ONLY WHERE REQUIRED, SEE NOTE.
- (F) ADJACENT HARDSCAPE / PAVEMENT, REFER TO PLANS.
- (G) TREE GUYING, "ARBORTIE" BY "DEEPROOT" OR APPROVED EQUAL. SIZE AND STRENGTH TO MATCH SPECIFIED TREE. ATTACH PER MANUFACTURER SPECIFICATIONS
- (H) (3) 2" SQ. X 3" WOOD STAKES, EQUAL SPACING (SET INSIDE SOIL SAUCER)
- (I) SOIL SAUCER. COVER WITH MULCH. MIN. 4'-6" CONTINUOUS SAUCER TO HOLD WATER
- (J) SOIL SAUCER, 6" MAXIMUM HEIGHT COVER WITH MULCH
- (K) 3" MULCH LAYER OR AS SPECIFIED ON PLANS
- (L) FINISH GRADE, TYPICAL
- (M) BACKFILL, TYPICAL
- (N) 6" COMPACTED FILL LAYER TO PREVENT SETTLING
- (O) LOOSEN FILL OR NATIVE SOIL, REMOVE IMPERVIOUS DEBRIS
- (P) FILL OR NATIVE SOILS

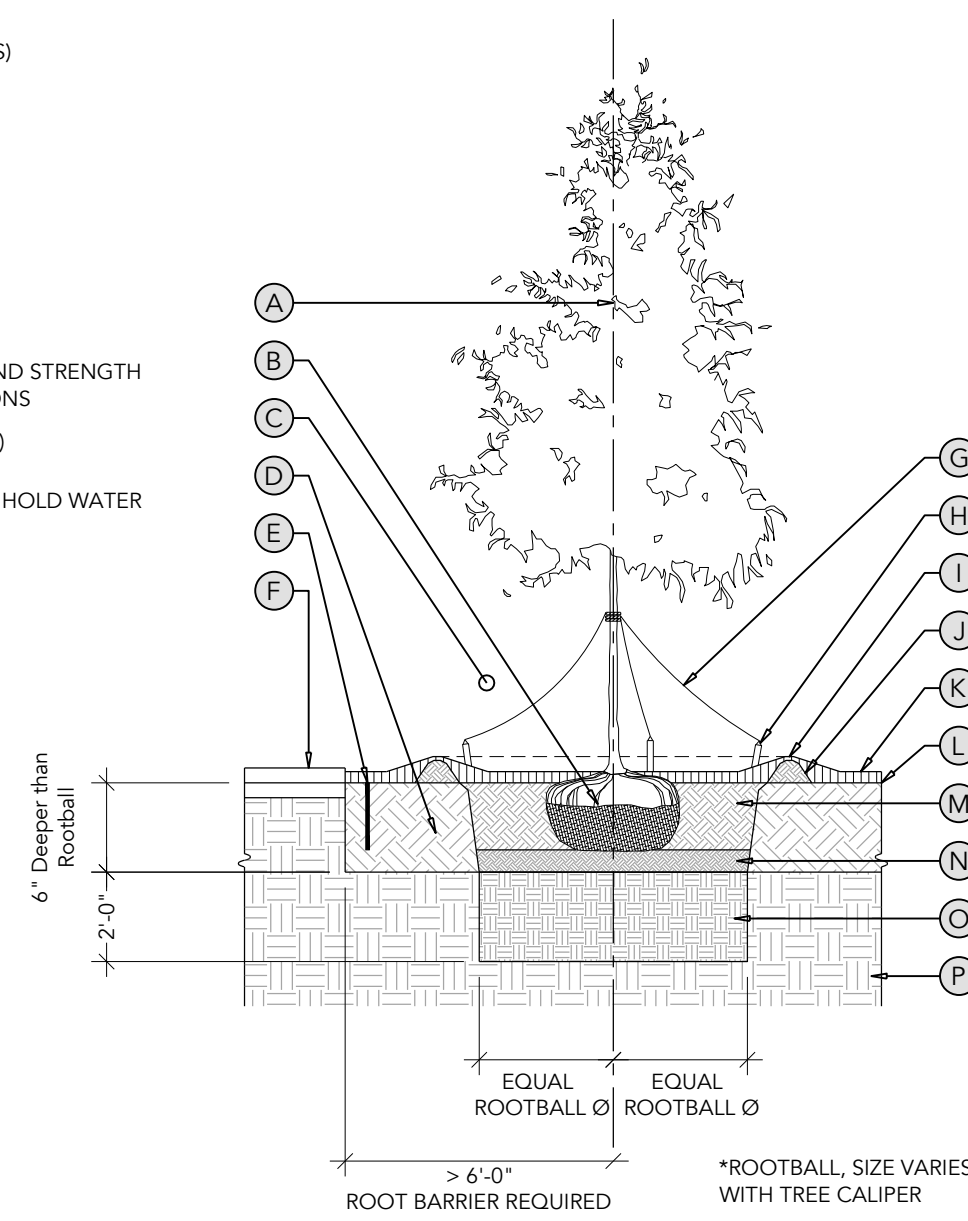

- GENERAL NOTES:**
- "DEEPROOT" PROTECTIVE BARRIER SHALL BE INSTALLED PER MANUFACTURER SPECIFICATION AT EDGE OF PAVEMENT IN ALL AREAS WHERE TREES ARE PLANTED 6' OR LESS FROM EXISTING OR NEW PAVEMENT AND HARDSCAPE.
 - ROOT BARRIER SHALL BE PLACED CONTINUOUS ALONG PAVEMENT AND HARDSCAPE WHERE TREE SPACING IS LESS THAN OR EQUAL TO 20'.
 - WHERE TREE SPACING IS GREATER THAN 20', PLACE ROOT BARRIER IN 20' SEGMENTS AND CENTER ON THE TREE.

1 TREE PLANTING - AT LANDSCAPE
NTS



- (A) SET TREE PLUMB. TRUNK DIAMETER SHALL BE CONSISTENT (WITHOUT ABRUPT CHANGES AND CONSISTENT WITH NOTES AND SPECIFICATIONS)
- (B) REMOVE EXCESS BURLAP WITHOUT DISTURBING ROOTBALL, EXPOSE A MINIMUM 2" OF TOP OF ROOTBALL
- (C) CONTRACTOR SHALL CROWN ALL PLANTING BEDS ADJACENT TO HARDSCAPE/PAVEMENT AREAS TO ENSURE NO STANDING WATER
- (D) HORTICULTURAL SOIL, TYPICAL
- (E) 18" ROOT BARRIER BY "DEEPROOT", UB-18-2, OR APPROVED EQUAL. PROVIDE ONLY WHERE REQUIRED, SEE NOTE.
- (F) ADJACENT HARDSCAPE / PAVEMENT, REFER TO PLANS.
- (G) TREE GUYING, "ARBORTIE" BY "DEEPROOT" OR APPROVED EQUAL. SIZE AND STRENGTH TO MATCH SPECIFIED TREE. ATTACH PER MANUFACTURER SPECIFICATIONS
- (H) 4" MULCH LAYER OVER EXPOSED PORTION OF ROOTBALL
- (I) (3) 2" SQ. X 3" WOOD STAKES, EQUAL SPACING (SET INSIDE EXTENTS OF SOIL SAUCER)
- (J) TURF GRASS, HOLD BACK 18" AROUND TRUNK OF TREE
- (K) TURF SOIL PROFILE, SEE STANDARD DETAIL
- (L) FINISH GRADE, TYPICAL
- (M) BACKFILL, TYPICAL
- (N) 6" COMPACTED FILL LAYER TO PREVENT SETTLING
- (O) LOOSEN FILL OR NATIVE SOIL, REMOVE IMPERVIOUS DEBRIS
- (P) FILL OR NATIVE SOILS

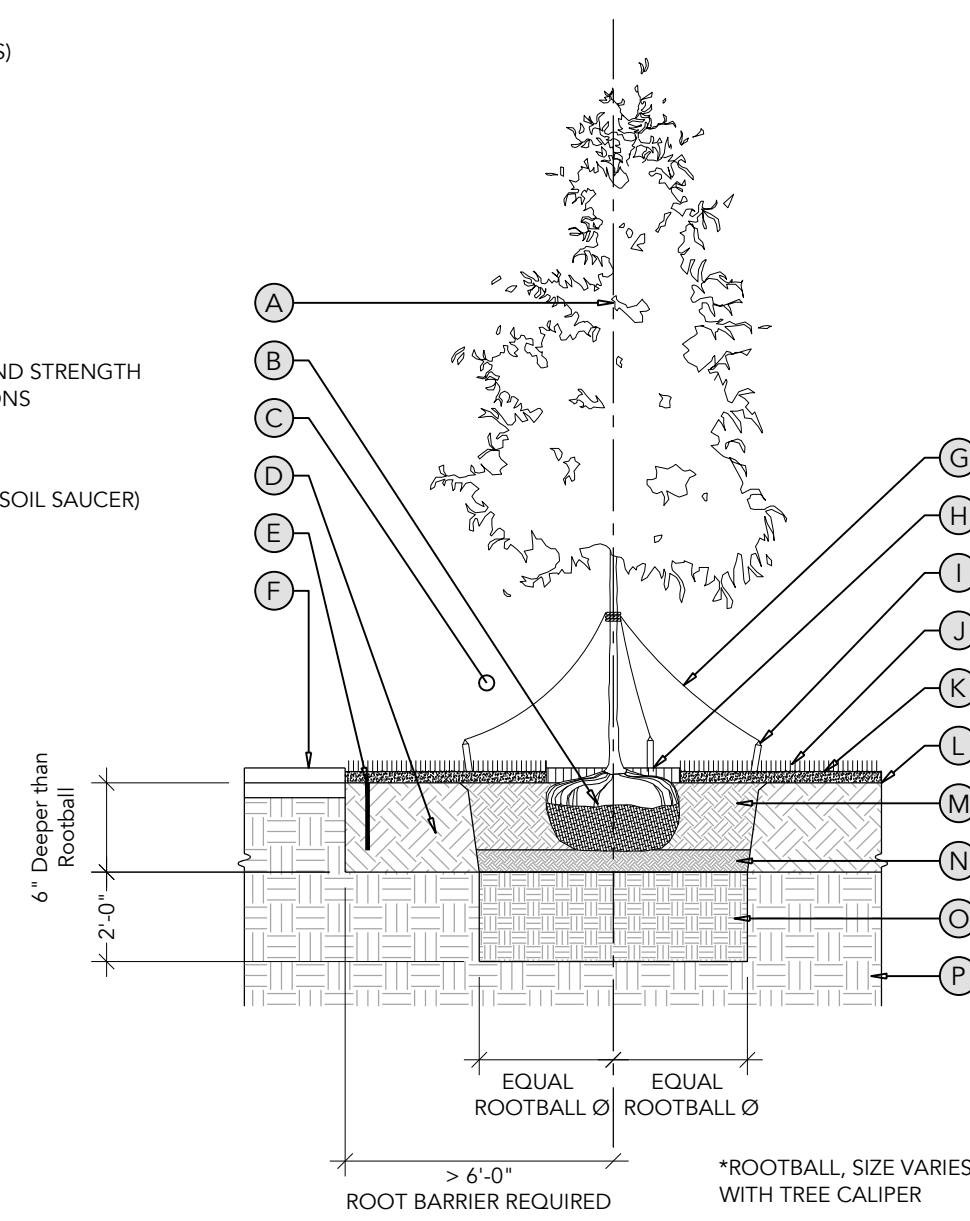

- GENERAL NOTES:**
- "DEEPROOT" PROTECTIVE BARRIER SHALL BE INSTALLED PER MANUFACTURER SPECIFICATION AT EDGE OF PAVEMENT IN ALL AREAS WHERE TREES ARE PLANTED 6' OR LESS FROM EXISTING OR NEW PAVEMENT AND HARDSCAPE.
 - ROOT BARRIER SHALL BE PLACED CONTINUOUS ALONG PAVEMENT AND HARDSCAPE WHERE TREE SPACING IS LESS THAN OR EQUAL TO 20'.
 - WHERE TREE SPACING IS GREATER THAN 20', PLACE ROOT BARRIER IN 20' SEGMENTS AND CENTER ON THE TREE.


2 TREE PLANTING - AT LAWN
NTS

- (A) SET TREE PLUMB. TRUNK DIAMETER SHALL BE CONSISTENT (WITHOUT ABRUPT CHANGES AND CONSISTENT WITH NOTES AND SPECIFICATIONS)
- (B) REMOVE EXCESS BURLAP WITHOUT DISTURBING ROOTBALL, EXPOSE A MINIMUM 2" OF ROOTBALL AND SET FLUSH WITH HIGH SIDE OF FINISHED GRADE
- (C) LEVEL PLANTING ZONE, 2X ROOTBALL DIAMETER
- (D) TREE GUYING, "ARBORTIE" BY "DEEPROOT" OR APPROVED EQUAL. SIZE AND STRENGTH TO MATCH SPECIFIED TREE. ATTACH PER MANUFACTURER SPECS.
- (E) (3) 2" SQ. X 3" WOOD STAKES, EQUAL SPACING (SET INSIDE SOIL SAUCER EXTENTS)
- (F) 3" MULCH LAYER, TYPICAL
- (G) LOOSEN FILL OR NATIVE SOIL, REMOVE IMPERVIOUS DEBRIS
- (H) BACKFILL, TYPICAL
- (I) 6" COMPACTED FILL LAYER TO PREVENT SETTLING
- (J) SOIL SAUCER, BUILD UP AS NEEDED FOR LEVEL PLANTING ZONE, GRADUAL SLOPE TRANSITION TO GRADE, COVER WITH 3" MULCH LAYER, PLANT PER PLANS.
- (K) JUTE NETTING WHERE REQUIRED (WHERE SLOPE IS ≥ 2:1)
- (L) HORTICULTURAL SOILS
- (M) FILL OR NATIVE SOILS
- (N) FINISH GRADE, TYPICAL

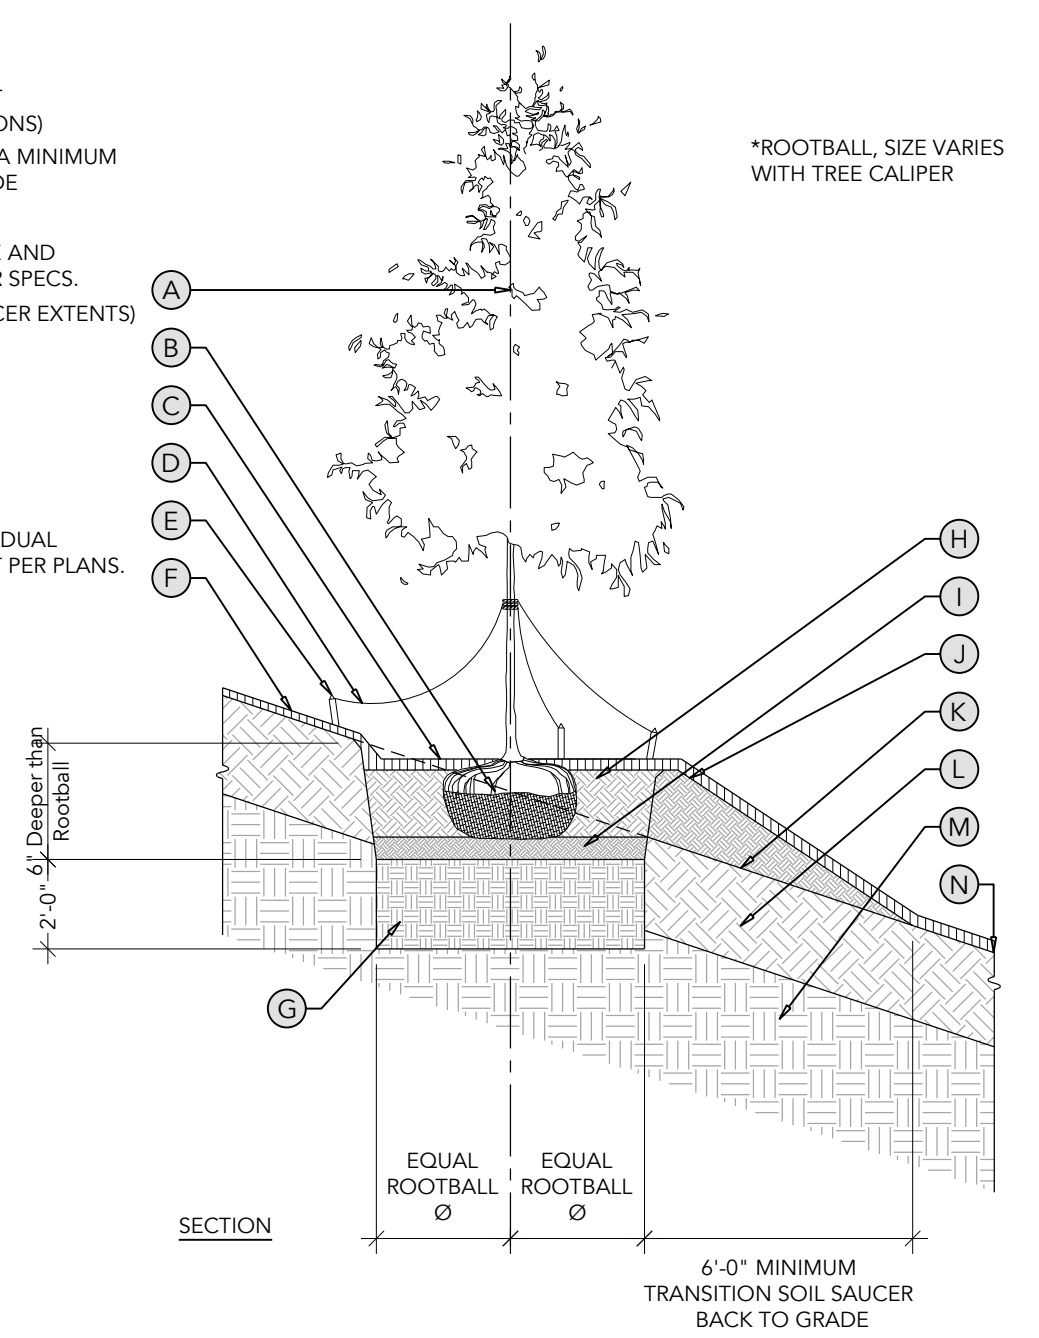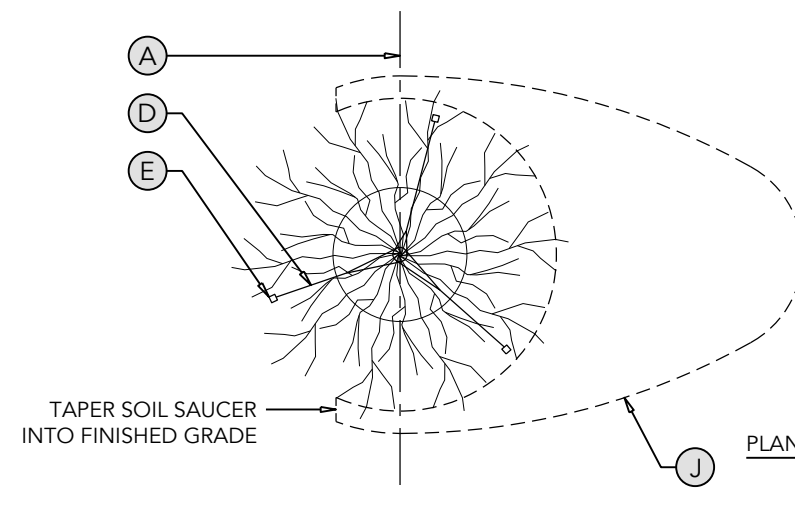


3 TREE PLANTING - ON A SLOPE
NTS

- (A) SET SHRUBS PLUMB, TYPICAL
- (B) ROOTBALL, REMOVE CONTAINER AND LIGHTLY SCARIFY SOIL TO LOOSEN ANY ROOT BINDING
- (C) 3" MULCH LAYER
- (D) FINISHED GRADE
- (E) BACKFILL, TYPICAL
- (F) 3" COMPACTED BACKFILL LAYER TO PREVENT SETTLING
- (G) HORTICULTURAL SOIL
- (H) LOOSEN TOP 4" OF FILL OR NATIVE SOIL
- (I) FILL OR NATIVE SOIL

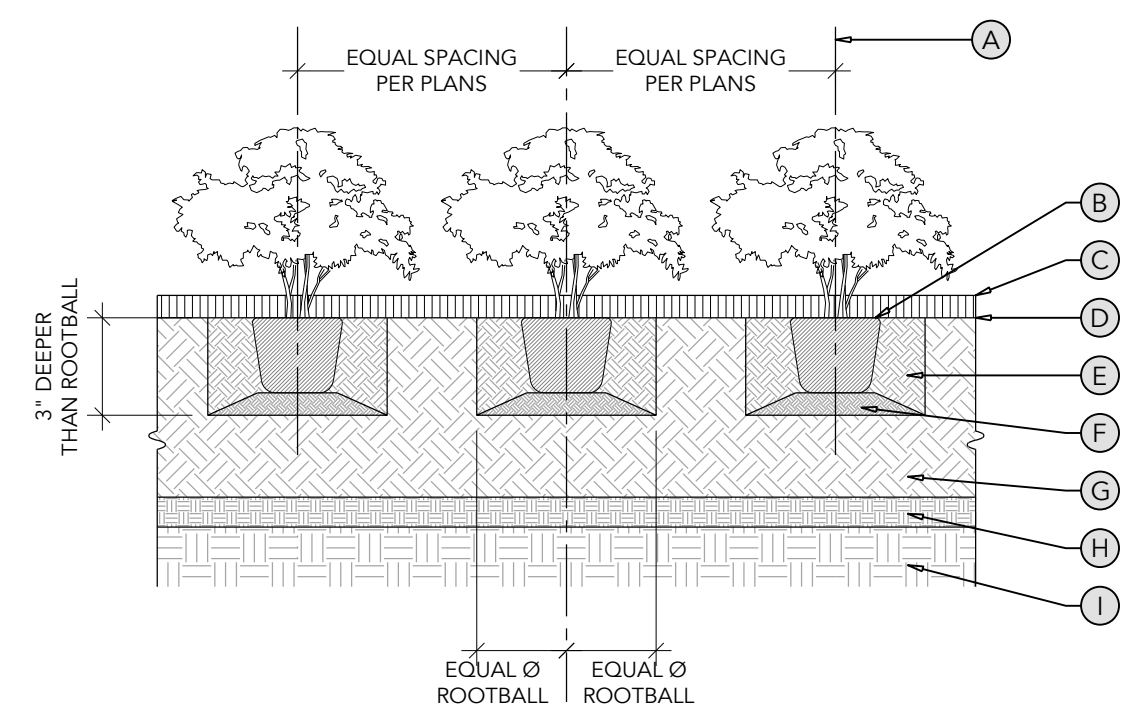


4 SHRUB PLANTING - TYPICAL
NTS

- (A) SET SHRUBS PLUMB, TYPICAL
- (B) ROOTBALL, REMOVE CONTAINER AND LIGHTLY SCARIFY SOIL TO LOOSEN ANY ROOT BINDING
- (C) SOIL SAUCER, BUILD UP AS NEEDED FOR LEVEL PLANTING ZONE, GRADUAL SLOPE TRANSITION TO GRADE, COVER WITH 3" MULCH LAYER
- (D) JUTE NETTING AS REQUIRED FOR SLOPE (INSTALL WHERE SLOPE IS ≥ 2:1)
- (E) 3" MULCH LAYER
- (F) FINISHED GRADE
- (G) BACKFILL, TYPICAL
- (H) 3" COMPACTED BACKFILL LAYER TO PREVENT SETTLING
- (I) HORTICULTURAL SOIL
- (J) LOOSEN TOP 4" OF FILL OR NATIVE SOIL
- (K) FILL OR NATIVE SOIL

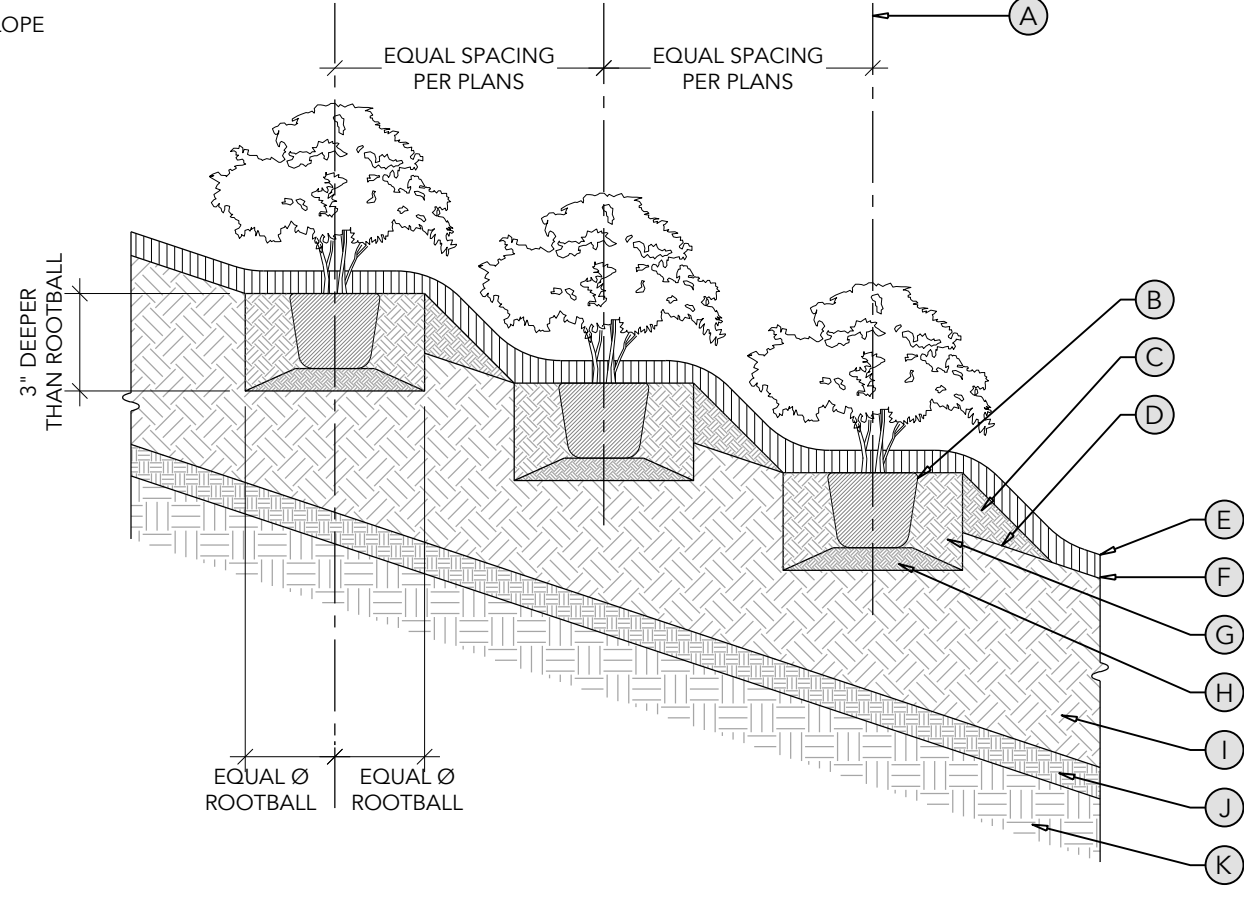

5 SHRUB PLANTING - ON A SLOPE
NTS

- (A) STAGGERED ROWS THROUGHOUT BED
- (B) ALL PROPOSED PLANT MATERIAL SHALL BE INSTALLED ON-CENTER AS SHOWN ON PLAN LIST

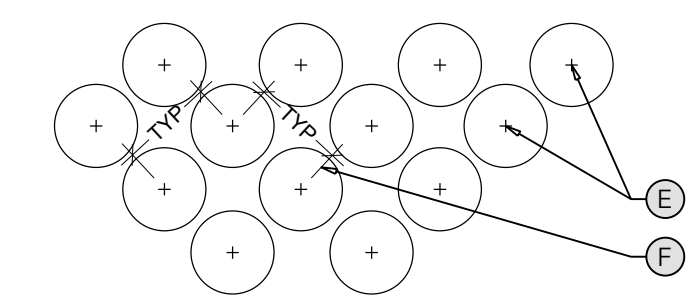


GENERAL NOTES:

- SEE PLANTING PLANS FOR SHRUB AND GROUNDCOVER BED AREAS.
- ROWS SHALL BE STRAIGHT AND PARALLEL.
- SEE PLANTING SCHEDULE AND RATIO TABLE FOR GROUNDCOVER SPACING AND QUANTITIES.
- LAYOUT OF SHRUBS AT THE PLANTING EDGE IS TO BE DONE FIRST TO ESTABLISH A CONTINUOUS LINE. BEST FACE OF SHRUB TO FACE FRONT OF PLANTING BED. REMAINING SHRUBS ARE FILLED IN BEHIND THE FRONT SHRUB LINE, UNLESS SPECIFIED OTHERWISE OR SHOWN INDIVIDUALLY ON PLANS.
- ALL SODDED AREAS SHALL BE ROLLED TO SMOOTH SURFACE.
- NO TREE TO BE PLANTED CLOSER THAN 4" TO ANY BED EDGE.
- WHEN BEDS ARE WITHIN 15' OF AN EXISTING TREE TRUNK, CARE SHALL BE TAKEN IN REMOVING EXISTING GROUNDCOVER TO MINIMIZE IMPACT AND DISTURBANCE OF EXISTING ROOT SYSTEMS. CULTIVATION WITHIN 15' OF EXISTING TREE TRUNKS IS PROHIBITED. TOPDRESS WITH 4" OF TOPSOIL OR COMPOST.
- PLANTING BED EDGE SHALL BE CUT CLEAN AND STRAIGHT.
- MAINTAIN 12" DEAD ZONE AT BED EDGE. CENTER OF DEAD EDGE ZONE SHALL BE 4" BELOW FINISH GRADE OF SOD.

6 SHRUB AND GROUNDCOVER SPACING
NTS


- (A) CONTRACTOR SHALL CREATE A BERM WITH A 1:12 SLOPE (1" FOR EVERY 1 FOOT OF LANDSCAPE ISLAND WIDTH - 8" ISLAND WOULD HAVE AN 8" CROWN)
- (B) PLANTING SOIL PROFILE PER DETAIL
- (C) LOOSEN SUBGRADE PRIOR TO PLACEMENT OF SOIL MIX
- (D) MINIMUM 3" MULCH. HOLD SOIL BACK FROM TOP OF CURB/PAVEMENT TO KEEP MULCH FROM WASHING AWAY
- (E) 12" WIDE "DEAD ZONE" ALONG ALL BED EDGES MAINTAINED WITH CENTERLINE 4" BELOW FINISH GRADE.
- (F) ADJACENT PAVEMENT (CURB & GUTTER SHOWN ON BOTH SIDES)

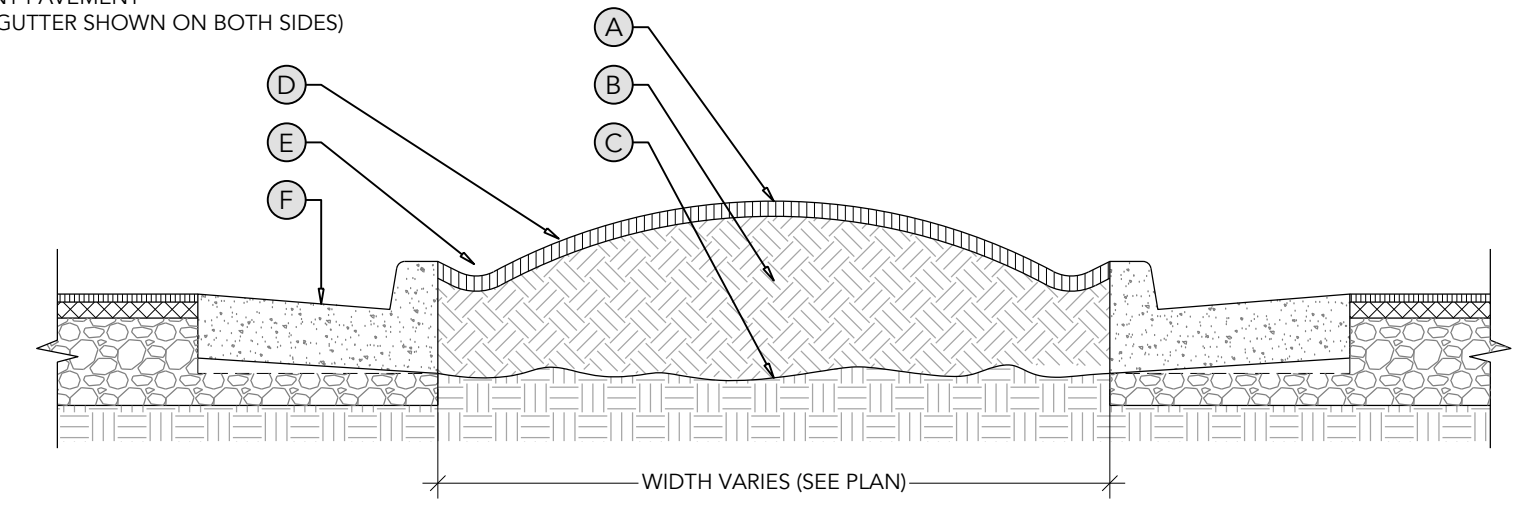

PARKING ISLAND AND ADJACENT PAVEMENT PROFILE

7 GROUNDCOVER AND PLANTING BED DETAILS - STANDARD
NTS


- (A) SET GROUND COVER IN STAGGERED ROWS AT SPECIFIED SPACING (SEE PLANT SCHEDULE). MULCH ENTIRE BED WITH 3" MULCH
- (B) MINIMUM 3" MULCH. HOLD SOIL BACK FROM EDGE OF PAVEMENT TOP TO KEEP MULCH FROM WASHING AWAY.
- (C) ADJACENT PAVEMENTS, SEE PLANS
- (D) SOIL PROFILE PER DETAIL
- (E) LOOSEN PRIOR TO PLACEMENT OF PLANTING SOIL MIX

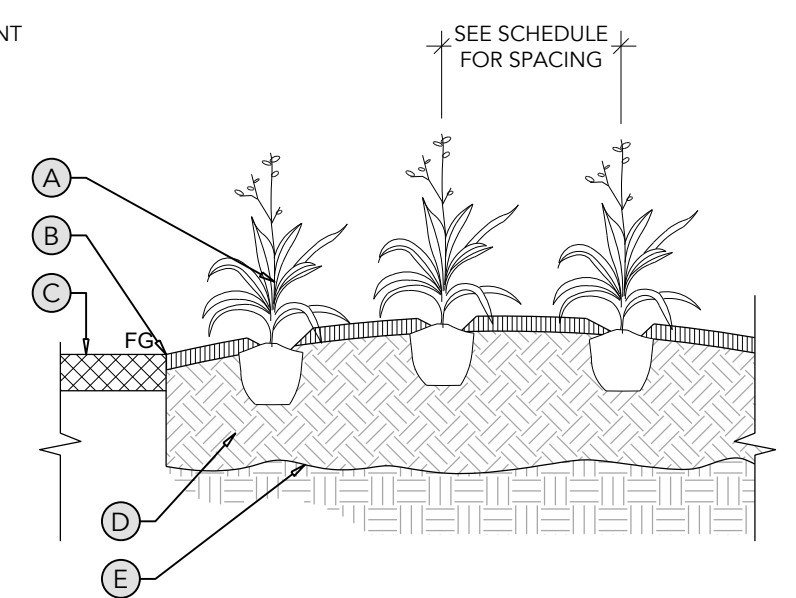


GROUNDCOVER, GRASS, AND PERENNIAL PLANTING

8 SOIL PREPARATION DETAILS
NTS

- (A) FINISH GRADE, HOLD DOWN 2" BELOW ADJACENT PAVEMENT SURFACES
- (B) PLACE 3" MINIMUM LAYER OF MULCH
- (C) PLACE 6" MINIMUM LAYER OF PLANTING SOILS
- (D) MIX PLANTING SOIL INTO TOP 3" LAYER OF TILLED SUBGRADE
- (E) TILL SUBGRADE TO 6" MINIMUM DEPTH
- (F) SUBGRADE: FILL OR NATIVE SOIL
- (G) TURF GRASS SOD
- (H) 2" LAYER OF TOP DRESSING SAND (AS DIRECTED BY OWNER)

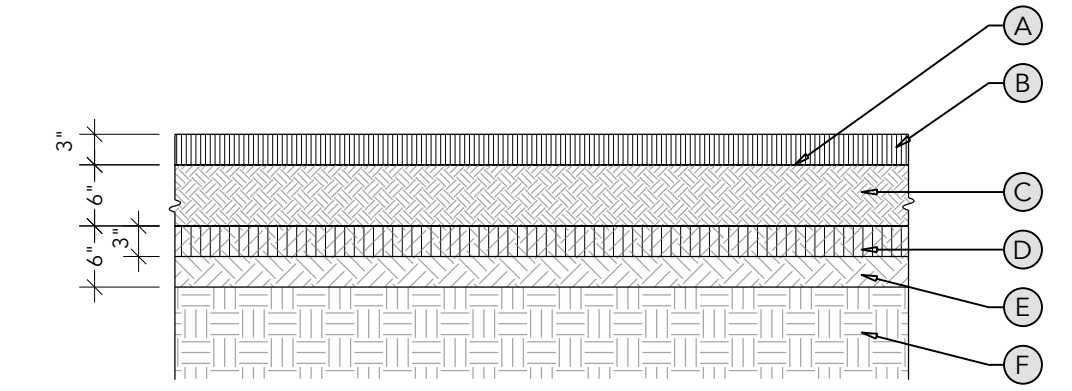

SOIL PREPARATION - PLANTING BEDS

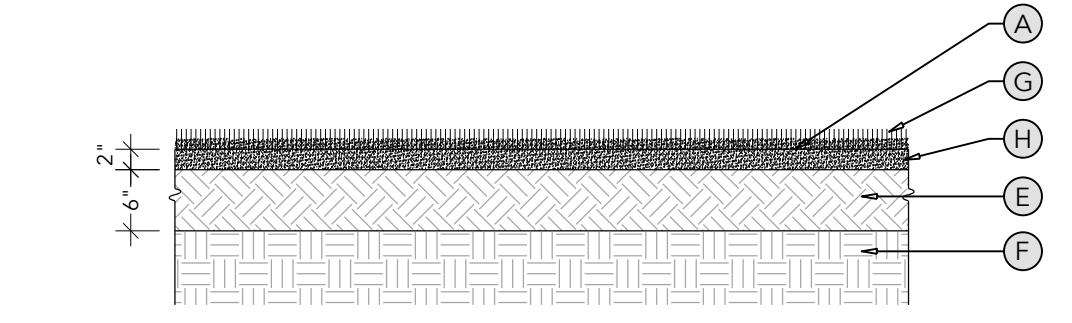


SOIL PREPARATION - TURF GRASS

GENERAL NOTES:

- SEE TECHNICAL SPECIFICATION (32 9113 SOIL PREPARATION) FOR PLANTING SOIL NUTRIENT REQUIREMENTS, AMENDMENTS, AND FURTHER INSTRUCTION ON THE PREPARATION OF PLANTING AREAS.

8 SOIL PREPARATION DETAILS
NTS

REVISION BLOCK	ISSUE	REVISION DATE & DESCRIPTION
1	07/01/2025	INITIAL SUBMITTAL
2	08/07/2025	REVISE DRIVE THRU
3	09/11/2025	PROJECT REVIEW MEETING SUBMITTAL
4	12/07/2025	DRG SUBMITTAL
5	07/14/2026	PLANNING COMMISSION SUBMITTAL
6		
7		
8		

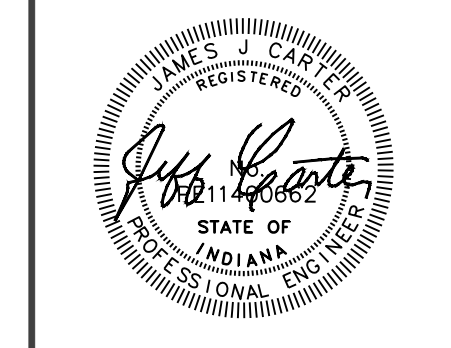

CARTER ENGINEERING
CARTER ENGINEERING
1010 COMMERCE DRIVE
BOGART, GA 30622

P: 770.725.1200
F: 770.725.1204
www.carterengineering.com

SITE DEVELOPMENT PLANS
FOR
ZAXBY'S RESTAURANT
2560 E MAIN STREET - PLAINFIELD, IN 46168

SHEET TITLE:
LANDSCAPE DETAILS

PROJECT NAME:
ZAXBYS

SHEET NUMBER:
L 3.0

PROJECT NUMBER:
25064ZAX

DATE:
01/14/2026

ENGINEER/DESIGNER NOT RESPONSIBLE FOR COST CHANGES DURING PRELIMINARY PHASE. BIDS & QUOTES SHALL BE BASED ON PLANS SETS LABELED "ISSUE FOR CONSTRUCTION".